

# **MEDINA, WASHINGTON**

## **HEARING EXAMINER**

Remote Public Hearing
Thursday, January 13, 2022 – 10:00 AM

## **AGENDA**

## **Virtual Meeting Participation**

City of Medina's city hall is currently closed to the public. The scheduled variance hearing will be held using remote meeting technology. Please either log in or call in a few minutes prior to the start of the meeting to participate. Written comments may still be submitted prior to the hearing by emailing Stephanie Keyser, Planning Manager at <a href="mailto:skeyser@medina-wa.gov">skeyser@medina-wa.gov</a>. These comments are given the same weight as public testimony.

Join Zoom Meeting

https://us06web.zoom.us/j/81349535375?pwd=ZzFkZW5WRmVUYVpZVFRWMjUvdHh4QT09

Meeting ID: 813 4953 5375

Passcode: 040937 One tap mobile

+12532158782,,81349535375#,,,,\*040937# US (Tacoma)

## **Public Hearings:**

**NOTE:** The Hearing Examiner has the discretion to limit testimony to relevant non-repetitive comments and to set time limits in order to ensure an equal opportunity is available for people to testify.

## **PRE-DECISION HEARING:**

File No.: P-21-089 Non-Administrative Variance

**Proposal:** Non-Administrative Variance to reduce the rear yard setback from 30-feet to 16-feet

to accommodate an accessory structure

Location: 8417 NE 12th ST

**Applicant:** Chris Hall (Agent)

Zijiang Yang (Owner)



# **CITY OF MEDINA**

501 EVERGREEN POINT ROAD | PO BOX 144 | MEDINA WA 98039-0144 TELEPHONE 425-233-6400 | www.medina-wa.gov

# STAFF ANALYSIS AND RECOMMENDATION YANG NON-ADMINISTRATIVE VARIANCE APPLICATION

Prepared by: Stephanie Keyser, AICP, Planning Manager Date: January 7, 2022

**Summary of Recommendation:** No recommendation.

PART 1 – GENERAL INFORMATION

<u>CASE NO</u>: P-21-089

LOCATION: 8417 NE 12<sup>th</sup> Street

TAX PARCEL NO: 254070-0025

PROPERTY OWNER: Zijiang Yang (owner)

APPLICANT: Chris Hall (agent)

**LEGAL DESCRIPTION:** 

FINLEYS GARDEN TRS LOT A-1 TGW N 10 FT OF LOT A-2 OF MEDINA SP #83-1 REC #8301240694 SD SP DAF LOTS 5-6-7 & 12-13-14 BLK 1 & POR VAC ST ADJ AKA LOT R 1 OF MEDINA LLA #83-9 REC #8310050800

<u>PROPOSAL</u>: Non-administrative variance to reduce the west rear yard setback from 30-feet to 16-feet to accommodate an accessory structure.

ZONING: Single Family Residence, R-16

**COMPREHENSIVE PLAN DESIGNATION:** Single Family Residential

**CRITICAL AREAS**: Erosion Hazard Area

<u>ENVIRONMENTAL (SEPA) REVIEW</u>: The proposal is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e).

#### **EXHIBITS**:

- 1. Staff Report
- 2. Declaration of Agency, received November 10, 2021
- 3. Statutory Warranty Deed, received November 10, 2021
- 4. Legal Notices
  - a. Notice of Complete Application, dated November 12, 2021
  - b. Notice of Application, dated November 16, 2021
  - c. Notice of Hearing, dated December 15, 2021
- 5. Non-Administrative Variance application, received November 10, 2021

- 6. Site Plan, received November 10, 2021
- 7. Variance Drawings, received November 10, 2021
- 8. Public Comment from Victor Hung, 1034 84th Ave NE, received via email January 6, 2022

#### PART 2 – SITE CHARACTERISTICS

<u>EXISTING CONDITIONS</u>: The subject property is developed with a single-family residence and related site improvements.

## SURROUNDING ZONING:

Direction	Zoning	Present Use
North	Outside of Medina (Clyde Hill)	Residential
South	R-16 District	Residential
East	R-16 District	Residential
West	R-16 District	Residential

ACCESS: Ingress and egress is from a private lane off of NE 12th Street

#### PART 3 – COMPREHENSIVE PLAN

It is the basic policy of the City to retain and promote the high-quality residential setting that has become the hallmark of the Medina community.

The following comprehensive plan goals and policies apply to the proposed project:

LU-G1: To maintain Medina's high-quality residential setting and character.

H-G1: The City shall preserve and foster housing development consistent with Medina's high-quality residential setting.

## PART 4 – AGENCY REVIEW/PUBLIC COMMENT

NOTICES: (Exhibit 4)

Application received:

Determination of Completeness:

Notice of Application:

Notice of Hearing:

November 10, 2021

November 12, 2021

November 16, 2021

December 15, 2021

The application was received on November 10, 2021, and was determined complete on November 12, 2021, pursuant to MMC 16.80.100. A Notice of Application was issued on November 16, 2021, by mailing to property owners pursuant to MMC 16.80.140(B)(2); posting onsite; and posting at other public notices locations (City Hall, Medina Post Office, Park Board, and City of Medina website). A 14-day comment period was used pursuant to MMC 16.80.110(B)(7). A Notice of Hearing was issued on December 15, 2021, consistent with MMC 16.80.120. The notice was mailed to property owners pursuant to MMC 16.80.140(B)(2), published in *The Seattle Times* newspaper, and posted on the site and other public notices locations (City Hall, Medina Post Office, Medina Park Posting Board, and City of Medina website).

Page | 2

<u>GENERAL PUBLIC COMMENTS</u>: As of the date of the staff report, the City received one written comment (Exhibit 8).

Who	Summary of Comments
Victor Hung	Objects to the variance request due to
1034 84 <sup>th</sup> Avenue NE	the structure being not code compliant and this setting a future precedent.
Emailed January 6, 2022	<ul> <li>The existing house is large enough to have space for an office.</li> </ul>
	<ul> <li>An easement isn't a reason for a variance.</li> </ul>

AGENCY COMMENTS: No agency comments were received.

#### PART 5 - STAFF ANALYSIS

#### **GENERAL**:

- 1. Zijiang Yang is the owner and taxpayer of record of the property identified as 8417 NE 12<sup>th</sup> Street, tax parcel no. 254070-0025, according to King County Department of Assessments and the Statutory Warranty Deed (Exhibit 3). The owner has designated Chris Hall as the agent for the project (Exhibit 2).
- 2. The property is zoned R-16 and is approximately 20,430 square feet (.47 acres) in size. The lot is rectangular shaped with maximum overall dimensions of approximately 180 feet in length and approximately 113 feet in width. The lot is developed with a single-family dwelling and related site improvements, including driveway, and landscaping.
- 3. The applicant has requested to reduce the west rear yard setback from 30-feet to 16-feet to accommodate an accessory structure.

## STATE ENVIRONMENTAL POLICY ACT (SEPA):

4. Pursuant to WAC 197-11-800(6)(e), the processing of a variance based on special circumstances applicable to the subject property, such as size, shape, topography, location or surroundings and not resulting in any change in land use or density, are exempt from environmental (SEPA) review. The variance request qualifies for this exemption.

#### CORNER LOTS:

5. 8417 NE 12<sup>th</sup> Street is considered a corner lot because an access easement runs along the east property line. MMC 16.22.030(B) requires corner lots to have two front yard setbacks, a rear yard setback, and a side yard setback with the homeowner having the option of deciding which property line to designate as rear and which to designate as side. Utilizing the existing location of the house, Figure 1 (below) illustrates the setbacks according to the code: front (along NE 12<sup>th</sup> Street); front (along the east property line); side (south property line); rear (west property line).



Figure 1: Setbacks identified per 16.22.030(B)

## **EXISTING NONCONFORMITY:**

- 6. The existing structure is nonconforming to the 30-feet north front yard setback (27'-6" existing) and 17-feet south side yard setback (11'-11" existing) requirements which makes this structure legally nonconforming. MMC 16.12.150 defines a "nonconforming structure" as any structure that does not comply with the required setbacks, height, structural coverage, and other development regulations in which it is located but was lawfully constructed prior to the effective date of the development regulation, or subsequent amendments thereto, and was continually maintained without abandonment as defined in Chapter 16.12 MMC. This term applies whether the nonconformity was permitted by a variance or not.
- 7. The existing residence's northern (front) and southern (side) yard setbacks define it was a nonconforming structure pursuant to MMC 16.12.150. The house was constructed in 1984 under a different development code and is therefore considered a legal nonconforming structure.

#### **DEVELOPMENT STANDARDS:**

8. Minimum zoning setback requirements are set forth in Table 16.22.030(A). A 20,430 square foot lot requires a setback distance of 30 feet from the front and rear property lines. For properties larger than 20,000 square feet, the side yard setback is the greater of 10 feet or 15% of the lot width, not to exceed 20 feet. For this property, the side-yard setback is 17-feet (113.5 \* .15 = 17).

- 9. Maximum structural and impervious surface standards are established in MMC 16.23.020. This property is allowed a maximum structural coverage of 21 percent or 4,290 square feet. With the addition of the accessory structure, this lot's structural coverage would be 4,055 square feet (19.8 percent), which conforms to the code.
  - The maximum impervious surface is 55 percent (11,236.5 square feet) of the lot (Table 16.23.020(A)). With the addition of the accessory structure, the lot's impervious surface would be 8,475.8 square feet, which conforms to the code.
- 10. The height of the proposed accessory structure will be 13'-5" which is below the maximum height of 25 feet (MMC 16.23.050(A)).

## NON-ADMINISTRATIVE VARIANCE:

- 11. Pursuant to MMC 16.72.030(C) and MMC 16.80.060(C), a non-administrative variance application is processed as a Type 3 decision. The Hearing Examiner is authorized to hear and decide non-administrative variance application requests pursuant to MMC 2.78.070 and MMC 16.803.060(C).
- 12. The applicant has requested a variance from dimensional development standards for a reduction in the west rear yard setback in the R-16 zoning district.
- 13. MMC 16.72.030(E) sets forth certain limitations on the granting of a non-administrative variance. This includes:
  - a. Relief from dimensional standards where the application of the dimensional standard would result in an unusual or unreasonable hardship due to physical characteristics of the site.
    - The applicant is requesting relief from dimensional development standards for a reduction in the west side yard setback from 30-feet to 16-feet to install an accessory structure.
  - b. Evidence of other variances granted under similar circumstances shall not be considered in the granting of a non-administrative variance.
    - The applicant has not cited any other variance applications to provide justification for granting this application.
  - c. No variance shall be granted ... to alter any definition or interpretation of this title; to alter a provision establishing a use within a zoning district; or to alter any procedural provisions.
    - The applicant is seeking relief from dimensional development standards for a rear yard setback reduction in the R-16 zoning district. The application does not involve altering any definitions or interpretations, or establishing a use not permitted within the R-16 zone, nor does it alter any procedural requirements of the municipal code.
- 14. The applicant provided information addressing the approval criteria set forth in MMC 16.72.030(F):

a. The variance does not constitute granting of special privilege inconsistent with the limitations upon uses of other properties in the Property's vicinity and zone in which the subject property is located.

<u>APPLICANT RESPONSE</u>: The variance does not grant special privileges inconsistent with uses of other properties located in the vicinity of 8417 NE 12th Street. Using basic aerial imagery provided by Google satellite view, our finding reveals several homes within the neighborhood with accessory structures. Within a half mile radius there are pool houses, sheds, and detached garages that are within 10' of property lines.

We understand some of these may have been grandfathered into the code. But, given their existence, our request is not a special condition using the existing neighborhood's form and function as a benchmark for comparison. Some examples you'll find of other accessory structures are located on NE 12th, 88th place, 86th Ave, NE 9th, etc.

STAFF ANALYSIS: The property is zoned R-16 Single-Family Residence, and a detached single-family dwelling and related appurtenances, including accessory structures are permitted pursuant to MMC 16.21.030. The granting of the variance would not alter this use. The proposal is, therefore, consistent with the limitations on uses of other properties in the vicinity and in the R-16 zone.

b. The variance is necessary because of special circumstances relating to the size, shape, topography, location, or surroundings of the subject property, to provide it with use rights and privileges permitted to other properties in the vicinity and in the zone in which the property is located.

<u>APPLICANT RESPONSE</u>: The variance is necessary because of special circumstances relating to the location of the property. There is a 14' wide private lane that is a right of way for accessing properties located off of NE 12th Street. This acts as a direct reduction in the availability of buildable space at the front of the property, subsequently resulting in the loss of rear yard space, due to the placement of the primary home being pushed back towards the rear property line.

With the accessory structure placed at 16' from the rear property line, there is minimal to no impact on existing mature trees, landscaping, and pre existing patio and deck structure's. If we move the accessory structure to comply with the 30' rear setback, two mature trees will need to be removed. Also, patio and deck demolition will have to occur to provide separation between the primary home and the accessory structure. Moving the accessory structure closer would result in higher cost implications for our family, due to the time and labor necessary for demolition and landscaping. This would also increase the construction timeline and noise impacts experienced by the neighborhood.

STAFF ANALYSIS: This lot is constrained by the existing house's nonconformity to the current code's northern front and southern side yard setbacks as well as the access easement/private drive along the eastern property line; all three of these factors restrict the available area where an accessory structure can be place. Additionally, the owners have indicated a desire to retain the mature landscape on their property, which does conform to Medina's Comprehensive Plan LU-GI of maintaining Medina's high-quality

residential setting and character<sup>1</sup>. Whether the variance is necessary because of special circumstances relating to the size, shape, topography, location, or surroundings of this property, to provide it with use rights and privileges permitted to other properties in the vicinity and in this zone are for the Hearing Examiner to determine.

c. The variance is necessary to relieve a material hardship that cannot be relieved by any other means such that the material hardship must be related to the land itself and not to problems personal to the applicant.

<u>APPLICANT RESPONSE</u>: The variance is necessary to relieve hardship that cannot be relieved by any other means, as it relates to the land itself. Placing the accessory structure at the 30' setback would result in the removal of two mature trees and construction and demolition of existing landscaping and patio.

In addition, the proposed placement would have the least impact on the existing conditions of the property If the accessory structure was required to be 30' from the rear property line, that would place it closer to the existing home with only 7'8" between the structure and the bay window. This would likely mean that the structure is more visible from the private lane. To maintain and support Medina's interest in preserving the character of its neighborhoods, our proposed placement would result in no public viewing of the accessory structure. The property is surrounded by trees and shrubbery ranging from 10-25' in height. The accessory structure meets all other requirements of the Medina zoning code, including but not limited to, height, yard coverage, impervious surface area, and floor area ratio.

STAFF ANALYSIS: The applicant is limited to where an accessory structure can be placed on the lot (Figure 2). The placement has considered the existing mature landscape on site and has tried to limit the impact on neighbors. Whether this constitutes a material hardship related to the land itself is for the Hearing Examiner to decide.

Page | 7

<sup>&</sup>lt;sup>1</sup> Character in Medina has historically been linked to a forested environment.

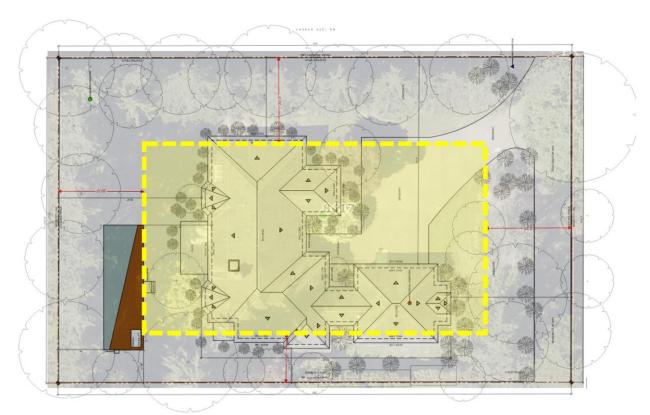


Figure 2: The available building envelope (building envelope = lot - setbacks) is shown in yellow

d. The granting of the variance will not be materially detrimental to the public welfare or injurious to the property or improvements in the vicinity and zone in which the subject property is situated.

<u>APPLICANT RESPONSE</u>: The granting of such variance will not be materially detrimental to the public welfare of the surrounding vicinity. Placing our prefabricated L&I approved structure, results in a drastic reduction in environmental impacts to the surrounding properties. Our on-site construction is completed in less than three weeks.

A site built structure of comparable size would require six months of ongoing construction. Resulting in no noise pollution, material waste, air quality impacts, and frustrated community members.

The 16' rear setback allows for the preservation of on-site landscaping and mature trees to remain. Both these elements add value to the neighborhood by providing privacy, and ecological vibrancy.

STAFF ANALYSIS: The request is for a reduction in the west rear yard setback from 30-feet to 16-feet to install an accessory structure. The specific location was intentionally chosen so that the owners could keep the mature landscaping and protect their and their neighbor's privacy. The proposed location of the accessory structure will be approximately 36-feet from the closest roof edge of the neighbor to the west, and approximately 21-feet from the closest roof edge of the neighbor to the south. The proposal will not cause a

change in the use of the property and once construction is completed, this proposal will not create new impacts from noise, light or traffic.

e. The variance is the minimum necessary to provide reasonable relief.

<u>APPLICANT RESPONSE</u>: The variance is the minimum necessary to provide reasonable relief to our family and Medina community members. This is the least restrictive variance that can be given. We are not requesting an additional size increase, height increase, conditional use change, or the removal of protected trees. The structure meets FAR, height, yard coverage, impervious surface area, and use. Our structure is 609 SQ FT, making it less than 22% of the total square footage of the gross floor area of the single-family dwelling. This is 18% less than the requirement outlined in Medina's code 20.34.020-2.

Relief is needed as our family adjusts to the demands of working and living out of the same space. The pandemic has redefined our nation's work patterns. The accessory structure allows our family to properly adjust and thrive in Medina.

<u>STAFF ANALYSIS</u>: The applicant has indicated that this is the minimum necessary to provide relief and install an accessory structure in their backyard. Whether this request for a variance is the minimum necessary to provide reasonable relief is for the hearing examiner to determine.

#### **PUBLIC COMMENTS**

- 15. As of the date of this staff report, the City received one (1) letter of opposition from Victor Hung (1034 84<sup>th</sup> Avenue NE) via email on January 6, 2022. The letter objects to the variance because the DADU is not code compliant. Mr. Hung further states that it is hard to believe there is not space for an office in the house, and that an access easement should not be a reason for a variance.
- 16. The letter was received after the November 30, 2021, public comment deadline. For comments that are received by the deadline, the City requires the applicant provide a response to the concerns and issues that are raised. As this was received well after the close the of the comment period, this was forwarded to the applicant, but they were not asked to respond; the applicant will have an opportunity to do that during the pre-decision hearing.
- 17. As to the points raised in the letter, Mr. Hung does not clarify the way in which he believes the structure to be non-compliant with the code. The request is for a reduction in a rear yard setback for a lot that is constrained by Medina's code by being a corner lot, and therefore subject to having two front setbacks, one rear setback, and only one side. If this parcel did not have the access easement along the eastern portion of the lot, the setback where the proposed structure would be located would be considered a side and the applicant would likely not have to go through the variance process. If the concern over non-compliance relates to the fact that the proposed structure is a prefabricated building, it should be noted that there is nothing in Medina's development code that prohibits this type of structure. The variance concerns a reduction in a setback, not whether this type of structure can be installed on the lot. During building review, this structure will be reviewed to ensure that it meets the building code. Finally, by their nature variances do not and cannot set a precedence. Variances are

site specific and just because a variance was granted for a similar set of circumstances does not mean a similar request on a different lot will be granted.

## **PART 6 - CONCLUSION**

- 1. Pursuant to MMC 2.78.070 and MMC 16.80.060(C), the Hearing Examiner has the authority to hold a public hearing and decide non-administrative variance applications. The applicant has requested the non-administrative variance to reduce the west rear yard setback from 30-feet to 16-feet to accommodate an accessory structure.
- 2. Proper notice for this public hearing has been provided. Notices was posted on the property and mailed to surrounding property owners within 300 feet or 3 parcels depth, which is greater but not to exceed 1,000 feet, published in the Seattle Times newspaper on December 15, 2021, more than 15 days prior to the date of the hearing (Exhibit 4c).
- 3. Pursuant to MMC 16.72.030(F), a non-administrative variance application may only be approved if the following criteria are met:
  - a. The variance does not constitute a granting of special privilege inconsistent with the limitation upon uses of other properties in the vicinity and zone in which the subject property is located.
    - <u>CONCLUSION</u>: See Analysis 14a. The Hearing Examiner will need to conclude whether this criterion is satisfied.
  - b. The variance is necessary, because of special circumstances relating to the size, shape, topography, location, or surroundings of the subject property, to provide it with use rights and privileges permitted to other properties in the vicinity and in the zone in which the subject property is located.
    - <u>CONCLUSION</u>: See Analysis 14b. The Hearing Examiner will need to conclude whether this criterion is satisfied.
  - c. The variance is necessary to relieve a material hardship that cannot be relieved by any other means such that the material hardship must relate to the land itself and not to problems personal to the applicant.
    - <u>CONCLUSION</u>: See Analysis 14c. The Hearing Examiner will need to conclude whether this criterion is satisfied.
  - d. The granting of such variance will not be materially detrimental to the public welfare or injurious to the property or improvements in the vicinity and zone in which the subject property is situated.
    - <u>CONCLUSION</u>: See Analysis 14d. The Hearing Examiner will need to conclude whether this criterion is satisfied.
  - e. The variance is the minimum necessary to provide reasonable relief.

<u>CONCLUSION</u>: See Analysis 14e. The Hearing Examiner will need to conclude whether this criterion is satisfied.

## **PART 7 – STAFF RECOMMENDATION**

As a matter of policy, staff does not make a recommendation on non-administrative variance applications. If the request for a non-administrative variance is granted, however, staff recommends the following conditions be included:

- 1. Relief from the west rear yard setback is granted only to the extent shown in Exhibit 7, which indicates a new western rear yard setback of 16-feet. Any modifications to the plans as they have been submitted in Exhibit 7 shall require a new variance.
- 2. All other zoning and development regulations applicable to the project shall be followed and confirmed during building permit review.
- 3. Pertinent construction permits shall be obtained prior to starting construction activity.
- 4. An approved non-administrative variance shall expire if within one year of the date the decision of the non-administrative variance becomes final, a complete building permit application is not submitted. A six-month extension may be granted pursuant to MMC 16.72.030(H).

Stephanie Keyser, AICP Date

Planning Manager



# DEVELOPMENT SERVICES

OWNER'S Exhibit 2
DECLARATION OF A-05
AGENCY

501 EVERGREEN POINT ROAD MEDINA, WA 98039 PHONE: 425-233-6414/6400

Project Address 8417 NE 12th Street	Parcel No.	254070-0025
I/We Zijiang Yang do hereby declare and affirm that I/we are the owners or contract purchasers of the above property	are:	
	a Washington o	corporation or trust which is the owner
of the above property. I am duly authorized by this entity to represent the above pr	operty in matte	ers of ownership, land use, and
construction. Attached, please find a copy of the Power of Attorney or other docum	nent by which I	have been appointed.
AGENCY		
I/We are applying for one or more permits for development of the above property. I/We	understand tha	at the proposed work may also include
additional permits for land use approvals.		
For the purposes of applying for the applicable permits and managing the owner's responsy land use permits associated with this project, I/we	onsibility for co	mpliance with the approved plans and
☐ will act as my own agent		
do hereby appoint Chris Hall to act as		ealing with the City of Medina in all
acts and decisions related to processing the application for permit, review and app and coordination of required inspections and project approvals.	proval of the app	plication, authorization of revisions,
AGREEMENT TO CONDITIONS		
I/We agree as a condition of this permit:		
To comply with all applicable codes, ordinances, laws and conditions of approval		
<ul> <li>To ensure that all work shall be done in accord with the approved plans and spec approval of the Building Official. I/We will provide all data and details of revisions</li> </ul>		
any work that differs from the approved plans. The official approved plans for the		•
dated as approved by the City of Medina.		
To inform all contractors, subcontractors and workers of these conditions and any util enforce compliance therete.	y project mitiga	tion requirements agreed to, and I/we
<ul> <li>will enforce compliance thereto.</li> <li>To maintain the approved plans, all correction notices, all inspection reports, and</li> </ul>	all permit docu	ments on the project site and readily
available to the inspectors.	an permit dead	mente en ale project due una reduity
To ensure that requests are made to the City for the required inspections. Failure	•	•
the work is ready for inspection may necessitate the removal of some of the cons perform required inspections.	truction materia	als at the owner's expense in order to
To cause all certifications required by the City to be completed and to reconcile the complete of the com	ne permit fees (	upon completion of the work. I/We
understand that the City will not issue a Certificate of Completion or a Certificate		•
<ul> <li>I/We acknowledge that consultant fees may be incurred as a result of the review responsible for the payment of these fees and understand that the payment of the</li> </ul>	-	
Occupancy.	ese iees is ieqi	arred prior to issuance of a Certificate of
SALES TAX		Name to the state of the state
All contractors and vendors must report sales taxes for transactions in the City of Medir digit location code for the City of Medina is 1718.	ia on quarterly	combined excise tax returns. The 4-
aight totalloin doubt for the only of incoming to 17 Tot		
OWNER OR OFFICER/REPRESENTATIVE NAME AND SIGNATURES I HAVE READ, UNDERSTOOD AND AGREE TO THE ABOVE REQUIREMENTS.		
Signature Date 11/9/202	21	
Name Zijiang Yang		

# Owner Declaration of Agency

Final Audit Report 2021-11-09

Created:

2021-11-09

By:

Christopher Hall (chris@abodu.com)

Status:

Signed

Transaction ID:

CBJCHBCAABAAEuXHxX2NNj6\_3wsgT8-rY03-a21X\_lgs

# "Owner Declaration of Agency" History

- Document created by Christopher Hall (chris@abodu.com) 2021-11-09 9:09:18 PM GMT
- Document emailed to Zijiang Yang (zijiang.yang.us@gmail.com) for signature 2021-11-09 9:09:38 PM GMT
- Email viewed by Zijiang Yang (zijiang.yang.us@gmail.com) 2021-11-09 9:24:17 PM GMT- IP address: 74.125.209.57
- Document e-signed by Zijiang Yang (zijiang.yang.us@gmail.com)

  Signature Date: 2021-11-09 9:25:33 PM GMT Time Source: server- IP address: 73.169.194.244
- Agreement completed. 2021-11-09 - 9:25:33 PM GMT

Instrument Number: 20200626001324 Document: WD Rec: \$104.50 Page-1 of 2
Excise Docs: 3053761 Selling Price: \$1,850,000.00 Tax Amount: \$37,180.00 Record Date: 6/26/2020 12:47 PM
Electronically Recorded King County, WA

Exhibit 3

AFTER RECORDING MAIL TO:

Zijiang Yang and Sinan Li 8417 NE 12th Street Medina, WA 98039

Filed for Record at Request of: First American Title Insurance Company Space above this line for Recorders use only

CANAL SITE AND THE STREET OF T

FIRST AMERICAN 3409023 STATUTORY WARRANTY DEED

File No: 4244-3409023 (CY)

Date: June 09, 2020

Grantor(s): Satyajeet Parakh and Deepak Marda

Grantee(s): Zijiang Yang and Sinan Li

Abbreviated Legal: LOT A-1 AND PTN LOT A-2 OF SP NO. 83-1, REC. 8301240694, KING

COUNTY

Additional Legal on page:

Assessor's Tax Parcel No(s): 254070002509

THE GRANTOR(S) SATYAJEET PARAKH AND DEEPAK MARDA, EACH AS THEIR SEPARATE ESTATE for and in consideration of Ten Dollars and other Good and Valuable Consideration, in hand paid, conveys, and warrants to Zijiang Yang and Sinan Li, a married couple, the following described real estate, situated in the County of King, State of Washington.

**LEGAL DESCRIPTION:** Real property in the County of King, State of Washington, described as follows:

LOT A-1 TOGETHER WITH THE NORTH 10 FEET OF LOT A-2 OF SHORT PLAT NO. 83-1, ACCORDING TO THE SHORT PLAT SURVEY RECORDED UNDER KING COUNTY RECORDING NO. 8301240694;

(ALSO KNOWN AS R-1 OF LOT LINE REVISION NO. 83-9 RECORDED UNDER RECORDING NO. 8310050800);

SITUATE IN THE CITY OF MEDINA, COUNTY OF KING, STATE OF WASHINGTON.

Subject To: This conveyance is subject to covenants, conditions, restrictions and easements, if any, affecting title, which may appear in the public record, including those shown on any recorded plat or survey.

LPB 10-05

#### AFTER RECORDING MAIL TO:

Zijiang Yang and Sinan Li 8417 NE 12th Street Medina, WA 98039

Filed for Record at Request of:

Space above this line for Recorders use only

First American Title Insurance Company

FIRST AMERICAN 3409023

STATUTORY WARRANTY DEED

File No: 4244-3409023 (CY)

Date: June 09, 2020

Grantor(s): Satyajeet Parakh and Deepak Marda

Grantee(s): Zijiang Yang and Sinan Li

Abbreviated Legal: LOT A-1 AND PTN LOT A-2 OF SP NO. 83-1, REC. 8301240694, KING

COUNTY

Additional Legal on page:

Assessor's Tax Parcel No(s): 254070002509

THE GRANTOR(S) SATYAJEET PARAKH AND DEEPAK MARDA, EACH AS THEIR SEPARATE ESTATE for and in consideration of Ten Dollars and other Good and Valuable Consideration, in hand paid, conveys, and warrants to Zijiang Yang and Sinan Li, a married couple, the following described real estate, situated in the County of King, State of Washington.

**LEGAL DESCRIPTION:** Real property in the County of King, State of Washington, described as follows:

LOT A-1 TOGETHER WITH THE NORTH 10 FEET OF LOT A-2 OF SHORT PLAT NO. 83-1, ACCORDING TO THE SHORT PLAT SURVEY RECORDED UNDER KING COUNTY RECORDING NO. 8301240694;

(ALSO KNOWN AS R-1 OF LOT LINE REVISION NO. 83-9 RECORDED UNDER RECORDING NO. 8310050800);

SITUATE IN THE CITY OF MEDINA, COUNTY OF KING, STATE OF WASHINGTON.

Subject To: This conveyance is subject to covenants, conditions, restrictions and easements, if any, affecting title, which may appear in the public record, including those shown on any recorded plat or survey.

LPB 10-05

APN: 254070002509

Statutory Warranty Deed continued

File No.: 4244-3409023 (CY)

Satyajeet Parakh by 6.7 Satyajeet Parakh by G. Michael Zeno Jr, referee under King County Superior Court case no. 18-2-15543-6 SEA, as Agent	Michael Zwofr, referee ader King County Superior Lourt case no. 118-2-15543-6 SEA, as Agent

Deepak Marda by G. Michael Zeno, Jr. referee under King County Superior Court case no. 18-2-15543-6 SEA. as Agent

Deepak Marda by G. M. charl Jeno, fr., referee under eepak Marda by G. Michael Zeno, Jr. referee lider King County Superior Court case no. 18-15543-6 SEA. as Agent

Ling County Superior Court case no. 18-2-15543-6 SEA. as Agent

as Agent

STATE OF Washington **COUNTY OF** King

day of June, 2020, before me personally appeared G. Michael Zeno, Jr, referee under King County case no. 18-2-15543-6, as representative to me known to be the individual who executed the foregoing instrument as Attorney in Fact for Satyajeet Parakh and Deepak Marda and acknowledged that he she signed the same as his her free and voluntary act and deed as Attorney in Fact for said principal for the uses and purposes therein mentioned, and on oath stated that the Power of Attorney authorizing the execution of this instrument has not been revoked and that the said principal is now living, and is not incompetent.

GIVEN under my hand and official seal the day and year last above written.

**ANDY YIP Notary Public** State of Washington My Appointment Expires Jul 19, 2021

Notary Public in and for the State of Washington

Residing at: Bellevue, M My appointment expires: Ily 19, 2021

har filly

Page 2 of 2

LPB 10-05



# **CITY OF MEDINA**

501 EVERGREEN POINT ROAD | PO BOX 144 | MEDINA WA 98039-0144 TELEPHONE 425-233-6400 | www.medina-wa.gov

November 12, 2021

Chris Hall 2424 El Camino Real Redwood City, CA 94063 (via email: chris@abodu.com)

**Re:** Determination of Complete Application – P-21-089

8417 NE 12th Street

Dear Mr. Hall,

The City has reviewed the above referenced application for a request for a non-administrative variance to reduce the rear setback from 30-feet to 16-feet for an accessory structure at 8417 NE 12<sup>th</sup> Street and has determined it is complete pursuant to MMC 16.80.100. The City will issue a Notice of Application to notify parties of the application in accordance with MMC 16.80.110. The notice will be mailed and posted by the City within 14 days of the date of this letter pursuant to MMC 16.80.140.

Please be aware that this determination does not preclude the City from requesting additional information. If you have questions, please do not hesitate to contact me directly at <a href="mailto:skeyser@medina-wa.gov">skeyser@medina-wa.gov</a> or 425.233.6416.

Sincerely,

Stephanie Keyser, AICP Planning Manager

# CITY OF MEDINA DECLARATION OF MAILING

Stephanie Keyser		oes declare as follows:
		he following described documents 300 feet of the property in
8417 Ne 12 <sup>th</sup> Street		
Description of document:		
NOA – Non-Admin Variance (	setback reduction	n)
A copy of the mailed item and hereto.	the addresses to	which it was mailed are attached
Signed under the penalties of   Medina, Washington this:	perjury of the law	rs of the state of Washington at
_16 <sup>th</sup> day of _	November	20 21
		Signature of mailing employee

p:/centralservices/forms/2008



# CITY OF MEDINA

501 EVERGREEN POINT ROAD | PO BOX 144 | MEDINA WA 98039-0144 TELEPHONE 425-233-6400 | www.medina-wa.gov

#### NOTICE OF APPLICATION

**Proposal:** Request for a non-administrative variance to reduce the rear yard setback from 30-

feet to 16-feet to accommodate an accessory structure.

**File No.** P-21-089 Non-Administrative Variance

**Applicant:** Chris Hall (agent)

Zijiang Yang (owner)

Site Address: 8417 NE 12th Street

Required Permits/Studies: Future Building Permit

Application Received: November 10, 2021
Determination of Completeness: November 12, 2021
Notice of Application: November 16, 2021

**PUBLIC COMMENTS:** Pursuant to MMC 16.80.110(B)(7), this application has a 14-day public comment period to receive written comments on this proposal. Comments must be submitted to Medina City Hall (via staff email below) by **4:00 pm, November 30, 2021.** 

**STATE ENVIRONMENTAL POLICY ACT:** The proposal is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e).

**DETERMINATION OF CONSISTENCY:** Pursuant to RCW 36.70B.040, a preliminary determination has found the proposal consistent with the provisions of the Medina Municipal Code.


**PUBLIC HEARING:** The Non-Administrative Variance will have a hearing before the Medina Hearing Examiner. **A SEPARATE MAILING** will be sent with the date and time of the hearing once the public comment period has expired.

**APPEAL RIGHTS:** A Type 3 Non-Administrative Variance may be appealed to the King County superior court pursuant to MMC 16.80.220(B) and 36.70C RCW.

**QUESTIONS:** Due to Covid-19 and temporary changes to City Hall, please <u>email</u> the staff contact below to review the complete application electronically, or if you have any questions.

**STAFF CONTACT:** Stephanie Keyser, AICP, Planning Manager, at (425) 233-6416 or <a href="mailto:skeyser@medina-wa.gov">skeyser@medina-wa.gov</a>

# Site Plan

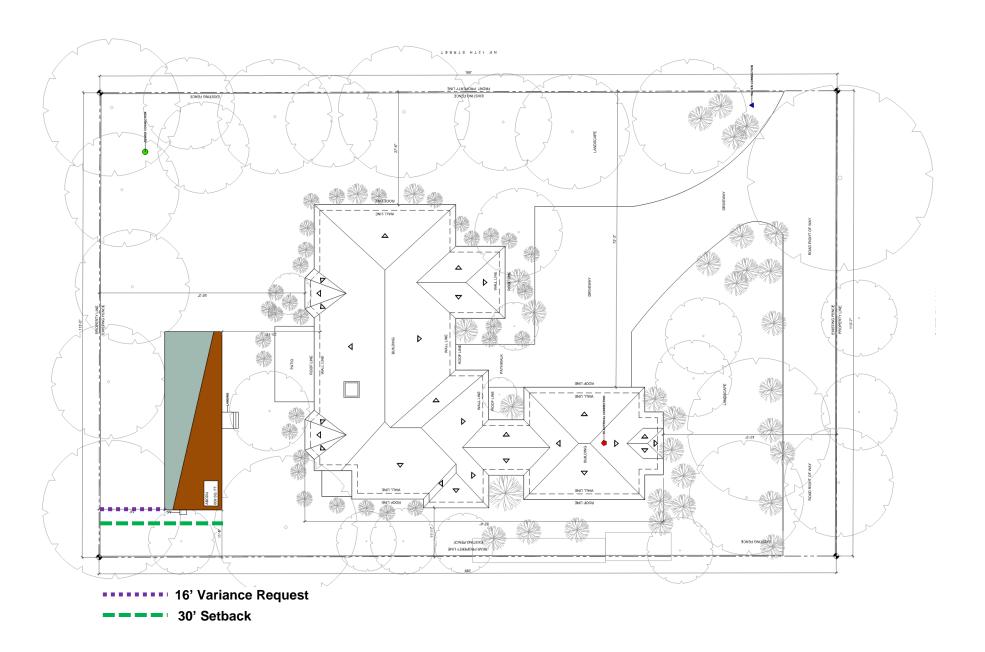



# **Data Management Services for Government and Business**

November 1, 2021

Chris Hall Abodu.com 2421 El Camino Real Redwood City CA 94062 8417 NE 12<sup>th</sup> St. Medina WA 98039

300-Ft Radius

Dear Mr. Hall:

Thank you for choosing **RADIUS MAPS** for your Public Notification Package. Your public Notification Documents are attached. Please look them over briefly to familiarize yourself with the contents of the package and distribute as follows:

- Please remove the "File Copies" from the file pocket in the back of the package and retain these for your own records, and;
- Submit the bound portion of the package, along with the mailing labels and any large format maps and other exhibits that may accompany the package to the city or government agency to satisfy their notification requirements.

Your complete satisfaction is my personal priority and I welcome your comments on your experience doing business with us. If you have any questions or require any clarifications, you can call me anytime at my cell number below.

Sincerely,

Megan Perkins



Offices in Southern California and Portland, Oregon 211 South State College Blvd. No. 515 Anaheim, California 92806





# Specialists in Certified Public Notification

With Offices Serving: California, Arizona, Oregon, and Washington



The state of the s



www.GoRadiusMaps.com Info@GoRadiusMaps.com



1.888.272.3487



1.888.815.9619

211 S. State College Blvd Anaheim CA, 92806



Data Management Services for Government and Business

# **Public Notification Study**

# & Ownership Listing

Prepared from public records maintained in the Office of The County Tax Assessor of KING County, California

For

8417 NE 12<sup>th</sup> St. Medina WA 98039

APN 2540 070

Prepared for:

Chris Hall Abodu.com 2421 El Camino Real Redwood City CA 94062

**November 1, 2021** 

**JN 21290** 



**Data Management Services for Government and Business** 

# CERTIFIED PROPERTY OWNERS' LIST AFFIDAVIT

I, <u>Megan Perkins</u>, hereby certify that the attached list contains the names and addresses of all persons to whom all property is assessed, as they appear on the latest available assessment roll of KING County within the area described and for a distance of Three (300) feet from the exterior boundaries of the property located at:


8417 NE 12<sup>th</sup> St. Medina WA 98039


APN 2540 070

I certify under penalty of perjury that the foregoing is true and correct.

Signed:

Megan Perkins November 1, 2021

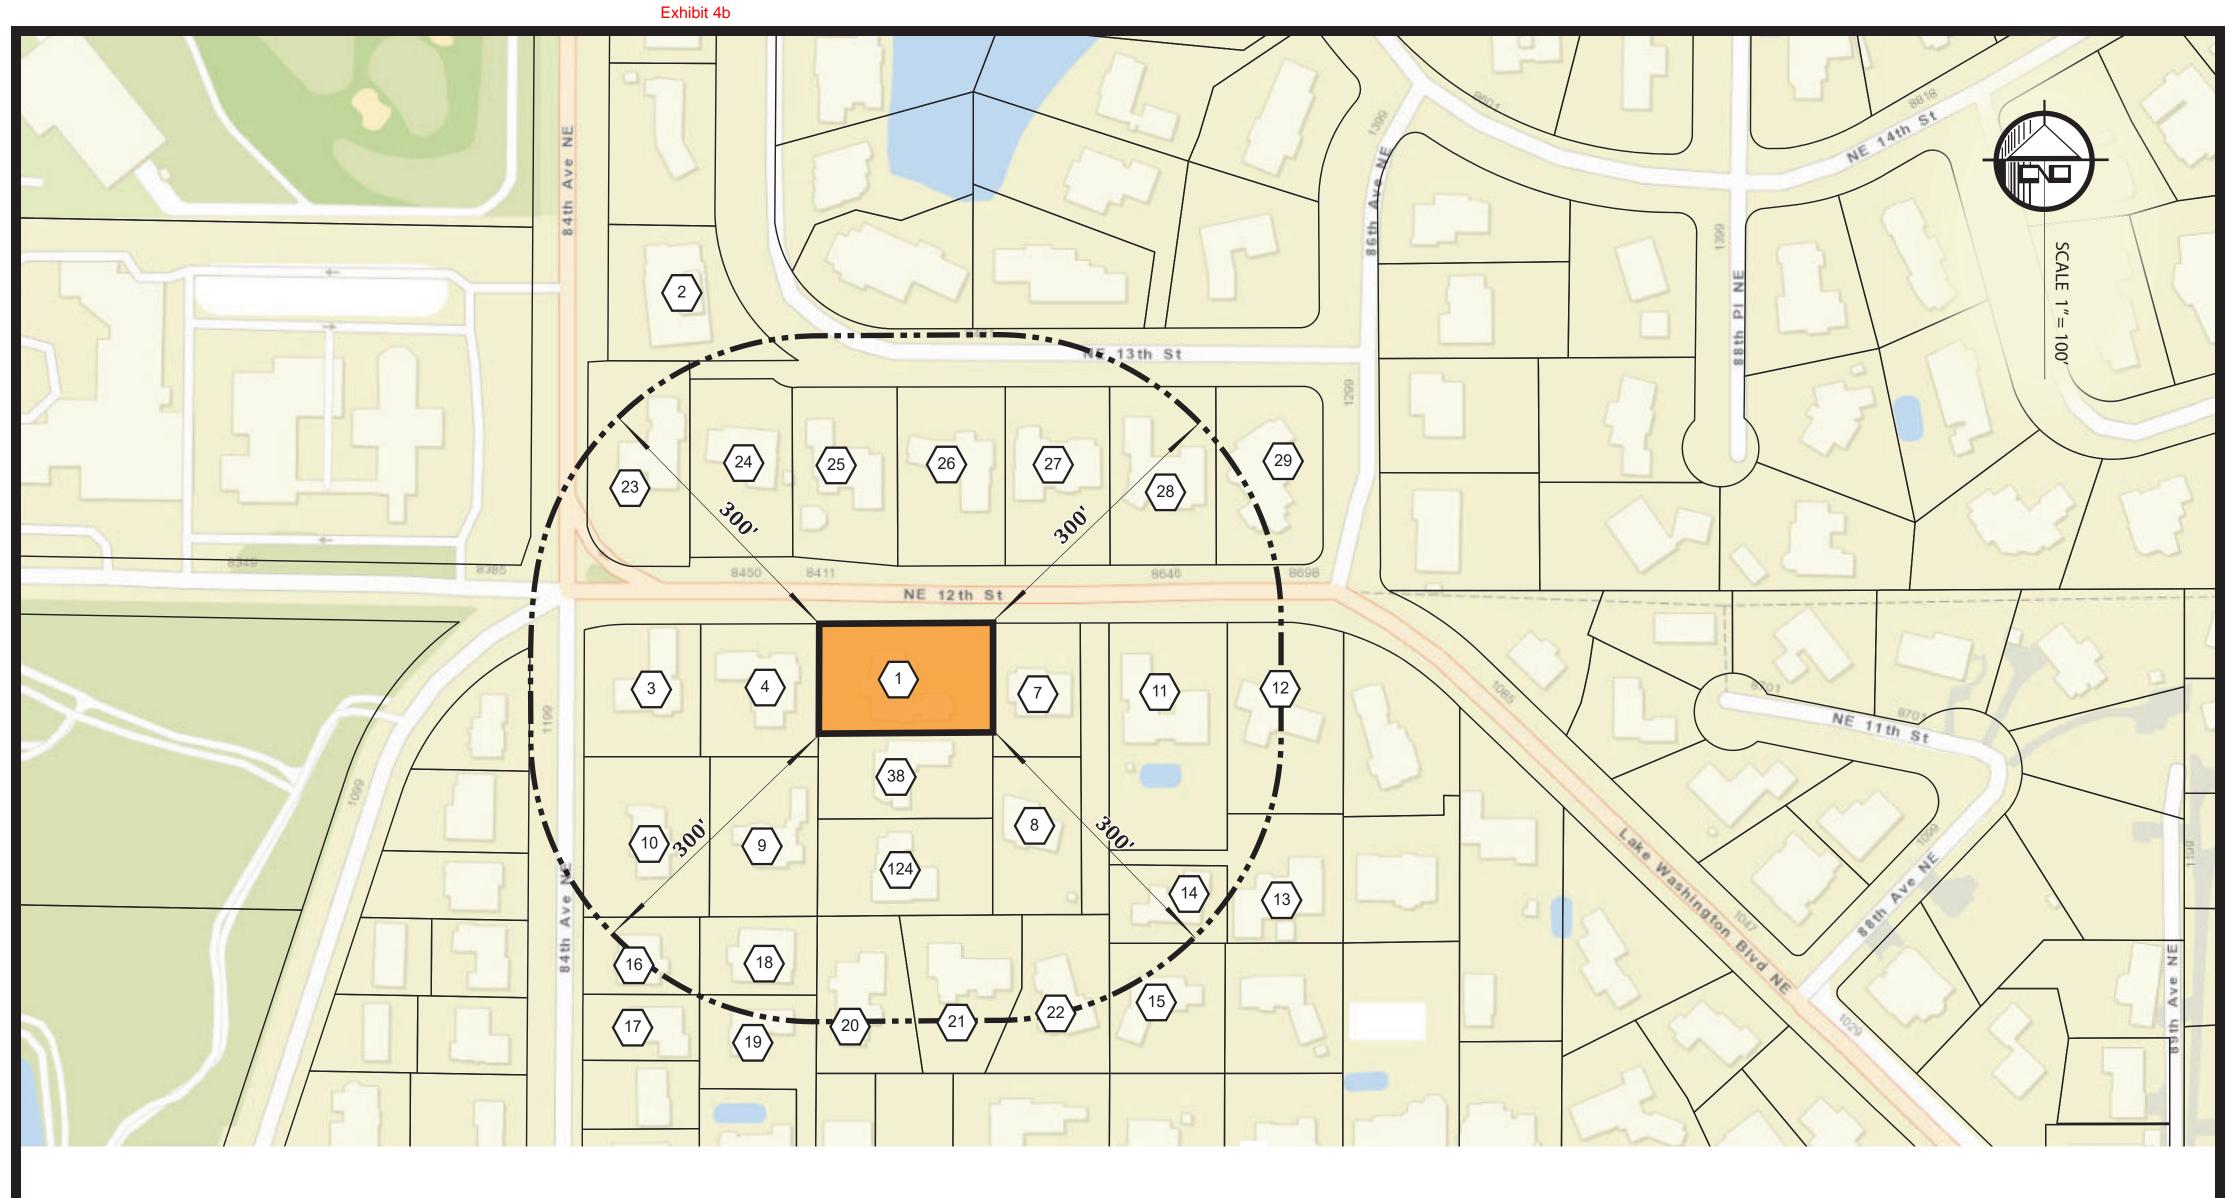

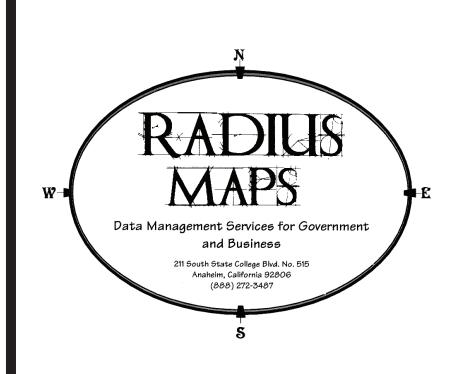

# MAP LEGEND

Indicates Map Key Number

# **Public Notification** Study

For

8417 N.E. 12th St.


Medina WA 98039

APN 2540 700 025

November 1, 2021

JN 21290

# Ownership Listing

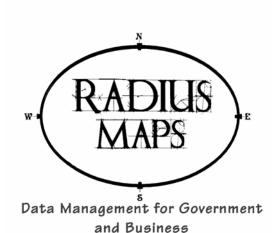

300' Radius Property Owners Study – 8417 NE 12th St., Medina, WA 98039	November 1, 2021	<b>1 Eag</b> eibit 4b
--	------------------	-----------------------

2540700025 SINAN & YANG ZIJIANG LI 8417 NE 12TH ST MEDINA WA 98039	1	1651800070 JAMES & DIANE KLINGER 1307 85TH AVE NE BELLEVUE WA 98004	2	2540700005 GARALD E & GAYLE A KIRK 10462 SE 19TH ST BELLEVUE WA 98004	3
2540700015 S THOMAS MAGNUSON 1036 84TH AVE NE MEDINA WA 98039	4	2540700026 TSAO FENG & CHIOU TZU WEI 8421 NE 12TH ST MEDINA WA 98039	5	2540700027 ALEKSANDR GRUSHKOVSKIY 500 106TH AVE NE #2603 BELLEVUE WA 98004	6
2540700039 ALIREZA R SABER 8445 NE 12TH ST MEDINA WA 98039	7	2540700040 UN IL & HYUN SOOK KIM 8449 NE 12TH ST MEDINA WA 98004	8	2540700075 SFT LLC 12208 96TH PL NE KIRKLAND WA 98034	9
2540700085 AVC-LT & EDGAR LEE & JULIE 1032 84TH AVE NE MEDINA WA 98039	10 ETTEE	2540700095 JOHN MICHAEL & KATHLE HIG 8601 NE 12TH ST MEDINA WA 98004	11 GGINS	2540700100 KEVIN MICHAEL & SARAH O'I 8615 NE 12TH ST MEDINA WA 98039	12 NEAL
2540700150 DONALD L & MOYA G SKILLN 8607 NE 12TH ST MEDINA WA 98039	13 1AN	2540700160 KEASEY JAMES BENNETT 8605 NE 12TH ST MEDINA WA 98039	14	2540700166 CHING-YUN CHANG 2018 156TH AVE NE #100 BELLEVUE WA 98007	15
2540700236 JEFFREY & MONICA BARNES 1024 84TH AVE NE BELLEVUE WA 98004	16	2540700237 ROBERT PHILIP & FERGUS CAF 1018 84TH AVE NE MEDINA WA 98039	17 RTER	2540700242 ZHONG XIN SU 1028 84TH AVE NE MEDINA WA 98039	18
2540700245 NAN & ZHONG LIN ZHANG 8422 NE 10TH ST MEDINA WA 98039	19	2540700255 MILES R ADAM 8424 NE 10TH ST MEDINA WA 98039	20	2540700256 PAUL SKOGLUND 8426 NE 10TH ST MEDINA WA 98039	21
2540700257 JAMES T & MONICA E WHAL 8428 NE 10TH ST MEDINA WA 98039	22 EY	3025059055 ERIC & HYEJIN LEE 8415 NE 13TH ST CLYDE HILL WA 98004	23	6448000010 RICK & SU SU BARNETT 7748 OVERLAKE DR W MEDINA WA 98039	24
6448000020 CHEN PENG & YANG RUIZHI 8501 NE 13TH ST CLYDE HILL WA 98004	25	6448000030 JI YANG 8531 NE 13TH ST CLYDE HILL WA 98004	26	6448000040 KAY M EDWARDS 8533 NE 13TH ST BELLEVUE WA 98004	27
6448000050 MICHELLE LORENZ 8545 NE 13TH ST CLYDE HILL WA 98004	28	6448000060 THOMAS & ELIZABETH MIDDL 1211 86TH AVE NE BELLEVUE WA 98004	29 .ETON		

# CITY OF MEDINA DECLARATION OF POSTING

MICHA	EL HOUY		does declare as follows:	
That s/he	is an employee of	the city of Medin	a and that on the:	
_	day of	November	20 21	
	ed a true and correted at each of the f	• • • • • • • • • • • • • • • • • • • •	f the following described documents d locations:	
MH	Medina City Hall,	501 Evergreen P	oint Road, Medina	
DY	City Website			
MH	Medina Post Offic	ce, 816 Evergreer	n Point Road, Medina	
mH	Public notice boa	rd at Medina Park	Northeast 12 <sup>th</sup> Street parking lot.	
mt	At two locations within 300 feet of the property in question described by its street address as follows:			
8417 NE	12 <sup>th</sup> Street			
	on of document: 9 (NOA – Yang)			
Signed ur	the posted item is nder the penalties Vashington this:		aws of the state of Washington at	
	lbl day of	November	20 21	
			Michael Helly	
			Signature of posting employee	



# CITY OF MEDINA NOTICE OF APPLICATION

Proposal: Request for a non-administrative variance to reduce the rear yard setback from 30-feet to 16-feet to accommodate an

accessory structure.

File No. P-21-089 Non-Administrative Variance

Applicant: Chris Hall (agent)
Zijiang Yang (owner)

Site Address: 8417 NE 12th Street

Required Permits/Studies: Future Building Permit

Application Received: November 10, 2021
Determination of Completeness: November 12, 2021
Notice of Application: November 16, 2021

PUBLIC COMMENTS: Pursuant to MMC 16.80.110(B)(7), this application has a 14-day public comment period to receive written comments on the proposal. Persons wishing to provide written comments must submit them by 4:00 pm on November 30, 2021, to Medina City Hall via the staff email below.

PUBLIC HEARING: This application will have a hearing before the Medina Hearing Examiner. A separate notice will occur with the date and time of the hearing once the public comment period has expired.

STATE ENVIRONMENTAL POLICY ACT: The proposal is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e)


**DETERMINATION OF CONSISTENCY:** Pursuant to RCW 36.70B.040, a preliminary determination has found the proposal consistent with the provisions of the Medina Municipal Code.

APPEAL RIGHTS: Type 3 decisions made by the Medina Hearing Examiner may be appealed to King County superior court pursuant to MMC 20.80.220(B) and 36.70C RCW.

QUESTIONS: Due to Covid-19 and temporary changes to City Hall, please email the staff contact below to review the complete application electronically, or if you have questions.

STAFF CONTACT: Stephanie Keyser, AICP, Planning Manager, at (425) 233-6416 or <a href="mailto:skeyser@medina-wa.gov">skeyser@medina-wa.gov</a>

Below: Site Plan

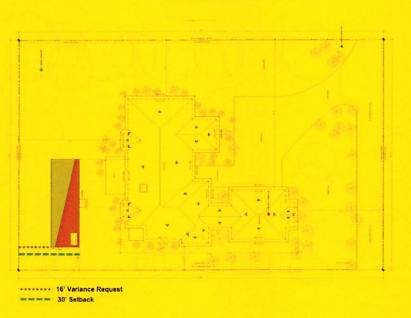

Stephanie Keyser, AICP, Planning Manager

11/16/2021 Notice Issued

WARNING!

# CITY OF MEDINA DECLARATION OF MAILING

Stephanie Keyser			does declare as follows:
the 15 <sup>th</sup> day of December 2021 s/he caused a true and correct legible copy of the following described docume to be mailed to all residences which are within 300 feet of the property in question described by its street address as follows:		the following described documents a 300 feet of the property in	
8417 NE 12 <sup>th</sup>	Street		
Description of	f document:		
NOH – Non-A	Admin Variance	(setback reducti	on)
A copy of the hereto.	mailed item and	I the addresses	to which it was mailed are attached
Signed under Medina, Was	-	perjury of the la	ws of the state of Washington at
_15 <sup>t</sup>	h day of	December	20 21
			to h
			Signature of mailing employee



# CITY OF MEDINA NOTICE OF VIRTUAL HEARING

**NOTICE IS HEREBY GIVEN** that the Medina Hearing Examiner will conduct a virtual public hearing on **Thursday**, **January 13**, **2022**, **at 10:00 AM** or as called as soon thereafter via Zoom. The purpose of this hearing is to consider testimony for and against the following:

Proposal: Request for a non-administrative variance to reduce the rear yard setback from 30-

feet to 16-feet to accommodate an accessory structure

**File No.** Non-administrative Variance (P-21-089)

**Applicant:** Chris Hall (agent)

Zijiang Yang (owner)

Site Address: 8417 NE 12<sup>th</sup> Street

YOU ARE INVITED to attend the remote hearing and make oral and written comments. The Hearing Examiner has the discretion to limit testimony to relevant, non-repetitive comments and to set time limits. If you are unable to attend, written comments, photographs, or other exhibits on the application may be submitted to the staff contact or address below before the hearing date. The Hearing Examiner gives equal weight to testimony submitted in person at a hearing and written comments that are submitted.

For information on how to participate in the remote hearing, please see the City's website for the hearing agenda which will be posted by Friday, January 7, 2022, at 4:00 PM. Please either log in or phone in at the beginning of the hearing to participate. If you need special accommodations, please contact the staff below.

**STATE ENVIRONMENTAL POLICY ACT:** The proposal is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e).

**APPEAL RIGHTS:** Appeal of the Non-administrative Variance is to King County Superior Court pursuant to MMC 16.80.220(B).

**QUESTIONS:** The complete application may be reviewed at City Hall. Requests for information and/or written comments may be directed to the staff contact below, or to Medina City Hall, Attn: Development Services, 501 Evergreen Point Road, Medina, WA 98039.

**STAFF CONTACT:** Stephanie Keyser, AICP, Planning Manager, at (425) 233-6416 or skeyser@medina-wa.gov.

Stephanie Keyser, AICP, Planning Manager

12/15/2021 Notice Issued



# **Data Management Services for Government and Business**

November 1, 2021

Chris Hall Abodu.com 2421 El Camino Real Redwood City CA 94062 8417 NE 12<sup>th</sup> St. Medina WA 98039

300-Ft Radius

Dear Mr. Hall:

Thank you for choosing **RADIUS MAPS** for your Public Notification Package. Your public Notification Documents are attached. Please look them over briefly to familiarize yourself with the contents of the package and distribute as follows:

- Please remove the "File Copies" from the file pocket in the back of the package and retain these for your own records, and;
- Submit the bound portion of the package, along with the mailing labels and any large format maps and other exhibits that may accompany the package to the city or government agency to satisfy their notification requirements.

Your complete satisfaction is my personal priority and I welcome your comments on your experience doing business with us. If you have any questions or require any clarifications, you can call me anytime at my cell number below.

Sincerely,

Megan Perkins



Offices in Southern California and Portland, Oregon 211 South State College Blvd. No. 515 Anaheim, California 92806





# Specialists in Certified Public Notification

With Offices Serving: California, Arizona, Oregon, and Washington





www.GoRadiusMaps.com Info@GoRadiusMaps.com



1.888.272.3487



1.888.815.9619

211 S. State College Blvd Anaheim CA, 92806



**Data Management Services for Government and Business** 

# **Public Notification Study**

# & Ownership Listing

Prepared from public records maintained in the Office of The County Tax Assessor of KING County, California

For

8417 NE 12<sup>th</sup> St. Medina WA 98039

APN 2540 070

Prepared for:

Chris Hall Abodu.com 2421 El Camino Real Redwood City CA 94062

**November 1, 2021** 

**JN 21290** 



**Data Management Services for Government and Business** 

### CERTIFIED PROPERTY OWNERS' LIST AFFIDAVIT

I, <u>Megan Perkins</u>, hereby certify that the attached list contains the names and addresses of all persons to whom all property is assessed, as they appear on the latest available assessment roll of KING County within the area described and for a distance of Three (300) feet from the exterior boundaries of the property located at:


8417 NE 12<sup>th</sup> St. Medina WA 98039


APN 2540 070

I certify under penalty of perjury that the foregoing is true and correct.

Signed:

Megan Perkins November 1, 2021

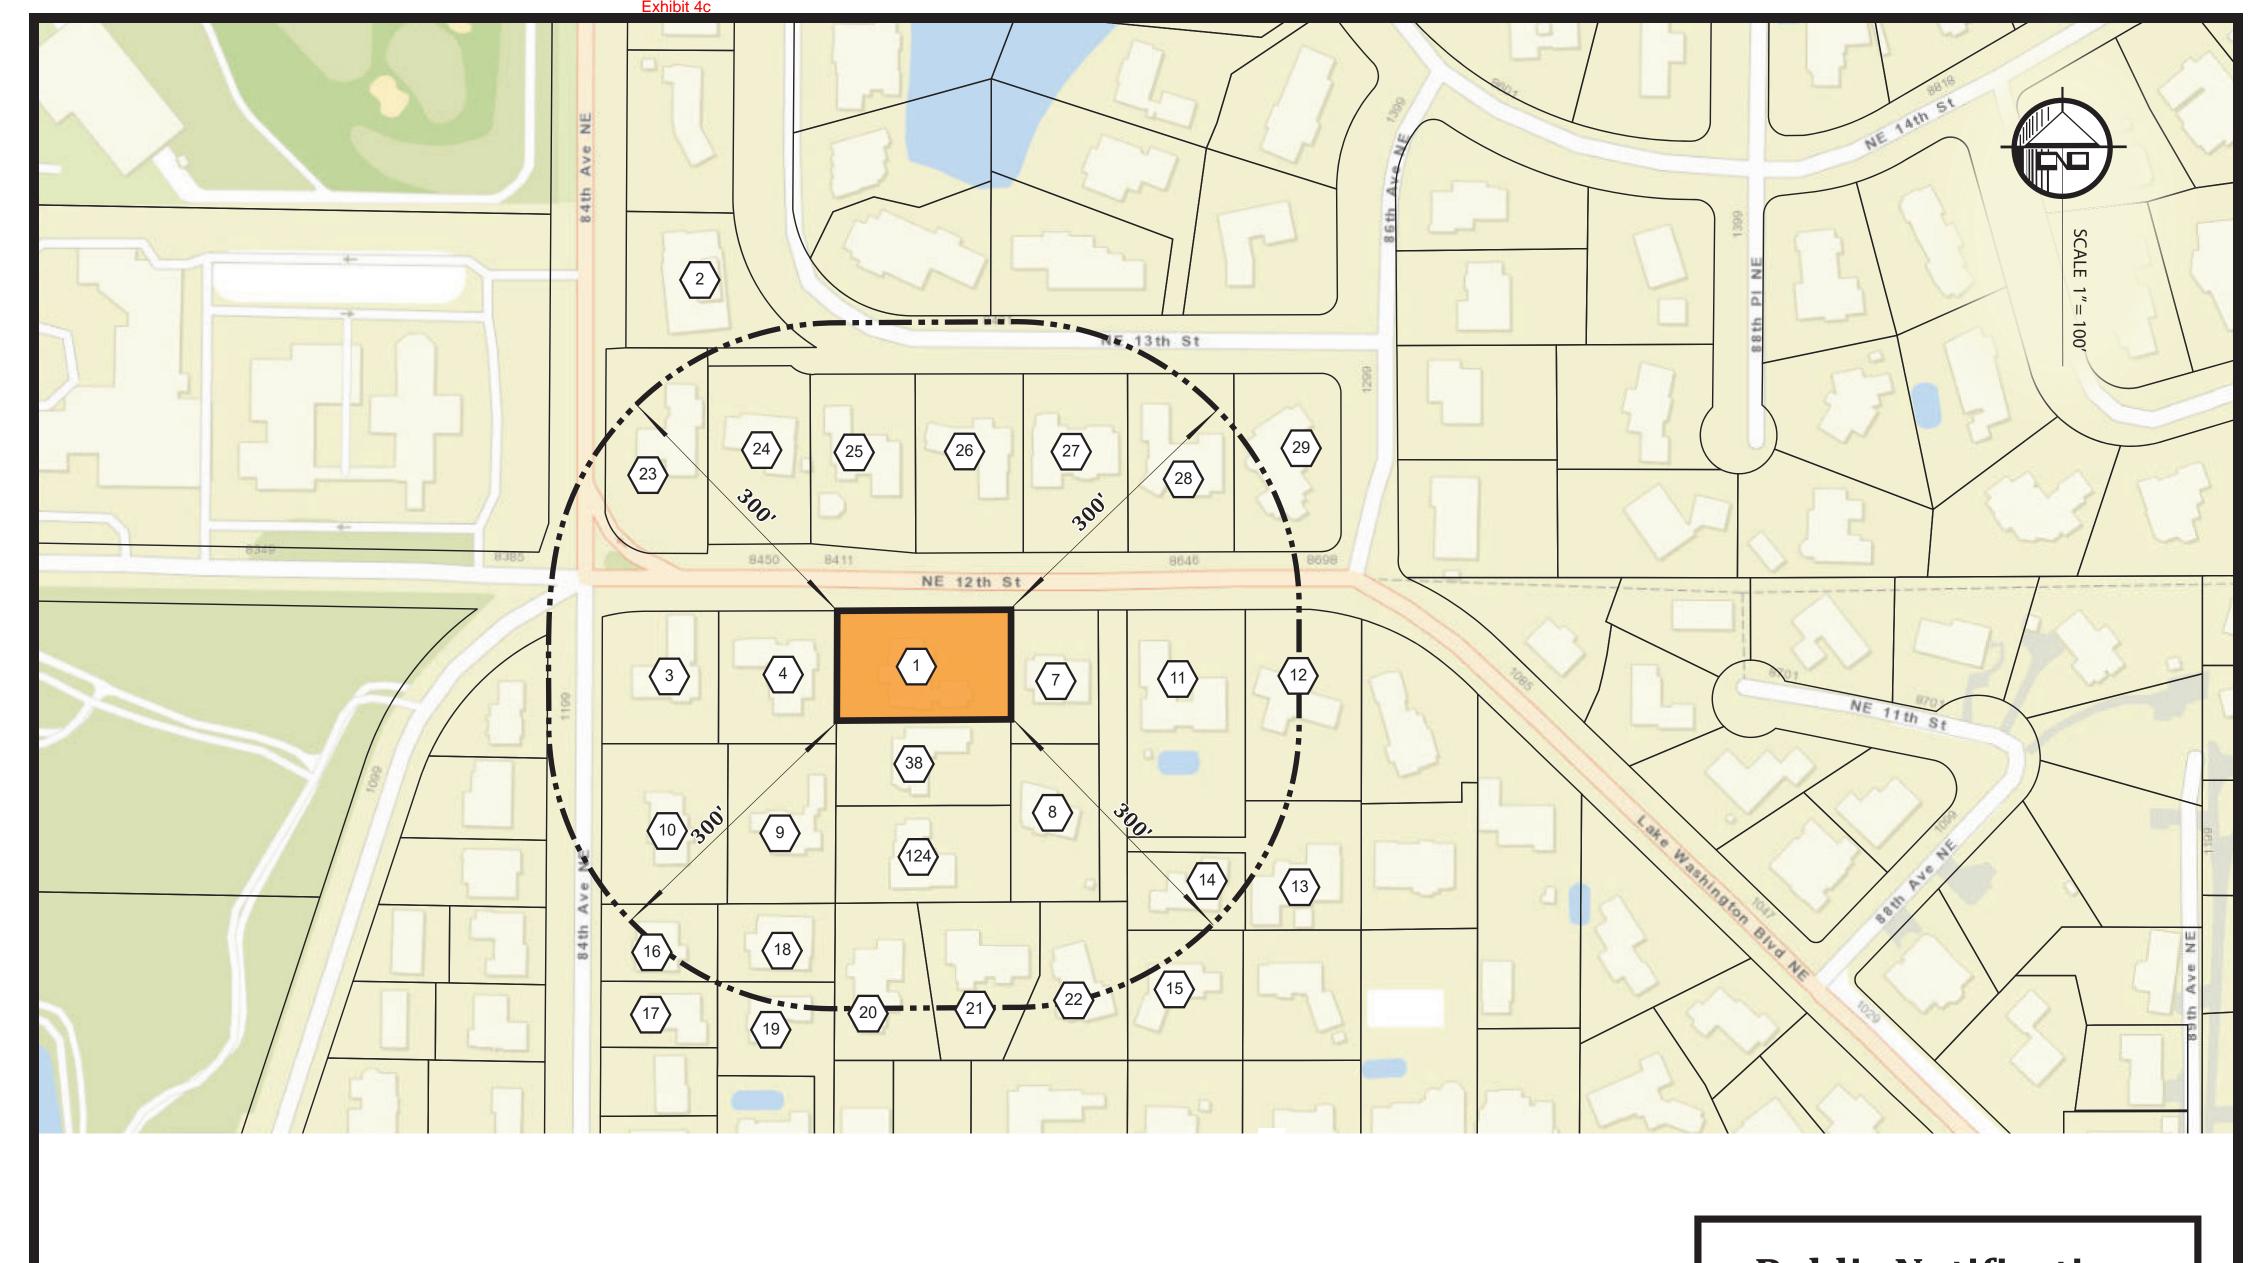

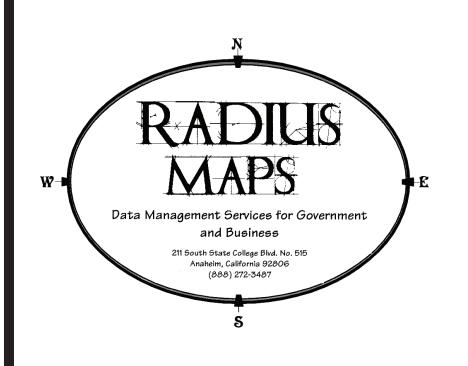

### MAP LEGEND

Indicates Map Key Number

# Public Notification Study

For

8417 N.E. 12th St.

Medina WA 98039

APN 2540 700 025

November 1, 2021

JN 21290

# Ownership Listing



## 300' Radius Property Owners Study – 8417 NE 12<sup>th</sup> St., Medina, WA 98039 November 1, 2021 1 Page Exhibit 4C

2540700025 SINAN & YANG ZIJIANG LI 8417 NE 12TH ST MEDINA WA 98039	1	1651800070 JAMES & DIANE KLINGER 1307 85TH AVE NE BELLEVUE WA 98004	2	2540700005 GARALD E & GAYLE A KIRK 10462 SE 19TH ST BELLEVUE WA 98004	3
2540700015 S THOMAS MAGNUSON 1036 84TH AVE NE MEDINA WA 98039	4	2540700026 TSAO FENG & CHIOU TZU WE 8421 NE 12TH ST MEDINA WA 98039	5 I	2540700027 ALEKSANDR GRUSHKOVSKIY 500 106TH AVE NE #2603 BELLEVUE WA 98004	6
2540700039 ALIREZA R SABER 8445 NE 12TH ST MEDINA WA 98039	7	2540700040 UN IL & HYUN SOOK KIM 8449 NE 12TH ST MEDINA WA 98004	8	2540700075 SFT LLC 12208 96TH PL NE KIRKLAND WA 98034	9
2540700085 AVC-LT & EDGAR LEE & JULIE 1032 84TH AVE NE MEDINA WA 98039	10 ETTEE	2540700095 JOHN MICHAEL & KATHLE HIG 8601 NE 12TH ST MEDINA WA 98004	11 GGINS	2540700100 KEVIN MICHAEL & SARAH O'N 8615 NE 12TH ST MEDINA WA 98039	12 NEAL
2540700150 DONALD L & MOYA G SKILLN 8607 NE 12TH ST MEDINA WA 98039	13 1AN	2540700160 KEASEY JAMES BENNETT 8605 NE 12TH ST MEDINA WA 98039	14	2540700166 CHING-YUN CHANG 2018 156TH AVE NE #100 BELLEVUE WA 98007	15
2540700236 JEFFREY & MONICA BARNES 1024 84TH AVE NE BELLEVUE WA 98004	16	2540700237 ROBERT PHILIP & FERGUS CAF 1018 84TH AVE NE MEDINA WA 98039	17 RTER	2540700242 ZHONG XIN SU 1028 84TH AVE NE MEDINA WA 98039	18
2540700245 NAN & ZHONG LIN ZHANG 8422 NE 10TH ST MEDINA WA 98039	19	2540700255 MILES R ADAM 8424 NE 10TH ST MEDINA WA 98039	20	2540700256 PAUL SKOGLUND 8426 NE 10TH ST MEDINA WA 98039	21
2540700257 JAMES T & MONICA E WHAL 8428 NE 10TH ST MEDINA WA 98039	22 EY	3025059055 ERIC & HYEJIN LEE 8415 NE 13TH ST CLYDE HILL WA 98004	23	6448000010 RICK & SU SU BARNETT 7748 OVERLAKE DR W MEDINA WA 98039	24
6448000020 CHEN PENG & YANG RUIZHI 8501 NE 13TH ST CLYDE HILL WA 98004	25	6448000030 JI YANG 8531 NE 13TH ST CLYDE HILL WA 98004	26	6448000040 KAY M EDWARDS 8533 NE 13TH ST BELLEVUE WA 98004	27
6448000050 MICHELLE LORENZ 8545 NE 13TH ST CLYDE HILL WA 98004	28	6448000060 THOMAS & ELIZABETH MIDDL 1211 86TH AVE NE BELLEVUE WA 98004	29 ETON		_

# CITY OF MEDINA DECLARATION OF POSTING

MICH	AER HOLLY		does declare as follows:
That s/he	• •	· · · ·	na and that on the:
_	」5弾 day of	DECOMBER	20 21
	eed a true and correted at each of the		of the following described documents ed locations:
MH	Medina City Hall,	501 Evergreen	Point Road, Medina
DN	City Website		
MH	Medina Post Offic	e, 816 Evergree	en Point Road, Medina
MH	Public notice boa	rd at Medina Pa	rk Northeast 12 <sup>th</sup> Street parking lot.
MH	At two locations v		the property in question described
8417 NE	12 <sup>th</sup> Street		
Description	on of document:		
P-21-08	9 (NOH – Yang – I	Non-Admin Varia	ance)
A copy of	the posted item is	attached hereto	) <b>.</b>
_	nder the penalties  Washington this:	of perjury of the	laws of the state of Washington at
		Decombor	20 21
			Signature of posting employee



# CITY OF MEDINA NOTICE OF VIRTUAL HEARING

**NOTICE IS HEREBY GIVEN** that the Medina Hearing Examiner will conduct a virtual public hearing on **Thursday**, **January 13**, **2022**, **at 10:00 AM** or as called as soon thereafter via Zoom. The purpose of this hearing is to consider testimony for and against the following:

Proposal: Request for a non-administrative variance to reduce the rear yard setback from 30-

feet to 16-feet to accommodate an accessory structure

File No. Non-administrative Variance (P-21-089)

Applicant: Chris Hall (agent)

Zijiang Yang (owner)

Site Address: 8417 NE 12th Street

YOU ARE INVITED to attend the remote hearing and make oral and written comments. The Hearing Examiner has the discretion to limit testimony to relevant, non-repetitive comments and to set time limits. If you are unable to attend, written comments, photographs, or other exhibits on the application may be submitted to the staff contact or address below before the hearing date. The Hearing Examiner gives equal weight to testimony submitted in person at a hearing and written comments that are submitted.

For information on how to participate in the remote hearing, please see the City's website for the hearing agenda which will be posted by Friday, January 7, 2022, at 4:00 PM. Please either log in or phone in at the beginning of the hearing to participate. If you need special accommodations, please contact the staff below.

**STATE ENVIRONMENTAL POLICY ACT:** The proposal is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e).

**APPEAL RIGHTS:** Appeal of the Non-administrative Variance is to King County Superior Court pursuant to MMC 16.80.220(B).

**QUESTIONS:** The complete application may be reviewed at City Hall. Requests for information and/or written comments may be directed to the staff contact below, or to Medina City Hall, Attn: Development Services, 501 Evergreen Point Road, Medina, WA 98039.

**STAFF CONTACT:** Stephanie Keyser, AICP, Planning Manager, at (425) 233-6416 or skeyser@medina-wa.gov.

Stephanie Keyser, AICP, Planning Manager

12/15/2021 Notice Issued

### **Stephanie Keyser**

From: Legals < legals@seattletimes.com>
Sent: Monday, December 13, 2021 10:11 AM

**To:** Stephanie Keyser

**Subject:** RE: 18482 - Legal Ad - City of Medina

Hi Stephanie,

This notice is scheduled to publish on 12/15, the total is \$160.56.

Thank you!

44

1

### CITY OF MEDINA NOTICE OF PUBLIC HEARING

NOTICE IS HEREBY GIVEN that the Medina Hearing Examiner will conduct a remote public hearing on Thursday, January 13, 2022, at 10:00 AM. The purpose of this hearing is to consider public testimony for and against the following:

Proposal: Request for a non-administrative variance to reduce the rear yard setback from 30-feet to 16-feet to accommodate an accessory structure

File No: Non-Administrative Variance (P-21-089)

Applicant: Chris Hall (agent) Zijiang Yang (owner)

Address: 8417 NE 12th Street

YOU ARE INVITED to attend the remote hearing and make oral and written comments. The Hearing Examiner has the discretion to limit testimony to relevant, non-repetitive comments and to set time limits. If you are unable to attend, written comments, photographs, or other exhibits on the application may be submitted to the staff contact or address below before the hearing date. The Hearing Examiner gives equal weight to testimony submitted in person at a hearing and written comments that are submitted.

For information on how to participate in the remote hearing, please see the City's website for the hearing agenda which will be posted by Friday, January 7, 2022, at 4:00 PM. Please either log in or phone in at the beginning of the hearing to participate. If you need special accommodations, please contact the staff below.

STATE ENVIRONMENTAL POLICY ACT (SEPA): This project is exempt from environmental (SEPA) review pursuant to WAC 197-11-800(6)(e)

APPEAL RIGHTS: Appeal of the Nonadministrative Variance is to King County Superior Court pursuant to MMC 16.80.220(B).

QUESTIONS: City Hall currently remains closed to the public. However, the complete application may be reviewed by emailing the staff contact below. Requests for information and/or written comments may be directed to Medina City Hall, Attn: Development Services, 501 Evergreen Point Road, Medina, WA 98039.

STAFF CONTACT: Stephanie Keyser, AICP, Planning Manager, at (425) 233-6416 or skeyser@medina-wa.gov

### Holly Botts (she/her)

Legal Advertising Representative

p: (206) 652-6604

e: hbotts@seattletimes.com



From: Stephanie Keyser < skeyser@medina-wa.gov>

Sent: Monday, December 13, 2021 6:25 AM
To: Legals < legals@seattletimes.com>
Subject: 18482 - Legal Ad - City of Medina

Good Morning,

Attached please find a legal ad for publication on Wednesday, December 15<sup>th</sup>.

Thanks! Stephanie

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.



# NON-ADMINISTRATIVE VARIANCE CHECKLIST

501 EVERGREEN POINT ROAD MEDINA, WA 98039 PHONE: 425-233-6414/6400

This checklist contains the minimum submission requirements for a non-administrative variance that are due at the time of submittal. Please note that not all items listed may apply to your submittal.

COMPLETE APPLICATION							
Variance Checklist							
Complete Variance Application:  Application form Signature of applicant/agent All questions answered in full							
Declaration of Agency form							
Proof of Ownership (copy of deed)							
Site Plan with required information							
Building plans, elevations, and/or sections with area of variance highlighted							
Documentation of Original Grade (if applicable)							
State Environmental Policy Act (SEPA) Checklist for non-residential uses (if applicable)							
<ul> <li>Mailing labels – Word doc formatted to Avery address labels</li> <li>Mailing labels containing the names of property owners and their mailing addresses for all properties within 300 feet or three (3) parcels depth, whichever distance is greater but not to exceed 1,000 feet.</li> <li>Vicinity map showing the site with the 300' or three (3) parcels depth minimum buffer of property owners who will be notified of the application.</li> </ul>							
Perspective drawings, renderings, studies or additional supporting information (if applicable)							



### **NON-ADMINISTRATIVE** VARIANCE **APPLICATION**

**EVERGREEN POINT ROAD MEDINA, WA 98039** 

PHONE: 425-233-6414/6400			
Complete this form for the following:  • Relief from dimensional zoning standards and			
<ul> <li>The relief is not eligible for an administrative variar</li> </ul>	nce or minor deviation		
General I	Information		
Owner Name: Zijiang Yang			
Property Address: 8417 NE 12th Street, Medina, WA			
Legal Description: FINLEYS GARDEN TRS LOT A-1 TGW N 10 FT OF LOT A-2 OF MEDINA SP #83-1 REC #8301240694 SD SP DAF LOTS 5-6-7 & 12-13-14 BLK 1 & POR VAC ST ADJ AKA LOT R 1 OF MEDINA LLA #83-9 REC #8310050800 PLat Block: 1 Plat Lot: 5-7&12 TO 14	Tax Parcel Number: 254070-0025		
Agent / Prii	nary contact		
Name: Chris Hall	Email: chris@abodu.com		
Contact Phone: 408-410-7638	Alternative Phone:		
Mailing Address: 2424 El Camino Real	City: Redwood City State: CA Zip: 94063		
Lot Size: 20,430 SQ FT.	Information Critical area(s) located on the property (Ch. 20.50 MMC)?  YES NO		
Zoning District:			
X R-16	SR-30 Public NA (Neighborhood Auto)		
Check all boxes for which relief is requested:  ☐ Maximum height ☐ Maximum structural coverage ☐ Maximum impervious surface coverage			
Please clearly state what your variance request is (i.e. <i>This is a reque</i> We are requesting a reduction in the rear setback			
List known variances or special/conditional use permits previously a	pproved for this property:		
Please describe any known nonconforming conditions:			
Please provide a complete description of the proposed project (attac	h additional pages if necessary):		
Washington State Department of Labor and Industrinstalled on Concrete t-footing foundation, and confidence in the control of t	ccessory structure that is approved and inspected by the ries. The structure is to be fully completed in Factory, nected to site utilities. The structure will be used as a pting to the demands of both working and living at hon		

48

### **Approval Criteria**

The following is the approval criteria for a non-administrative variance. Please respond to each item by providing as much detailed information as possible to support your request. Attach additional pages if necessary.

1. The variance does not constitute a granting of special privilege inconsistent with the limitations upon uses of other properties in the vicinity and zone in which the subject property is located

The variance does not grant special privileges inconsistent with uses of other properties located in the vicinity of 8417 NE 12th Street. Using basic aerial imagery provided by Google satellite view, our findings reveal several homes within the neighborhood with accessory structures. Within a half mile radius there are pool houses, sheds, and detached garages that are within 10' of property lines.

We understand some of these may have been grandfathered into the code. But, given their existence, our request is not a special condition using the existing neighborhood's form and function as a benchmark for comparison. Some examples you'll find of other accessory structures are located on NE 12th, 88th place, 86th ave, NE 9th, etc.

2. The variance is necessary, because of special circumstances relating to the size, shape, topography, location or surroundings of the subject property, to provide it with use rights and privileges permitted to other properties in the vicinity and in the zone in which the subject property is located

The variance is necessary because of special circumstances relating to the location of the property. There is a 14' wide private lane that is a right of way for accessing properties located off of NE 12th Street. This acts as a direct reduction in the availability of buildable space at the front of the property, subsequently resulting in the loss of rear yard space, due to the placement of the primary home being pushed back towards the rear property line.

With the accessory structure placed at 16' from the rear property line, there is minimal to no impact on existing mature trees, landscaping, and pre existing patio and deck structure's. If we move the accessory structure to comply with the 30' rear setback, two mature trees will need to be removed. Also, patio and deck demolition will have to occur to provide separation between the primary home and the accessory structure. Moving the accessory structure closer would result in higher cost implications for our family, due to the time and labor necessary for demolition and landscaping. This would also increase the construction timeline and noise impacts experienced by the neighborhood.

3. The variance is necessary to relieve a material hardship that cannot be relieved by any other means such that the material hardship must relate to the land itself and not to problems personal to the applicant


The variance is necessary to relieve hardship that cannot be relieved by any other means, as it relates to the land itself. Placing the accessory structure at the 30' setback would result in the removal of two mature trees and construction and demolition of existing landscaping and patio.


In addition, the proposed placement would have the least impact on the existing conditions of the property. If the accessory structure was required to be 30' from the rear property line, that would place it closer to the existing home with only 7'8" between the structure and the bay window. This would likely mean that the structure is more visible from the private lane. To maintain and support Medina's interest in preserving the character of its neighborhoods, our proposed placement would result in no public viewing of the accessory structure. The property is surrounded by trees and shrubbery ranging from 10-25' in height. The accessory structure meets all other requirements of the Medina zoning code, including but not limited to, height, yard coverage, impervious surface area, and floor area ratio.


Approval Criteria (continued) 4. The granting of such variance will not be materially detrimental to the public welfare or injurious to the property or improvements in the vicinity and zone in which the subject property is situated The granting of such variance will not be materially detrimental to the public welfare of the surrounding vicinity. Placing our prefabricated L&I approved structure, results in a drastic reduction in environmental impacts to the surrounding properties. Our on-site construction is completed in less than three weeks. A site built structure of comparable size would require six months of ongoing construction. Resulting in noise pollution, material waste, air quality impacts, and frustrated community members. The 16' rear setback allows for the preservation of on-site landscaping and mature trees to remain. Both of these elements add value to the neighborhood by providing privacy, and ecological vibrancy. 5. The variance is the minimum necessary to provide reasonable relief The variance is the minimum necessary to provide reasonable relief to our family and Medina community members. This is the least restrictive variance that can be given. We are not requesting an additional size increase, height increase, conditional use change, or the removal of protected trees. The structure meets FAR, height, yard coverage, impervious surface area, and use. Our structure is 609 SQ FT, making it less than 22% of the total square footage of the gross floor area of the single-family dwelling. This is 18% less than the requirement outlined in Medina's code 20.34.020-2. Relief is needed as our family adjusts to the demands of working and living out of the same space. The pandemic has redefined our nation's work patterns. The accessory structure allows our family to properly adjust and thrive in Medina. I certify under the penalty of perjury that I am the owner of the above property or the duly authorized agent of the owner(s) acting on behalf of the owner(s) and that all information furnished in support of this application is true and correct. Signature Christopher Hall Owner □ Agent ☑ Date 11/3/2021


Signature\_\_\_\_\_Owner □ Agent □ Date\_\_\_\_\_

Page **3** of **3** Rev. 02/2021

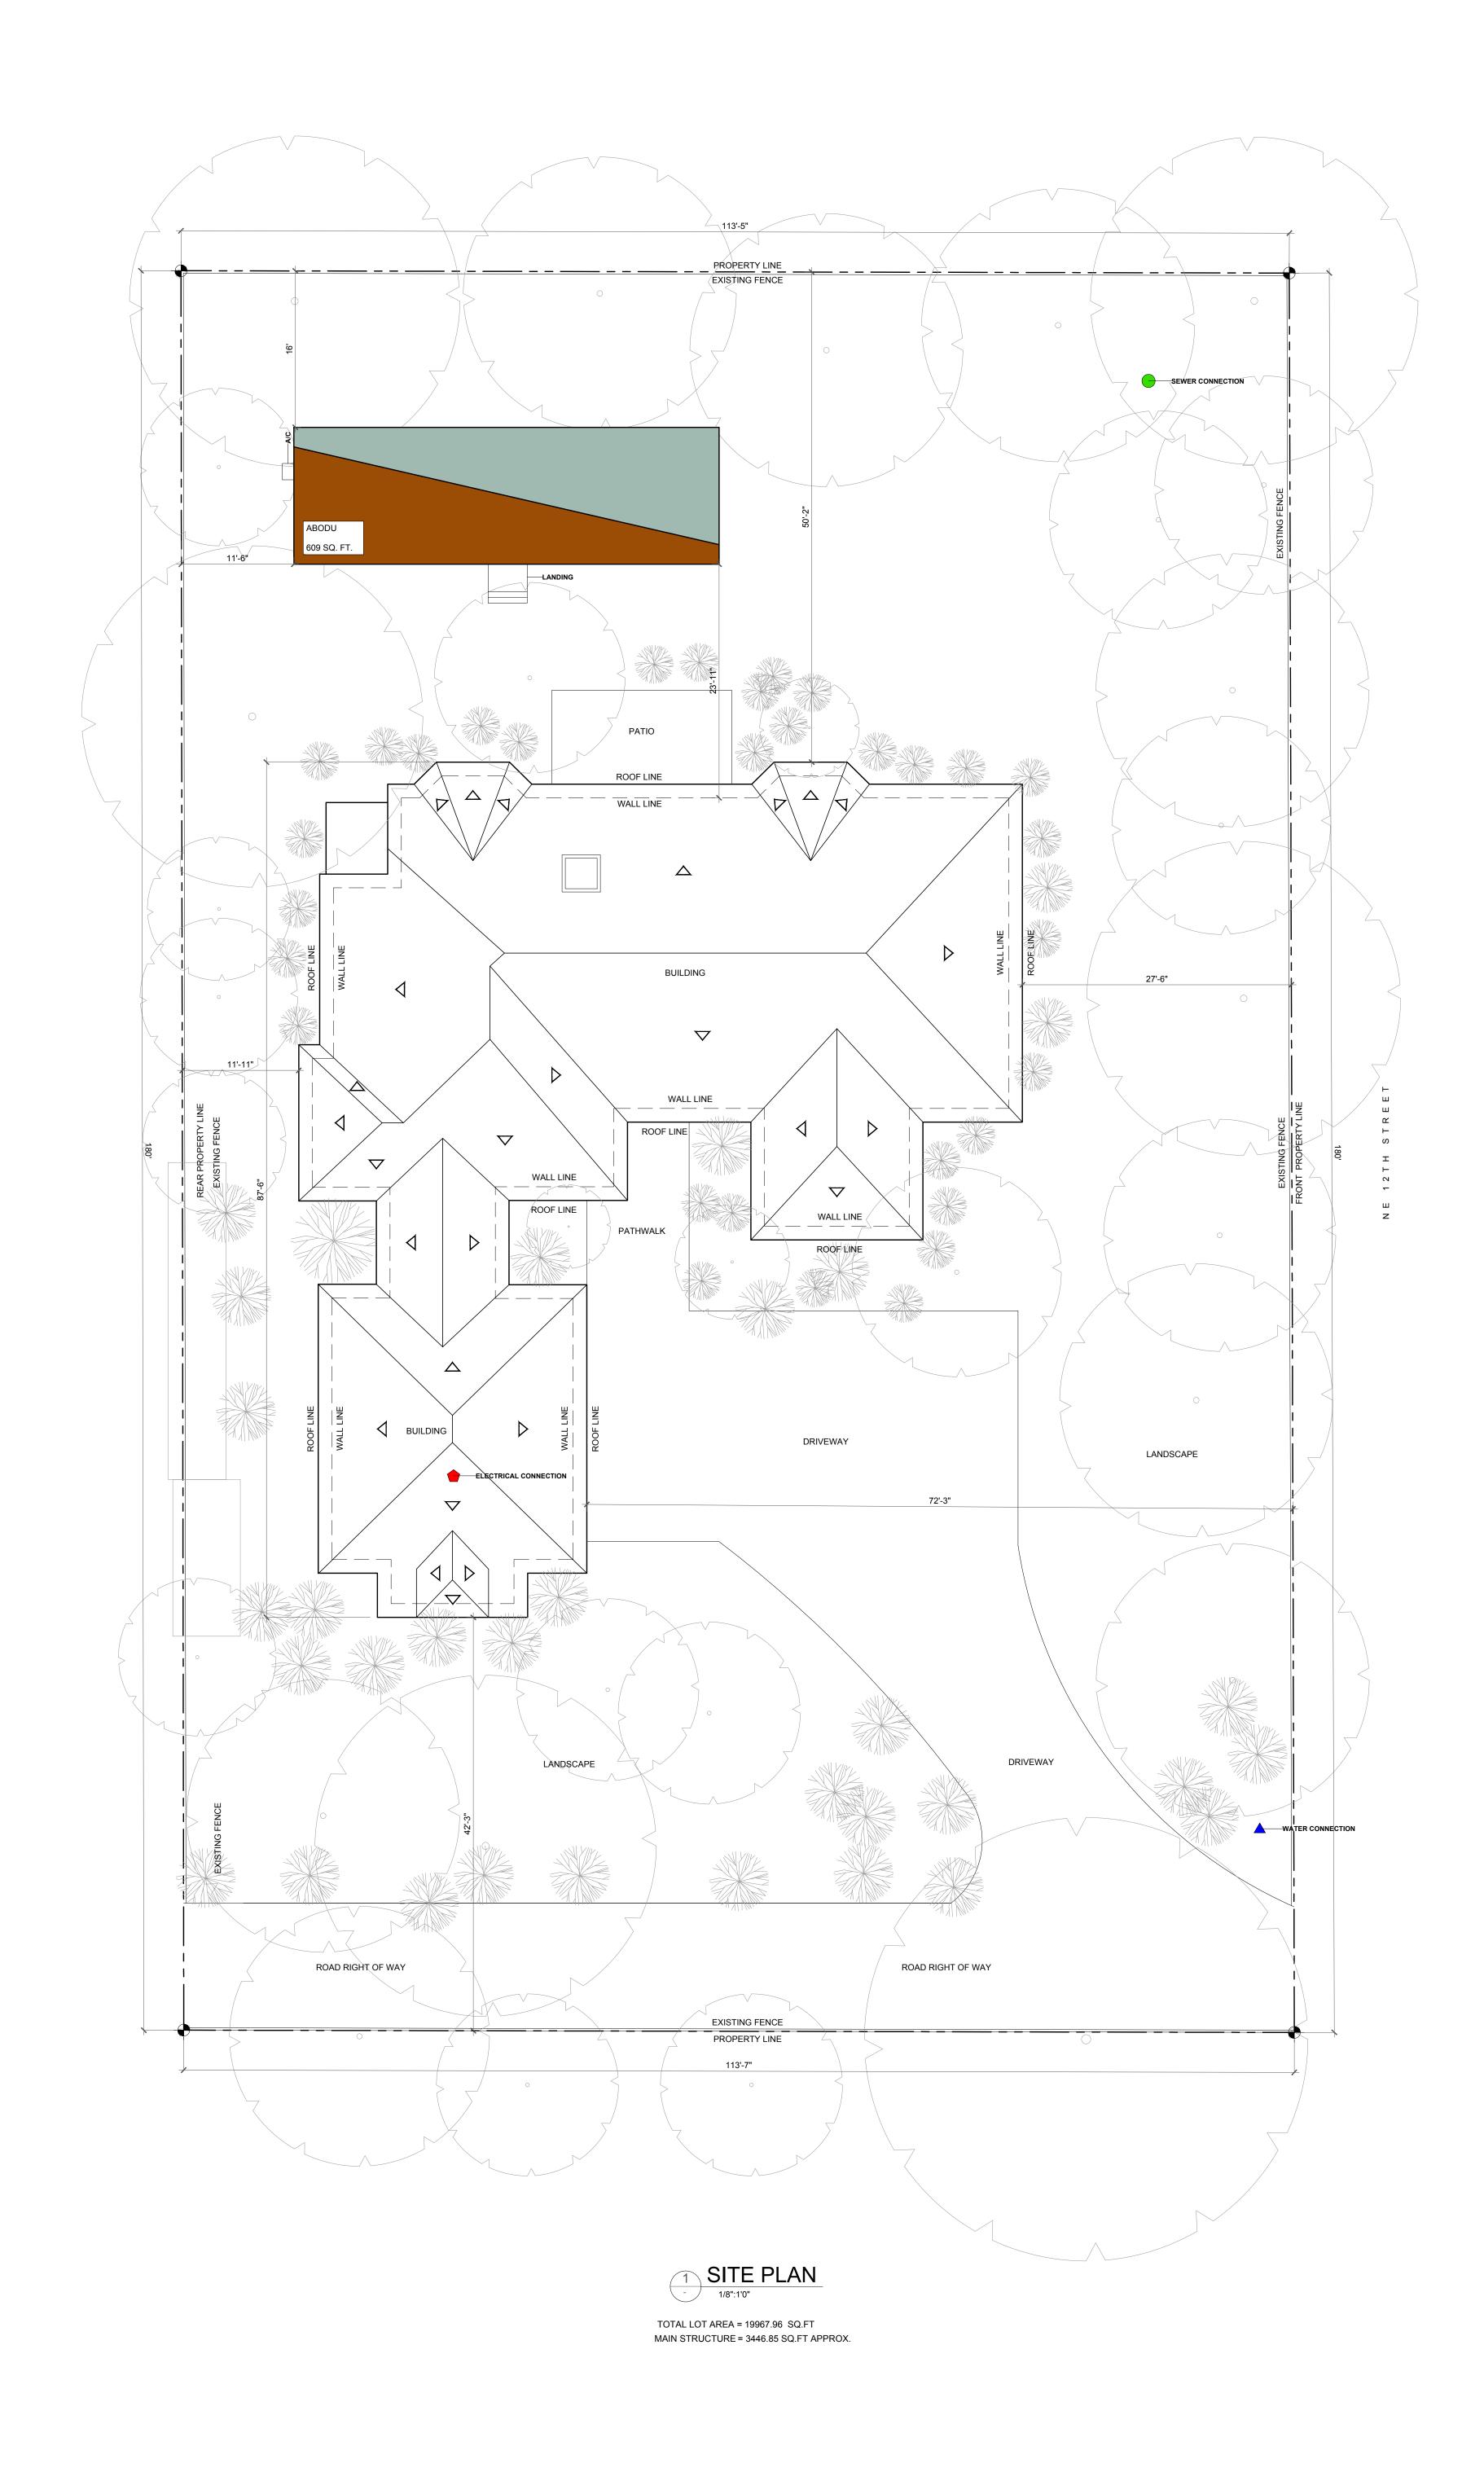







04.09.21

SAA

ISUS 81 APA

" KECEINED

MASTER BUILD PLAN

Onsite use and location of the modular

building is the jurisdiction of the local

building official. Site, grade and plot

drainage plans are not reviewed by LNI.

**METHOD HOMES** 

95 YESLER WAY SUITE 300 SEATTLE, WA 98104 T. 206.789.5553

# **BUILDING AREA SUMMARY**

MAIN HOUSE

TOTAL

3 Credits Required for Small Dwelling Unit Square Footage 609

3.5 CR

Fuel Normalization Heating Option 2 1.0 CR
Energy Opt 3.2 High Efficiency HVAC 1.0 CR
Energy Opt \$4 Efficient Water Heating 1.5 CR

**ENERGY CREDITS** 

**Total Credits Provided** 

Smoke Detectors per IRC R314: Smoke alarm note:
Ensure an alarm in the immediate vicinity of each sleeping area.

Verify specifications for alarm relationship to cooking appliance IRC R314 & WA amendments.

All alarms must be located per code

and the manufacturer's recommendations.

# PAGE INDEX

### SHEET NAME SHEET NUMBER

A 01

A 02 A100

A200

A300

A400 A600

E3.0

P1.1

S-1.2

S-2.0 S-2.1

2018 Prescriptive Energy Code Compliance for All Climate Zones in WA

COVER PAGE **GENERAL NOTES** FOUNDATION PLAN FLOOR PLAN **ELEVATIONS ROOF & DIMENSIONS** SECTIONS AND DETAILS WINDOW AND DOOR SCHEDULE

**ELECTRIC PLAN ELECTRICAL DETAILS** DWV/PLUMB SUPPLY SCHEMATICS PLUMBING RIER DIAGRAMS AND DETAILS MECHANICAL LAYOUT

STRUCTURAL TITLE SHEET STRUCTURAL SPECIFICATIONS STRUCTURAL NOTES FOR MODULE ENGINEERING MODULAR FLOOR AND ROOF FRAMING AND DETAILS

# **PROJECT TEAM**

OWNER: TBD SEATTLE

TBD SURVEY: CONTACT: TBD SEATTLE

STRUCTURAL: ASHLEY & VANCE ENGINEERING 1653 LUCERNE ST, SUITE D

**MINDEN, NV 89423** CONTACT: JORDAN P. DENIO.

CONTACT: JOHN BACON (206) 789 - 5553

PE (755) 289 - 1808

FERNDALE, WA 98248

GEOTECH:

**MODULAR** METHOD HOMES 95 YESLER WAY, SUITE 300 CONTRACTOR: SEATTLE, WA 98104

MODULAR PLANT LOCATION: 6819 NORTHGATE WAY

**GENERAL** CONTRACTOR:

TBD ADDRESS **ADDRESS** PHONE

# **DESIGN CRITERIA**

**STRUCTURAL** 

**ROOF LOADS: DEAD LOAD** LIVE / SNOW LOAD 20/75 PSF

FLOOR LOADS: **DEAD LOAD** LIVE LOAD 40 PSF **DECK DEAD LOAD** PSF

**DECK LIVE LOAD** 40 PSF WIND DESIGN: **ULTIMATE SPEED** 130 MPH 101 **M**PH NORMAL SPEED

**SESMIC DESIGN BASIS: SESMIC DESIGN** 

RISK CATEGORY

**PROJECT** TBD SEATTLE **ADDRESS** 

PROJECT DESCRIPTION:

PROJECT DATA

CONSTRUCTION OF MODULAR STRUCTURE WITH SITE BUILT FOUNDATION.

609 SF

TBD SEATTLE PARCEL NO.: TBD: **ABBREVIATED** LEGAL DESCRIPTION:

TYPE V-B TYPE OF CONSTRUCTION: SPRINKLERED: NO

APPLICABLE

2018 IRC (ARCH) W/ LOCAL AND STATE AMENDMENTS BUILDING CODES: 2018 IBC (STRUCT) W/ LOCAL AMENDMENTS **BUILDING CODES:** 2018 UPC W/ LOCAL AND STATE AMENDMENTS


2018 IMC W/ LOCAL AND STATE AMENDMENTS 2018 IFC W/ LOCAL AND STATE AMENDMENTS 2018 IECC/ WASHINGTON STATE ENERGY CODE AHJ: TBD


STATE OF WA L&I (OFF SITE MODULAR

AHJ: STATE OF WA (OFF SITE MODULAR)

LAND USE CODE CONFORMANCE: REFER TO SITE PLAN FOR ZONING / LAND USE INFORMATION

**DESIGN CRITERIA:** REFER TO STRUCTURAL CALCULATIONS

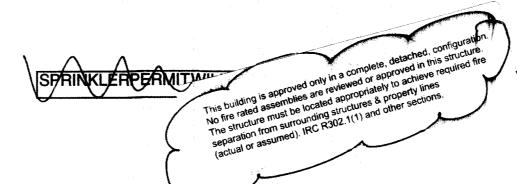

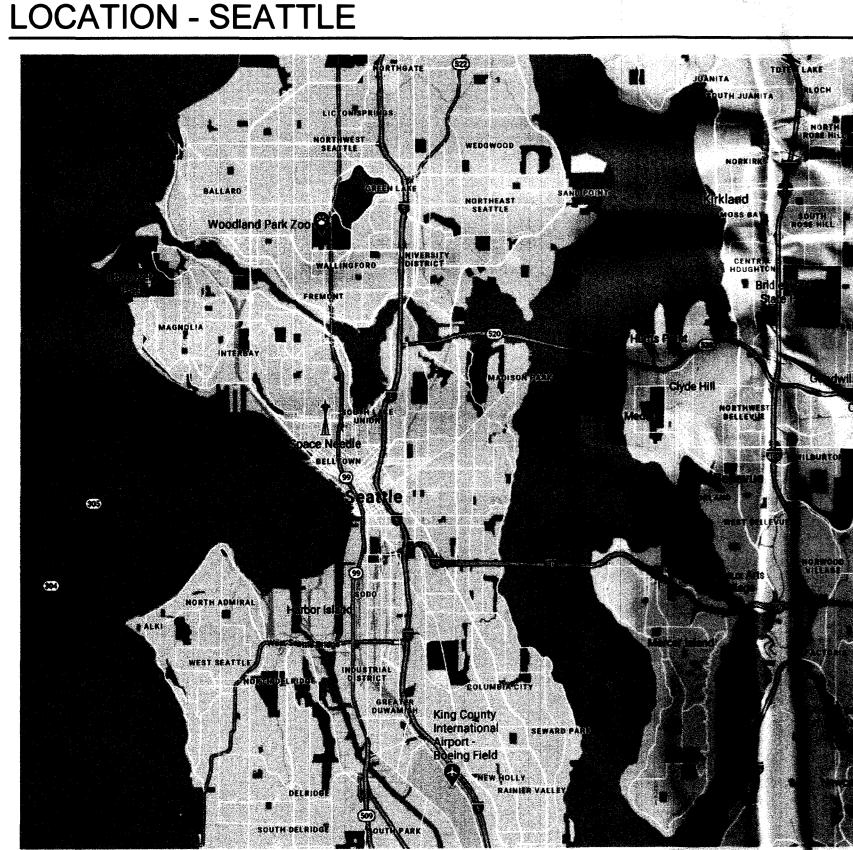

**EXPOSURE CATE**GORY SITE CLASS Foundation plans and details are not reviewed by L&I except for the reasonability of the design to support the modular building. Approval and inspection of the foundation system is the jurisdiction of the local building official. This is typical for all foundation related sheets, details and engineering contained within this plan set. STATE OF WASHINGTON DEPARTMENT OF LABOR AND INDUSTRIES FIELD SERVICES AND PUBLIC SAFETY PLAN APPROVAL # 1868 21 6086 SUBJECT TO FIELD INSPECTION OVERSIGHT

> Also see the NLEA (notice to local enforcement agency) form attached to this plan set. NLEA items may require review, approval and/or inspection by local authority having jurisdiction TYPICAL ALL SITE INSTALLED ITEMS

OR VIOLATION OF RCW IS NOT INCLUDED

BY: Local Date: 16/2/2021

EXPIRATION DATE: 16/30/2023


equipment must be installed per the manufacturer? specifications and in accordance with all applicable listings. Manufacturer's installation specifications shall be available on the jobsite at the time of inspection. Applicable working clearances must be maintained at all equipment **COVER SHEET** 


AB


Date 04.09.21 Drawn by Checked by


A00

Scale

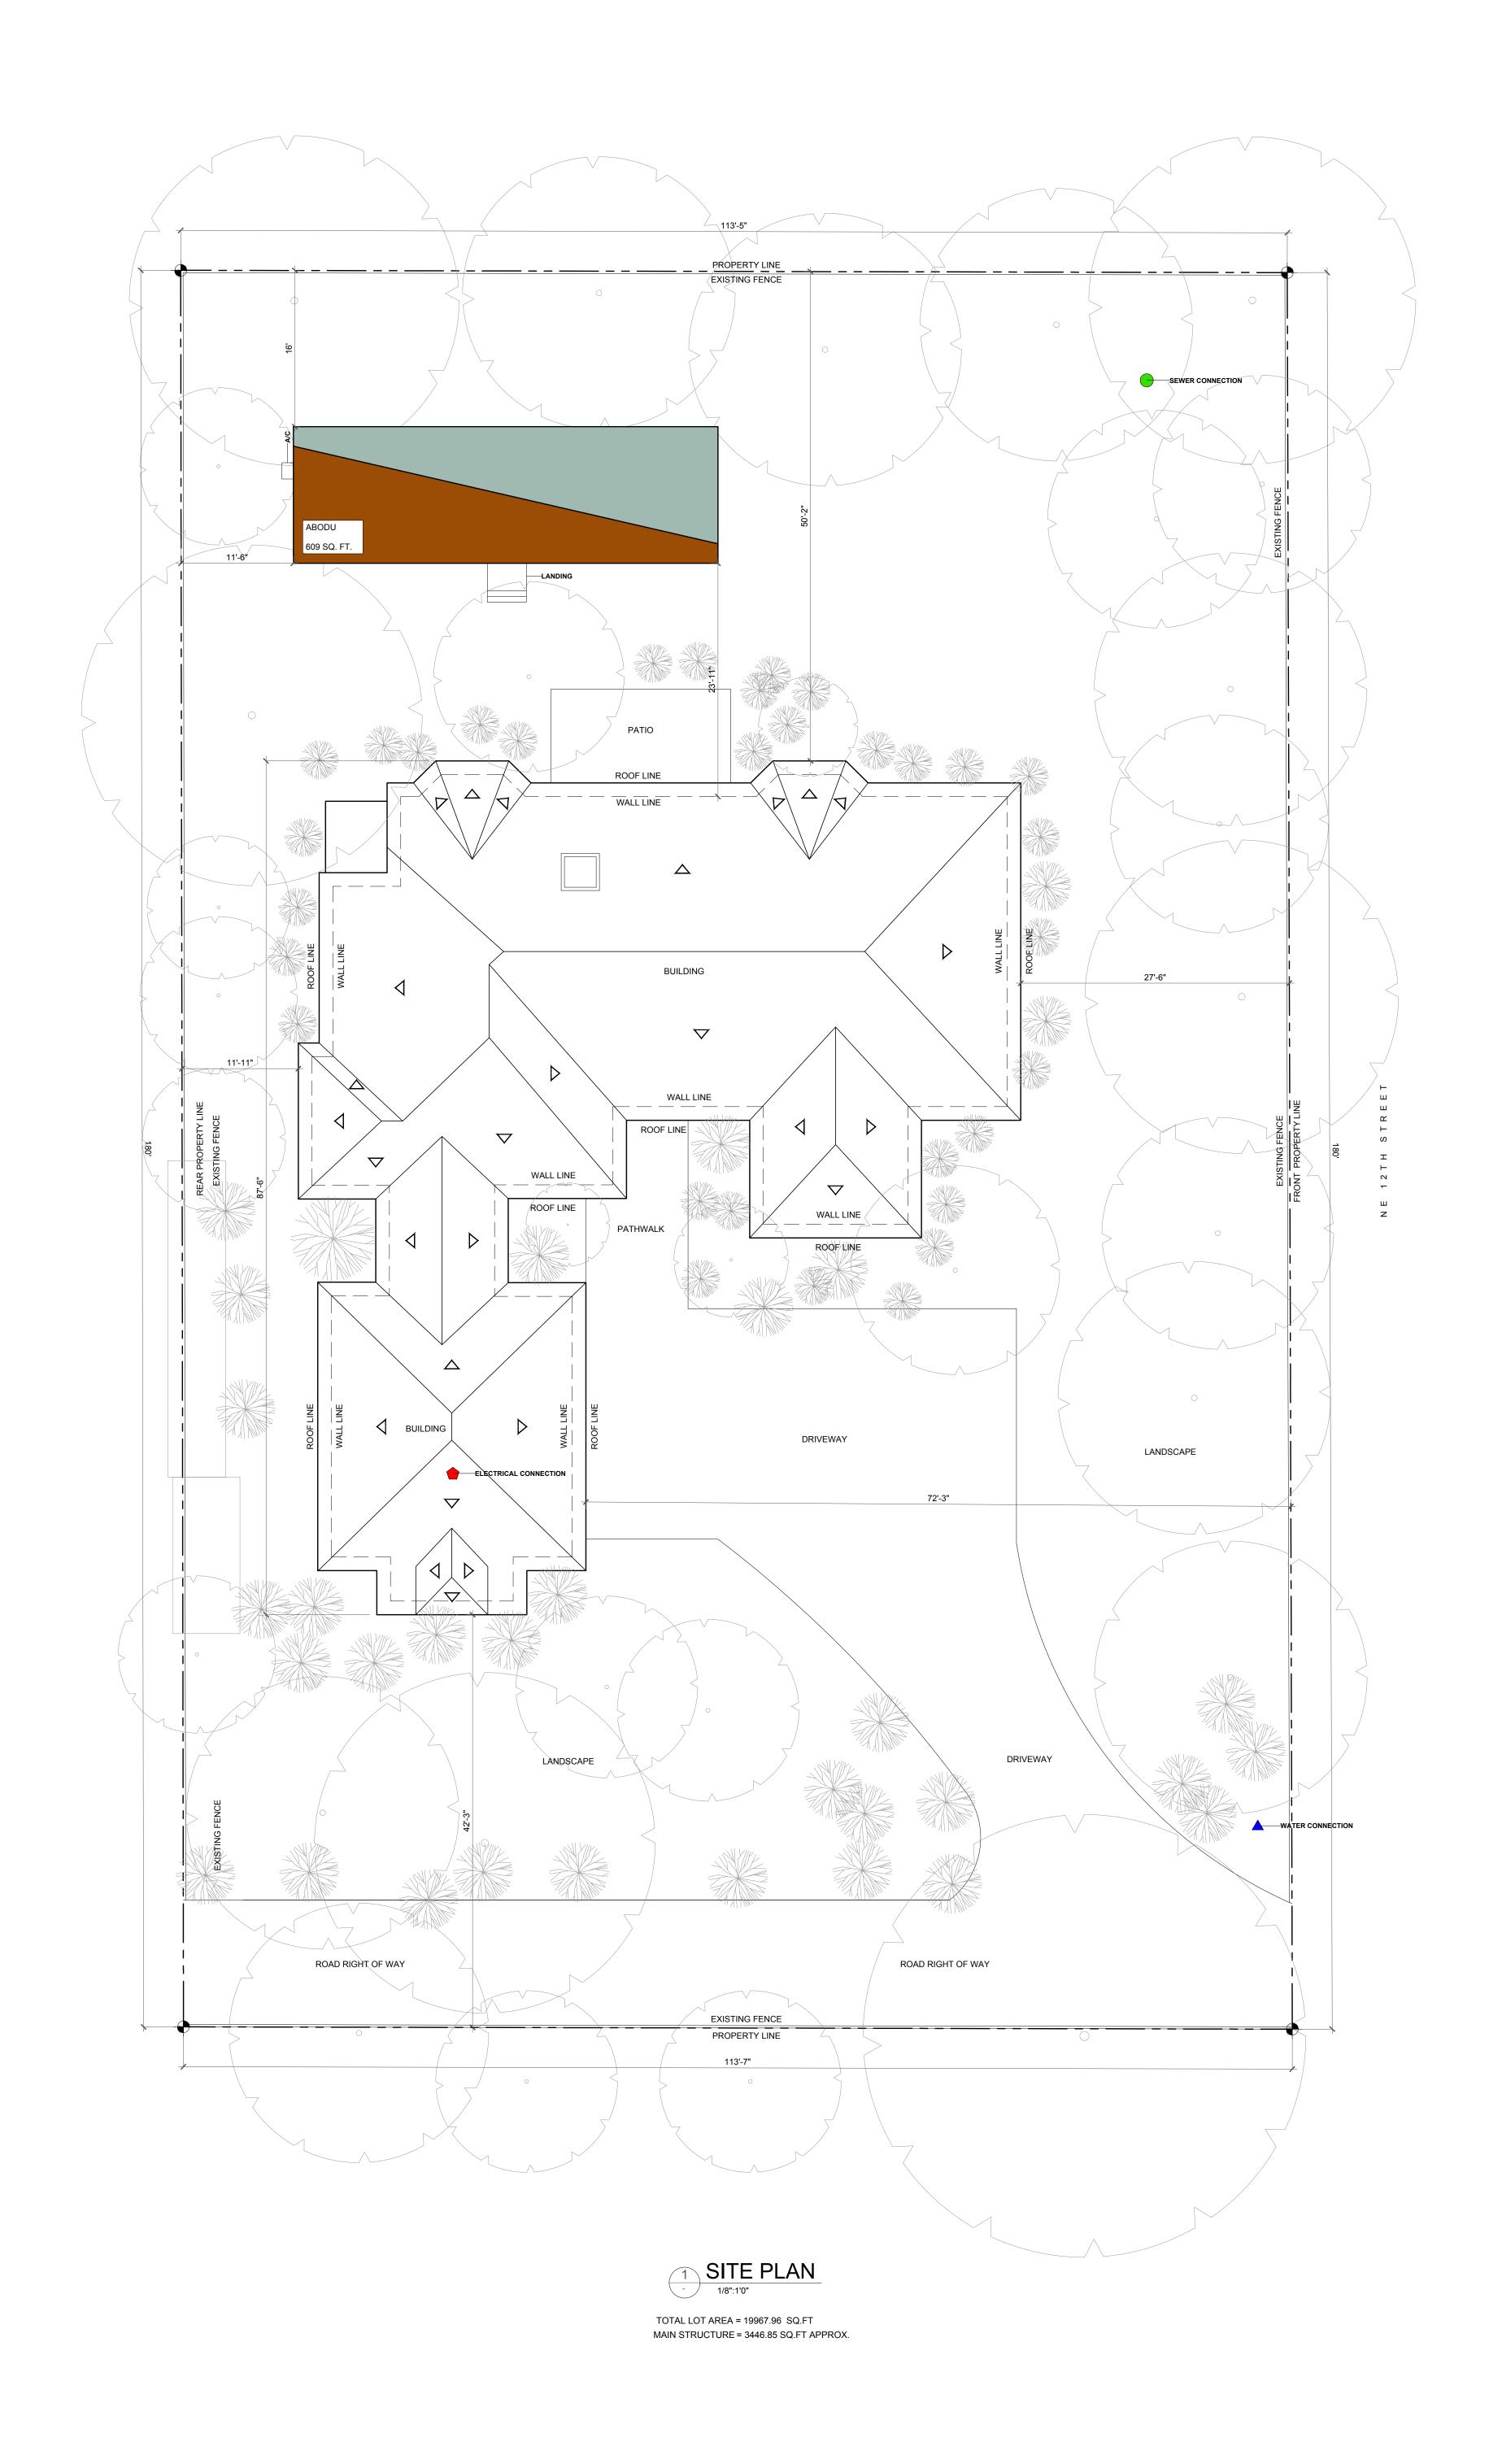







**ELEVATION** 

EQUIPMEN'

**FXCAVATE** 

EXHAUST

EXISTING

EXTERIOR

LEFT HAND

LENGTH OVER ALL

**BUILDING ELEVATION** 

INTERIOR ELEVATION

LENGTH

LINEAL FEET

LAMINATE VENEER LUMBER

MASONRY OPENING

MEDICINE CABINET

MDO MEDIUM DENSITY OVERLAY

MEDIUM DENSITY FIBERBO.

LIVELOAD

LOUVER

MFR MANUFACTURER

MAXIMUM

MECH MECHANIC (AL)

MFDIUM

METAL

MINIMUM

MIRROR

NOMINAL

NORTH

OBSCURE

OPAQUE

**OPENING** 

PAINT (ED)

ORIENTATED STRAND BOARD

OUTSIDE DIAMETER

POUNDS PER CUBIC FOOT

PREFABRICATED

PROPERTY LINE

PRESSURE TREATED

**TOILET PAPER HANGER** 

REFLECT (ED), (IVE), (OR)

REVISION(S), REVISED

ROUGH OPENING

SGD SLIDING GLASS DOOR

SHELF, SHELVING

PREFORMED

QUANTITY

RADIUS

QUARRY TILE

REFERENCE

REINFORCED

RETURN AIR

REQ'D REQUIRED

RISFR

ROOFING

ROOM

ROD

SCH SCHEDULE

SCN SCREEN

SECT SECTION

SHTH SHEATHING

SHEET

SIMILAR

SKYLIGHT

SOUTH

SPEC SPECIFICATION

STOVE

STEEL

SQUARE

STANDARD

STRUCTURAL

SUPPLY AIR

SOLID CORE

SHEAR WALL

SYSTEM

TOP OF

TOP OF WALL

TOWEL BAR

TYPICAL

UNFINISHED

VARNISH

VENEER

VERTICAL

WALL

VERTICAL GRAIN

VINYL SHEET

WATER CLOSE

WATER HEATER

WWM WELDED WIRE MESH

WEST

WINDOW

WITHOUT

WITH

WOOD

WATER PROOFING

WATER RESISTANT

WELDED WIRE FABRIC

OPERABLE WINDOW SECTION

**DETAIL CALLOUT** 

SMOKE DETECTOR

CARBON MONOXIDE DETECTOR

TUBULAR STEEL

UNO UNLESS NOTED OTHERWISE

VAPOR BARRIER

UNDERWRITERS LABORATORY

TEMP TEMPERED

TELEPHONE

STAINLESS STEEL

**TONGUE & GROOVE** 

TOP OF CONCRETE

SLIDER (ING)

SLAB

REV

RFG

SH

SKL

SLD

STD

STV

STL

STR

SYS

TEL

TIO

TOW

VERT

POUNDS PER LINEAL FOOT

POUNDS PER SQUARE FOOT

POUNDS PER SQUARE INCH

ON CENTER

NOT IN CONTRACT

MAS MASONRY

ALL WORK PERFORMED SHALL COMPLY WITH THESE GENERAL NOTES UNLESS OTHERWISE NOTED ON THE DRAWINGS AND SPECIFICATIONS. THE GENERAL CONTRACTOR SHALL COORDINATE THE GENERAL NOTES WITH THE WORK OF ALL TRADES, INCLUDING BUT NOT LIMITED TO THE MECHANICAL, ELECTRICAL, PLUMBING, FOOD SERVICE, AND ACOUSTICAL TRADES.

THE CONTRACTOR SHALL VISIT THE SITE AND BE KNOWLEDGEABLE OF CONDITIONS THEREOF. THE CONTRACTOR SHALL INVESTIGATE, VERIFY, AND BE RESPONSIBLE FOR ALL CONDITIONS OF THE PROJECT AND SHALL NOTIFY THE OWNER / ARCHITECT OF CONDITIONS REQUIRING MODIFICATION BEFORE PROCEEDING WITH THE WORK.

3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ACCURATE PLACEMENT OF THE BUILDING ON THE SITE.

WHERE DISCREPANCIES EXIST BETWEEN THE DRAWINGS OF VARIOUS DISCIPLINES, ARCHITECTURAL DRAWINGS SHALL GENERALLY BE ASSUMED TO GOVERN. IN SUCH INSTANCES, THE CONTRACTOR SHALL CONSULT THE ARCHITECT BEFORE PROCEEDING WITH

5. CONDITIONS WHICH ARE NOT DETAILED SHALL BE ASSUMED TO BE SIMILAR IN CHARACTER TO THOSE WHICH ARE, WHERE SPECIFIC DIMENSIONS, DETAILS, OR DESIGN INTENT CANNOT BE DETERMINED THE CONTRACTOR SHALL NOTIFY THE ARCHITECT PRIOR

CONSTRUCTION OF WORK INDICATED ON DRAWINGS AS (NIC) IS NOT IN CONTRACT. THE CONTRACTOR SHALL COORDINATE ALL TRADES OF HIS WORK, WHETHER DIRECTLY OR INDIRECTLY INVOLVED, WITH (NIC) WORK.

NON-OPERABLE WINDOW SECTION . ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF ALL APPLICABLE CODES AND GOVERNING AUTHORITIES AND SHALL BE OF BEST PRACTICE OF EACH TRADE.

> 8. ALL WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER DRAWN SPACE. DO NOT SCALE THE DRAWINGS.

9. ALL DIMENSIONS SHALL BE VERIFIED IN THE FIELD PRIOR TO PROCEEDING WITH THE WORK. THE CONTRACTOR IS TO NOTIFY THE ARCHITECT OF ANY DISCREPANCIES PRIOR TO PROCEEDING WITH THE WORK.

10. FINISHED FLOOR ELEVATIONS ARE TO TOP OF SUBFLOOR (WOOD / STEEL) OR TOP OF SLAB (CONCRETE) UNLESS OTHERWISE NOTED.

11. THE CONTRACTOR SHALL PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACK UP PLATES AND SUPPORTING BRACKETS REQUIRED FOR THE BEST POSSIBLE INSTALLATION OF ALL TOILET ROOM ACCESSORIES AND PARTITIONS, OWNER-FURNISHED ITEMS, AND ALL WALL-MOUNTED OR SUSPENDED MECHANICAL, ELECTRICAL, OR MISCELLANEOUS

12. THE FLAME SPREAD RATING FOR ALL MATERIALS SHALL CONFORM TO ALL APPLICABLE CODES

13. REFER TO CERTIFIED MECHANICAL AND ELECTRICAL DRAWINGS AND MANUFACTURER'S TEMPLATE DRAWINGS FOR ALL MECHANICAL AND ELECTRICAL EQUIPMENT SUPPORTS, BOLT SETUP TEMPLATES, SPRING AND VIBRATION ISOLATORS, ETC, NOT SHOWN

14. PROVIDE PROPER ANCHORAGE OF ESSENTIAL EQUIPMENT IN ACCORDANCE WITH

15. ALL PIPE DUCTS, BUSS DUCTS, AND CONDUITS THAT PENETRATE FLOOR SLABS AND/OR RATED WALLS SHALL BE INSTALLED IN A MANNER WHICH WILL PRESERVE THE FIRE RESISTIVE AND STRUCTURAL INTEGRITY OF THE BUILDING.

16. COORDINATE PLACEMENT OF ALL CEILING ELEMENTS WITH MECHANICAL, ELECTRICAL, AND CEILING INSTALLER. WHERE DISCREPANCIES EXIST BETWEEN DRAWINGS AND INSTALLATION, THE CONTRACTOR SHALL CONSULT WITH THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.

17. PROVIDE ACCESS PANELS FOR MECHANICAL AND ELECTRICAL EQUIPMENT AS REQUIRED BY APPLICABLE CODES. ALL ACCESS PANELS SHALL BE CONCEALED AND LOCATIONS SHALL BE SUBMITTED TO THE ARCHITECT FOR REVIEW PRIOR TO START OF WORK, ELECTRICAL 'J' BOXES, PLUMBING CLEANOUTS, FIRE DAMPERS, AND OTHER SIMILAR ITEMS REQUIRING ACCESS ARE NOT TO BE LOCATED ABOVE GWB OR SIMILAR CEILINGS.

18. CONTRACTOR SHALL SUBMIT TO THE ARCHITECT PRIOR TO STARTING THE WORK BUILDING ELECTRICAL, AUTOMATION, SECURITY, LIFE SAFETY, CONTROL, ETC. EQUIPMENT.

19. CONTRACTOR SHALL COORDINATE AND PROVIDE ALL SLAB AND WALL OPENINGS REQUIRED BY MECHANICAL AND ELECTRICAL CONTRACTORS.

INSTALLED IN A MANNER OBSTRUCTING FIRE DEPARTMENT ACCESS OR EGRESS.

DAMAGE. CONSULT WITH ARCHITECT PRIOR TO INSULATING.

HAVING A RATING & S LABEL IN ACCORDANCE WITH WALL ASSEMBLY.

25. ALL MASONRY DIMENSIONS ARE NOMINAL.

CEILING SURFACES U.O.N.

OR CEILINGS U.O.N.

PROCEEDING WITH THE WORK.

(PAINTED, SEALED, ETC).

RECEIVE PERMANENT PROJECT OCCUPANCY.

24. PROVIDE COLLISION BARRIERS ADEQUATE TO PROTECT ALL CONTROL METERS.

WHERE REQUIRED, DOORS OPENING INTO REQUIRED FIRE-RESISTIVE CORRIDORS

SHALL BE PROTECTED WITH A SELF-CLOSING SMOKE AND DRAFT CONTROL ASSEMBLY

28. PROVIDE FIRE DAMPERS OR DOORS WHERE DUCTS PENETRATE FIRE RATED WALLS

29. ALL ELEVATOR OPENINGS SHALL BE CERTIFIED BY THE ELEVATOR SUBCONTRACTOR

30. CONTRACTOR SHALL PROVIDE ALL REQUIRED SIGNAGE (MAXIMUM OCCUPANT LOAD,

31. ALL SURFACES EXPOSED TO VIEW SHALL BE PROVIDED WITH A FINISHED CONDITION

32. DEMOLITION / CONSTRUCTION SHALL CONFORM WITH CHAPTERS 33 IFC AND 33 IBC.

**EXHAUST FAN** 

DOOR NUMBER

**WINDOW NUMBER** 

33. SEE DRAWINGS FOR NOTES REGARDING WALL TYPES AND PARTITIONS

PRIOR TO FORMING. IF MODIFICATIONS ARE REQUIRED. THE CONTRACTOR SHALL BRING

SUCH MODIFICATIONS TO THE ATTENTION OF THE ARCHITECT AND OWNER PRIOR TO

GALVANIC ACTION AND/OR BREAKDOWN.

AGAINST EXPOSURE TO WEATHER AND CONTACT WITH DAMP OR WET SURFACES. 20. THE INSULATION CONTRACTOR SHALL PROVIDE CERTIFICATE OF COMPLIANCE TO THE STACK LUMBER AS WELL AS PLYWOOD AND OTHER PANELS; PROVIDE FOR AIR ARCHITECT / OWNER UPON COMPLETION OF WORK. CIRCULATION WITHIN AND AROUND STACKS AND UNDER TEMPORARY COVERINGS INCLUDING POLYETHYLENE AND SIMILAR MATERIALS. 21. CONTRACTOR SHALL VERIFY ALL CONCRETE / MASONRY OPENINGS PRIOR TO

FABRICATION OF DOORS AND FRAMES. FRAME NAILING TO BE IN COMPLIANCE WITH TABLE 602:3(1), I.R.C. 22. ALL DISSIMILAR METALS SHALL BE ISOLATED FROM ONE ANOTHER TO PREVENT

WOOD MEMBERS ENTERING MASONRY OR CONCRETE REQUIRES ONE-HALF INCH NET AIR SPACE ON TOP, SIDES, AND END. 23. ROOF OBSTRUCTION SUCH AS TELEVISION ANTENNAS OR GUY WIRES SHALL NOT BE

**ARCHITECTURAL NOTES** 

EXPERIENCED CRAFTSMEN.

PROVIDE FOR SUBSURFACE DRAINAGE.

ADJACENT FINISH GRADE.

TREATED WOOD.

ABOVE SUCH FLOORS.

JUSTIFYING STEEPER SLOPES ARE SUBMITTED.

WORK.

ALL WORK SHALL COMPLY WITH THE INTERNATIONAL RESIDENTIAL CODE (I.R.C.) 2018

CURRENT VERSIONS OF THE CODES COVERING PLUMBING, MECHANICAL, ELECTRICAL,

FIRE AND ENERGY CONSERVATION SHALL BE FOLLOWED. NOTIFY ARCHITECT OF ANY

DISCREPANCIES BETWEEN THE CONTRACT DOCUMENTS AND THE BUILDING CODES.

THESE DOCUMENTS ARE OF LIMITED SCOPE AND DO NOT COVER ALL CONSTRUCTION

DETAILS, CONDITIONS, FINISHES OR PRACTICES. THE CONTRACTOR IS ASSUMED TO

USE GOOD JUDGMENT IN THE EXECUTION OF THE SED OCUMENTS. GROUP ARCHITECT

(THE 'ARCHITECT') SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS

FROM THE MISINTERPRETATIONS OF THESE DOCUMENTS. THE CONTRACTOR SHALL

VERIFY ALL EXISTING AND NEW DIMENSIONS AND JOB CONDITIONS AND NOTIFY THE

METHODS, TECHNIQUES, SEQUENCE OR PROCEDURES REQUIRED TO PERFORM THE

ARCHITECT OF ANY DISCREPANCIES PRIOR TO PROCEEDING WITH THE WORK. THE

CONTRACTOR SHALL BE RESPONSIBLE FOR ALL SAFETY PRECAUTIONS AND THE

GRADE ENTIRE CONSTRUCTION AREA OF PROPERTY TO REASONABLY TRUE AND

EVEN SURFACES. SLOPE GROUND AWAY FROM BUILDING WALLS TO FACILITATE

DRAINAGE. GRADE TO UNIFORM LEVELS OR SLOPES BETWEEN POINTS WHERE

GRADES ARE NOTED ON DRAWINGS. ROUND SURFACES AT ABRUPT CHANGES IN

BACKFILL BEHIND RETAINING WALLS WITH FRIE DRAINING, GRANULAR FILL AND

CUT SLOPES FOR PERMANENT EXCAVATIONS SHALL NOT BE STEEPIN THAN 2

HORIZONTAL TO 1 VERTICAL AND SLOPES FOR PERMANENT FILLS SHALL BE NOT

FOUNDATION FOOTINGS SHALL BE PLACED UPON FIRM, UNDISTURBED NATIVE SOIL.

FOUNDATIONS SUPPORTING WOOD SHALL EXTEND AT LEAST 8 INCHES ABOVE THE

FOUNDATIONS FOR ALL BUILDINGS WHERE THE SURFACE OF THE GROUND SLOPES

MORE THAN 1 FOOT IN 10 FEET SHALL BE LEVEL, OR SHALL BE STEPPED SO THAT

INDIVIDUAL CONCRETE PIER FOOTINGS SHALL PROJECT A MINIMUM OF 8 INCHES

COLUMNS AND POSTSLOCATED ON CONCRETE OR MASONRY FLOORS OR DECKS

METAL PINDESTALS PROJECTING ABOVE FLOORS UNLESS APPROVED WOOD OF

ALSO SEE STRUCTURAL NOTES FOR ADDITIONAL REQUIREMENTS.

INSPECTION ISSUED BY AN APPROVED AGENCY.

OVER THE QUALITY OF THE PRODUCT AS SPECIFIED IN I.R.C.

NATURAL RESISTANCE TO DECAY OR TREATED WOOD IS USED. THE PEDESTALS

SHALL PROJECT AT LEAST 6 INCHES ABOVE EXPOSED EARTH AND AT LEAST 1 INCH

ALL LUMBER, PLYWOOD, PARTICLEBOARD, STRUCTURAL GLUED-LAMINATED TIMBER,

AND JOINTED LUMBER, FIBERBOARD SHEATHING (WHEN USED STRUCTURALLY),

I.R.C. AND SHALL BE SO IDENTIFIED BY THE GRADE MARK OR A CERTIFICATE OF

ALL LUMBER, TIMBER, PLYWOOD, AND POLES REQUIRED TO BE TREATED WOOD

UNDER SHALL BE IDENTIFIED BY THE QUALITY MARK OF AN APPROVED INSPECTION

AGENCY WHICH MAINTAINS CONTINUED SUPERVISION, TESTING, AND INSPECTION

DELIVERY AND STORAGE: KEEP MATERIALS UNDERCOVER AND DRY. PROTECT

CONFORM TO THE APPLICABLE STANDARDS OR GRADING RULES SPECIFIED IN THE

HARDBOARD SIDING (WHEN USED STRUCTURALLY), PILES AND POLES SHALL

EXPOSED TO THE WEATHER OR TO WATER SPLASH OR IN BASEMENTS AND WHICH

SUPPORT PERMANENT STRUCTURES SHALL BE SUPPORTED BY CONCRETE PIERS OR

ABOVE EXPOSED GROUND UNLESS THE COLUMNS OR POSTS IN WHICH THEY

SUPPORT ARE OF APPROVED WOOD OF NATURAL RESISTANCE TO DECAY OR

NOTIFY ARCHITECT IF UNDISTURBED SOIL DEPTH IS DIFFERENT FORM DRAWINGS.

STEEPER THAN 2 HORIZONTAL TO 1 VERTICAL UNLESS SUBSTANTIATING DATA

ALSO SEE STRUCTURAL NOTES FOR ADDITIONAL REQUIREMENTS.

MINIMUM FOOTING DEPTH 18" BELOW ADJACENT FINISH GRADE

BOTH TOP AND BOTTOM OF SUCH FOUNDATION ARE LEVEL.

WORK SHALL BE DONE TO CURRENT AREA WIDE STANDARDS AND PRACTICES BY

EDITION, AND ANY LOCAL OR STATE AMENDMENTS TO THE CODE. IN ADDITION THE

FOR CONVENTIONAL CONSTRUCTION, THE ENDS OF EACH JOIST SHALL HAVE NOT LESS THAN 1-1/2 INCHES OF BEARING ON WOOD ORMETAL, NORLESS THAN 3 INCHES ON MASONRY EXCEPT WHERE SUPPORTED ON A 1 X 4 RIBBON STRIP NAILED TO ADJOINING STUD. BEARING PARTITIONS PERPENDICULÁR TO JOISTS SHALL NOT BE REGULATORS, AND PIPING FOR HAZARDOUS MATERIALS THAT ARE EXPOSED TO VEHICULAR OFFSET FROM SUPPORTING GIRDERS, WALLS, OR PARTITIONS MORE THAN JOIST

JOISTS UNDER AND PARALLEL TO BEARING PARTITIONS SHALL BE DOUBLED.

26. CEILING HEIGHT DIMENSIONS ARE FROM DESIGNED FINISH FLOOR TO FINISHED SOLID BLOCKING SHALL BE PROVIDED OVERBEARING PARTITIONS, WALLS, AND

FIRE BLOCKING AND DRAFT STOPPING SHALL BE INSTALLED TO CUT OFF ALL CONCEALED DRAFT OPENINGS (BOTH VERTICAL AND HORIZONTAL) AND SHALL FORM AND EFFECTIVE BARRIER BETWEEN FLOORS, BETWEEN TOP STORY AND A ROOF OR ATTIC SPACE, FIRE BLOCKING SHALL CONSIST OF 2-INCH NOMINAL LUMBER, FIRE BLOCKING SHALL BE REQUIRED IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES, AT THE CEILING AND FLOOR LEVELS AND AT 10 FOOT INTERVALS BOTH HORIZONTALLY AND VERTICALLY: AT ALL INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES SUCH AS SOFFITS, DROP CEILINGS AND COVE CEILINGS; BETWEEN STAIR STRINGERS AT TOP AND BOTTOM AND ALONG RUN BETWEEN STUDS: IN OPENINGS AROUND VENTS, PIPES, DUCTS, CHIMNEYS, FIREPLACES AND SIMILAR OPENINGS WITH AFFORD A PASSAGE FOR FIRE AT CEILING AND FLOCK LEVELS, WITH NON-COMBUSTIBLE BUILDING ASSEMBLY, ETC) AS REQUIRED BY LOCAL BUILDING CODE AUTHORITY IN ORDER TO

> ALL WOOD EXPOSED TO WEATHER, SUCH AS WOOD USED FOR DECK FRAMING INCLUDING DECKING, RAILINGS, JOISTS, BEAMS, AND POSTS SHALL BE PRESSURE TREATED OR CEDAR PER I.R.C.

ROOF SHEATHING SHALL BE IN ACCORDANCE WITH I.R.C. PLYWOOD ROOF SHEATHING EXPOSED ON THE UNDERSIDE SHALL BE BONDED WITH EXTERIOR GLUE. APPLICATION OF ROOF COVERING MATERIALS SHALL BE IN ACCORDANCE WITH I.R.C.

THE NET FREE VENTILATING AREA OF ENCLOSED RAFTER OR ATTIC SPACES OR OTHER ENCLOSED BUT UNHEATED SPACES SHALL BE NOT LESS THAN 1/150 OF THE AREA OF EACH SPACE TO BE VENTILATED, EXCEPT THAT THE AREA MAY BE 1/300, PROVIDED THAT 50% OF THE REQUIRED VENTILATING AREA IS LOCATED AT LEAST 3 FEET ABOVE EAVE OR CORNICE VENTS WITH THEBALANCE BEING PROVIDED BY THE EAVE OR CORNICE VENTS, OR IF A VAPOR RETARDER NOT EXCEEDING A 1 PERM RATING IS INSTALLED ON THE WARM SIDE OF THE INSULATION. THE VENT AREA OPENINGS SHALL BE COVERED WITH CORROSION-RESISTANT METAL MESH WITH

EVERY SLEEPING ROOM SHALL HAVE AT LEAST ONE OPERABLE WINDOW OR EXTERIOR DOOR APPROVED FOR EMERGENCY ESCAPE OR RESCUE. ESCAPE OR RESCUE WINDOWS SHALL HAVE A MINIMUM NET CLEAR OPENING OF 5.7 SQUARE FEET. THE MINIMUM NET CLEAR OPENING HEIGHT DIMENSION SHALL BE 24 INCHES. THE MINIMUM NET CLEAR OPENING WIDTH DIMENSION SHALL BE 20 INCHES. WHERE WINDOWS ARE PROVIDED AS A MEANS OF ESCAPE OR RESCUE. THEY SHALL HAVE A FINISHED SILL HEIGHT NOT MORE THAN 44 INCHES ABOVE THE FLOOR.

MESH OPENINGS OF 1/4 INCH IN DIAMETER.

ALL CORRIDORS SHALL BE NOT LESS THAN 36 INCHES WIDE.

STAIRWAYS & RAILS

MAXIMUM RISE 7-3/4 INCHES. MINIMUM RUN 10 INCHES; HEADROOM MINIMUM 6 FEET 8 INCHES; MINIMUM WIDTH 36 INCHES. HANDRAILS TO HAVE ENDS RETURNED AND PLACED MINIMUM 34 INCHES; MAXIMUM 38 INCHES ABOVE TREAD NOSING. UNLESS DESIGNATED FOR THE DISABLED, THE HANDGRIP PORTION OF HANDRAILS SHALL BE NOT LESS THAN 1-1/4 INCHES NOR MORE THAN 2 INCHES IN CROSS-SECTIONAL DIMENSION OR THE SHAPE SHALL PROVIDE AN EQUIVALENT GRIPPING SURFACE. THE HANDGRIP PORTION OF HANDRAILS SHALL HAVE A SMOOTH SURFACE WITH NO SHARP CORNERS. HANDRAILS PROJECTING FROM A WALL SHALL HAVE A SPACE OF NOT LESS THAN 1-1/2 INCHES BETWEEN THE WALL AND THE HANDRAIL.

A FLOOR OR LANDING IS REQUIRED ON EACH SIDE OF AN EXTERIOR DOOR. AN EXTERIOR DOOR MAY OPEN AT A LANDING THAT IS NOT MORE THAN 7-3/4 INCHES LOWER THAN THE FLOORLEVEL, PROVIDED THE DOOR DOES NOT SWING OVER THE

STAIRS AND EXIT BALCONIES SHALL BE POSITIVELY ANCHORED TO THE PRIMARY STRUCTURE AT 8 FEET ON CENTER MAX, OR BE DESIGNED FOR LATERAL FORCES. SUCH ATTACHMENT SHALL NOT BE ACCOMPLISHED BY USE OF TOENAILS OR NAILS SUBJECT TO WITHDRAWAL.

SAFETY GLASS COMPLYING WITH IS REQUIRED IN THE FOLLOWING LOCATIONS: A GLAZING IN EGRESS AND INGRESS DOORS EXCEPT JALOUSIES. B. GLAZING IN FIXED AND SLIDING PANELS OF SLIDING DOOR ASSEMBLIES AND PANELS IN SWINGING DOORS OTHER THAN WARDROBE DOORS. C. GLAZING IN STORM DOORS.

D. GLAZING IN UNFRAMED SWINGING DOORS.

E. GLAZING IN DOORS AND ENCLOSURES FOR HOT TUBS, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS AND SHOWERS. GUAZING IN ANY PORTION OF A BUILDING WALL ENCLOSING THESE COMPARTMENTS WHERE THE BOTTOM EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE THE

F. GLAZING IN FIXED OR OPERABLE PANELS ADJACENT TO A DOOR WHERE THE NEAREST EXPOSED EDGE OF THE GLAZING IS WITHIN A 24 INCH ARC OF FITHER VERTICAL EDGE OF THE DOOR IN A CLOSED POSITION AND WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE THE WALKING

G. GLAZING IN AN INDIVIDUAL FIXED OR OPERABLE PANEL, OTHER THAN THOSE LOCATIONS DESCRIBED IN ITEMS E AND FABOVE, THAT MEETS ALL OF THE FOLLOWING CONDITIONS: EXPOSED AREA OF AN INDIVIDUAL PANE GREATER THAN 9 SQUARE FEET. EXPOSED BOTTOM EDGE LESS THAN 18 INCHES ABOVE THE FLOOR. EXPOSED TOP EDGE GREATER THAN 36 INCHES ABOVE THE FLOOR.

ONE OR MORE WALKING SURFACES WITHIN 36 INCHES HORIZONTALLY OF THE PLANE OF THE GLAZING. H. GLAZING IN RAILINGS REGARDLESS OF HEIGHT ABOVE THE WALKING SURFACE

EXCEPTION: THE FOLLOWING PRODUCTS AND APPLICATIONS ARE EXEMPT FROM THE REQUIREMENTS FOR HAZARDOUS LOCATIONS AS LISTED IN ITEMS A THROUGH G

GLAZING IN ITEM F WHEN THERE IS AN INTERVENING WALL OR OTHER PERMANENT BARRIER BETWEEN THE DOOR AND THE GLAZING. GLAZING IN ITEM G WHEN A PROTECTIVE BAR IS INSTALLED ON THE ACCESSIBLE SIDE OF THE GLAZING 34 TO 38 INCHES ABOVE THE FLOOR. THE BAR SHALL BE ABLE TO WITHSTAND A HORIZONTAL LOAD OF 50 P.L.F. WITHOUT CONTACTING THE GLASS AND BE A MINIMUM OF 1-1/2 INCHES IN HEIGHT, OPENINGS THROUGH WHICH A 3-INCH SPHERE CANNOT PASS, ASSEMBLIES OF LEADED, FACETED OR CARVED GLASS IN ITEMS A, B, F AND G WHEN USED FOR DECORATIVE PURPOSES. GLASSBLOCK PANELS COMPLYING WITH I.R.C.

SKYLIGHT GLAZING TO BE CONSTRUCTED OF: LAMINATED GLASS WITH A MINIMUM 0.015-INCH (0.38 mm) POLYVINYL BUTYRAL INTERLAYER FOR GLASS PANES 16 SQUARE FEET (1.5 m2) OR LESS IN AREA LOCATED SUCH THAT THE HIGHEST POINT OF THE GLASS IS NOT MORE THAN 12 FEET (3658 mm) ABOVE A WALKING SURFACE OR OTHER ACCESSIBLE AREA- FOR HIGHER OR LARGER SIZES, THE MINIMUM INTERLAYER THICKNESS SHALL BE 0.030 INCH (0.76 mm); FULLY TEMPERED GLASS; HEAT-STRENGTHENED GLASS; WIRED GLASS; APPROVED RIGID PLASTICS PER R308.6.2

ALL UNIT SKYLIGHTS INSTALLED IN A ROOF WITH A PITCH FLATTER THAN THREE UNITS VERTICAL IN 12 UNITS HORIZONTAL (26-PERCENT SLOPE) SHALL BE MOUNTED ON A CURB EXTENDING ATLEAST 4 INCHES (102 mm) ABOVE THE PLANE OF THE ROOF UNLESS OTHERWISE SPECIFIED IN THE MANUFACTURER'S INSTALLATION INSTRUCTIONS PER R308.6.8.

UNIT SKYLIGHTS SHALL BE TESTED BY AN APPROVED INDEPENDENT LABORATORY, AND BEAR A LABEL IDENTIFYING MANUFACTURER, PERFORMANCE GRADE RATING, AND APPROVED INSPECTION AGENCY TO INDICATE COMPLIANCE WITH THE REQUIREMENTS OF AAMAWOMA 101/I.S.2/NAFS PER R308.6.9.

FINISH CARPENTRY

FASTENERS AND ANCHORAGES: PROVIDE NAILS, SCREWS AND OTHER ANCHORING DEVICES OF TYPE, SIZE, MATERIAL AND FINISH SUITABLE FOR INTENDED USE AND REQUIRED TO PROVIDE SECURE ATTACHMENT, CONCEALED WHERE POSSIBLE. HOT-DIP GALVANIZE FASTENERS FOR WORK EXPOSED TO EXTERIOR AND HIGH HUMIDITIES TO COMPLY WITH ASTM A 153.

STANDING AND RUNNING TRIM: INSTALL WITH MINIMUM NUMBER OF JOINTS POSSIBLE USING FULL-LENGTH PIECES FROM MAXIMUM LENGTH OF LUMBER AVAILABLE. COPE AT RETURNS, MITER AT CORNERS TO PRODUCE TIGHT FITTING JOINTS. USE SCARF JOINTS FOR END-TO-END JOINTS.

INSTALL FINISH CARPENTRY WORK PLUMB, LEVEL, TRUE AND STRAIGHT WITH NO DISTORTIONS. SHIMAS REQUIRED USING CONCEALED SHIMS. SCRIBE AND CUT FINISH CARPENTRY ITEMS TO FIT ADJOINING WORK. ANCHOR FINISH-CARPENTRY WORK SECURELY TO SUPPORTS AND SUBSTRATES, USING CONCEALED FASTENERS AND BLIND NAILING WHERE POSSIBLE. USE FINE FINISHING NAILS FOR EXPOSED NAILING EXCEPT AS INDICATED, COUNTERSUNK AND FILLED FLUSH WITH FINISHED SURFACE.

ACCESS DOORS FROM CONDITIONED SPACES TO UNCONDITIONED SPACES (E.G., ATTICS AND CRAWL SPACES) SHALL BE WEATHER-STRIPPED AND INSULATED TO A LEVEL EQUIVALENT TO THE INSULATION ON THE SURROUNDING SURFACES. ACCESS SHALL BE PROVIDED TO ALL EQUIPMENT THAT PREVENTS DAMAGING OR COMPRESSING THE INSULATION. A WOOD FRAMED OR EQUIVALENT BAFFLE OR RETAINER MUST BE PROVIDED WHEN LOOSE FILL INSULATION IS INSTALLED. WHEN EAVE VENTS ARE INSTALLED. BAFFLING OF THE VENT OPENINGS SHALL BE PROVIDED SO AS TO DEFLECT THE INCOMING AIR ABOVE THE SURFACE OF THE INSULATION. BAFFLES SHALL BE RIGID MATERIAL, RESISTANT TO WIND DRIVEN MOISTURE. SECTION

CLEARANCES. WHERE REQUIRED, INSULATION SHALL BE INSTALLED WITH CLEARANCES ACCORDING TO MANUFACTURER'S SPECIFICATIONS. INSULATION SHALL BE INSTALLED SO THAT REQUIRED VENTILATION IS UNOBSTRUCTED. FOR BLOWN OR POURED LOOSE FILL, INSULATION CLEARANCES SHALL BE MAINTAINED THROUGH INSTALLATION OF A PERMANENT RETAINER.

ALL INSULATION MATERIALS, INCLUDING FACINGS SUCH AS VAPOR BARRIERS OR BUILDING PAPERS, INSTALLED WITHIN FLOOR/CEILING ASSEMBLIES, ROOF/CEILING ASSEMBLIES, CRAWL SPACES, OR ATTICS SHALL HAVE A FLAME-SPREAD RATING NOT TO EXCEED 25, AND A SMOKE DENSITY NOT TO EXCEED 450 WHEN TESTED IN ACCORDANCE WITH I.B.C. STANDARD NO.8-1. EXCEPTIONS: A) FOAM PLASTIC INSULATION SHALL COMPLY WITH SECTION 2606 OF THE INTERNATIONAL BUILDING CODE: AND B) WHEN SUCH INSULATION ARE INSTALLED IN CONCEALED SPACES. THE FLAME SPREAD AND SMOKE-DENSITY LIMITATIONS DO NOT APPLY TO THE FACING, PROVIDED THAT THE FACING IS INSTALLED IN SUBSTANTIAL CONTACT WITH THE UNEXPOSED SURFACE OF THE CEILING, FLOOR, FINISH.

ROOFS / CEILINGS

MAINTAIN 1" VENTILATION ABOVE BATT & RIGID INSULATION. IF BAFFLES ARE USED THEY SHALL BE RESISTANT TO MOISTURE, BE OF RIGID MATERIAL, AND INSTALLED TO AND EXTEND 6" VERTICALLY ABOVE BATTS OR 12" VERTICALLY ABOVE LOOSE FILL

ALL WALL INSULATION SHALL FILL THE ENTIRE CAVITY. EXTERIOR WALL CAVITIES ISOLATED DURING FRAMING (SUCH AS BEHIND BATHTUBS AND SHOWERS) SHALL BE FULLY INSULATED TO THE LEVELS OF SURROUNDING WALLS. ALL FACED INSULATION SHALL BE FACE STAPLED TO AVOID COMPRESSION. INSULATED HEADERS - RIGID INSULATED HEADERS REQUIRED FOR INTERMEDIATE AND ADVANCED FRAMING. OTHERWISE, FILL CAVITIES WITH REGULAR WALL INSULATION.

ALL FLOOR INSULATION SHALL BE INSTALLED IN A PERMANENT MANNER IN SUBSTANTIAL CONTACT WITH THE SURFACE BEING INSULATED. INSULATION SUPPORTS SHALL BE INSTALLED SO SPACING IS NO MORE THAN 24 INCHES ON CENTER, FOUNDATION VENTS SHALL BE PLACED SO THAT THE TOP OF THE VENT IS BELOW THE LOWER SURFACE OF THE FLOOR INSULATION.

PERIMETER INSULATION INSTALLED ON THE INSIDE OF THE FOUNDATION WALL SHALL EXTEND DOWNWARD FROM THE TOP OF THE SLAB FOR A MINIMUM OF 24 INCHES. INSULATION INSTALLED ON THE OUTSIDE OF THE FOUNDATION SHALL EXTEND DOWNWARD FROM THE TOP TO THE BOTTOM OF THE FOOTING. THERMAL BREAKS SHALL BE PLACED IN THE SLAB BETWEEN CONDITIONED AND UNCONDITIONED SPACES. THE ENTIRE AREA OF A RADIANT SLAB SHALL BE THERMALLY ISOLATED FROM THE SOIL. THE INSULATION SHALL BE AN APPROVED PRODUCT FOR ITS INTENDED USE A BELOW GRADE EXTERIOR WALL INSULATION (COLD) SIDE OF THE WALL SHALL EXTEND FROM THE TOP OF THE BELOW GRADE WALL TO THE TOP OF THE BELOW GRADE FLOOR AND SHALL BE APPROVED FOR BELOW-GRADE USE. ABOVE GRADE INSULATION SHALL BE PROTECTED.

B. INSULATION USED ON THE INTERIOR (WARM SIDE OF THE WALL) SHALL EXTEND FROM THE TOP OF THE BELOW-GRADE WALL TO THE BELOW-GRADE FLOOR LEVEL.

ALL PLASHINGS TO BE 26 GAGALVANIZED METAL OR ALUMINUM ALLOY ANODIZED FINISH. INSTALL FLASHINGS IN ALL LOCATIONS TO MAKE BUILDING WATERTIGHT. THESE AREAS WOULD INCLUDE BUT NOT BE LIMITED TO COPINGS, CAPS, GRAVEL STOPS, BEAM CAPS, DRIP CAPS OVER DOORS WINDOWS AND OTHER OPENINGS, AND ROOF AND WALL INTERSECTIONS.

THE FOLLOWING OPENINGS IN THE BUILDING ENVELOPE SHALL BE CAULKED OR OTHERWISE SEALED TO LIMIT INFILTRATION. AROUND GLAZING AND DOOR FRAMES. BETWEEN THE UNIT AND THE INTERIOR SHEET ROCK OR THE TOUGH FRAMING AS SHOWN IN DETAILS WITH SPRAY FOAM SEALER; BETWEEN ALL EXTERIOR WALL SOLE PLATES AND THE STRUCTURAL FLOOR, USING TWO ROWS OF CAULKING AS SHOWN IN DETAILS; OVER ALL FRAMING JOINTS WHERE FLOORS OVER CONDITIONED SPACES INTERSECT EXTERIOR WALLS (E.G. AT RIM AND BAND JOISTS) AS SHOWN IN DETAILS AROUND OPENINGS IN THE BUILDING ENVELOPE FOR DUCTS, PLUMBING, ELECTRICITY TELEPHONE, AND CABLE TELEVISION LINES IN WALLS, CEILINGS AND FLOORS, AT OPENINGS IN THE CEILING, (E.G. WHERE CEILING PANELS MEET INTERIOR AND EXTERIOR WALLS; AT EXPOSED BEAMS, MASONRY FIREPLACES, WOODSTOVE FLUES, ETC.); AT PENETRATIONS. ALL OPENINGS IN THE AIR BARRIER INCLUDING SPACES AROUND PLUMBING, ELECTRIC CONDUITS AND BOXES, AND TELEPHONE SERVICE ENTRANCES. PENETRATIONS OF EXTERIOR CEILINGS AND WALLS BY METAL INSULTED FLUES SHALL BE SEALED ACCORDING TO MANUFACTURER'S SPECIFICATIONS: AT RECESSED LIGHTING FIXTURES IN UNHEATED AREAS. SEAL AROUND THE EXTERIOR CAN TO BE AIR TIGHT, THE MOUNTING FLANGE ON THE EXTERIOR CAN IS CAULKED TO THE GWB. AT ELECTRICAL OUTLETS; SEAL GAPS BETWEEN GWB AND OUTLET BOX.


SUPPLEMENTAL CONDITIONS

CONTRACTOR'S GENERAL COMMERCIAL LIABILITY INSURANCE SHALL CONTAIN NO EXCLUSION THAT WOULD DENY COVERAGE FOR ANY CLAIM FOR EITHER BODILY INJURY OR PROPERTY DAMAGE ARISING OUT OF OR OTHERWISE CAUSED, IN WHOLE OR IN PART, BY ANY FUNGUS, MILDEW, MOLD, OR RESULTING ALLERGENS. IF SUCH EXCLUSION EXISTS AND CANNOT BE REMOVED BY ENDORSEMENT, CONTRACTOR SHALL SUBMIT PROOF OF COVERAGE FOR MOLD CLAIMS UNDER A POLLUTION LEGAL LIABILITY OR CONTRACTOR'S POLLUTION LIABILITY POLICY.

WHOLE HOUSE MECHANICAL VENTILATION WHOLE HOUSE VENTILATION SYSTEM SHALL COMPLY WITH IRC CODE REQUIREMENTS. FOR SIZING, CONTROLS, DUCTING, NOISE AND OTHER REQUIREMENTS.

EXHAUST FANS PROVIDING SOURCE SPECIFIC VENTILATION SHALL HAVE MINIMUM FAN FLOWRATING NOT LESS THAN 50 CFM AT 0.25 INCHES WATER GAUGE FOR BATHROOM LAUNDRIES OR SIMILAR ROOMS AND 100 CFM AT 0.25 INCHES WATER GAUGE FOR

WHOLE HOUSE VENTILATION SYSTEMS MAY CONSIST OF WHOLE HOUSE EXHAUST, INTEGRATION WITH FORCED-AIR SYSTEMS OR DEDICATED HEAT RECOVERY VENTILATION SYSTEMS. WHOLE HOUSE EXHAUST SYSTEMS SHALL MEET THE FOLLOWING REQUIREMENTS:

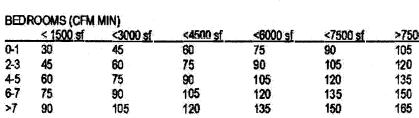

INTEGRATED FORCED AIR VENTILATION SYSTEMS SHALL HAVE BINCH DIAMETER OF EQUIVALENT OUTDOOR AIR INLET DUCT CONNECTING A TERMINAL ELEMENT ON THE OUTSIDE OF THE BUILDING TO THE RETURN PLENUM OF THE FORCED-AIR SYSTEM. THE OUTDOOR AIR INLET DUCT SHALL BE EQUIPPED WITH A DAMPERS OR OTHER DEVICE THAT REGULATES AIRPLOW TO MINIMUM OF 0.35 AIR CHANGES PER HOUR BUT NOT CREATE THE 0.50 AIR CHANGES PER HOUR UNDER NORMAL OPERATIC

WHOLE HOUSE VENTILATION USING EXHAUST FANS: OUTDOOR AIR SHALL BE SUPPLIED TO EACH HABITABLE SPACE BY INDIVIDUAL OUTDOOR AIR INLETS, INDIVIDUAL ROOM OUTDOOR AIR INLETS SHALL HAVE A CONTROLLABLE AND SECURE OPENING AND IT SHOULD NOT COMPROMISE THE THERMAL PROPERTIES OF THE STRUCTURE. THE AIR INLET MUST BE CAPABLE OF A TOTAL OPENING AREA OF NOT LESS THAN FOUR SQUARE INCHES AND TESTED BY A NATIONALLY RECOGNIZED STANDARD OR APPROVED AGENCY AND LOCATED TO AVOID DRAFTS. THE INLETS SHALL BE SCREENED AND LOCATED AWAY FROM VENT OUTLETS, HAZARDOUS FUMES, PLUMBING DRAINAGE SYSTEMS, ATTIC, CRAWL SPACES, AND GARAGES.

DOMESTIC KITCHEN RANGE VENTILATION AND DOMESTIC CLOTHES DRYERS SHALL BE OF METAL AND HAVE SMOOTH INTERIOR SURFACES, DUCTS SHALL BE SUBSTANTIALLY AIRTIGHT AND SHALL COMPLY WITH THE PROVISIONS OF THE I.M.C. EXHAUST DUCTS SHALL TERMINATE OUTSIDE OF THE BUILDING AND BE EQUIPPED WITH BACK DRAFT DAMPERS, DOMESTIC CLOTHES DRYERS SHALL BE EXHAUSTED DIRECTLY TO THE OUTSIDE IF IN AN AREA THAT IS HABITABLE OR CONTAINING OTHER FUEL BURNING APPLIANCES AND SHALL MEET THE PROVISIONS OF THE I.M.C., AS WELL AS CLOTHES DRYER MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS. DRYER EXHAUS DUGTS SHALL TERMINATE ON THE OUTSIDE OF THE BUILDING AND SHALL BE EQUIPPED WITH A BACKDRAFT DAMPER. DUCTS SHALL NOT BE CONNECTED OR INSTALLED WITH SHEET METAL SCREWS OR OTHER FASTENERS THAT WILL OBSTRUCT THE FLOW. UNLESS OTHERWISE PERMITTED OR REQUIRED BY THE DRYER MANUFACTURER'S INSTRUCTIONS AND APPROVED BY THE BUILDING OFFICIAL, DRYER EXHAUST DUCTS SHALL NOT EXCEED A TOTAL COMBINED HORIZONTAL AND VERTICAL LENGTH OF 14 FEET. INCLUDING TWO 90-DEGREE ELBOWS. TWO FEET SHALL BE DEDUCTED FOR EACH 90-DEGREE ELBOW IN EXCESS OF TWO.

WATER CLOSET COMPARTMENT MINIMUM 30" WIDE WITH 2" CLEAR SPACE IN FRONT OF

SHOWER WALLS SHALL BE RELATIVELY SMOOTH, HARD, NONABSORBENT, AND NOT ADVERSELY AFFECTED BY MOISTURE TO A HEIGHT OF NOT LESS THAN 70 INCHES ABOVE THE DRAIN INLET. WHEN GYPSUM IS USED AS A BASE FOR TILE OR WALL PANELS FOR TUB OR SHOWER ENCLOSURES OR WATER CLOSET COMPARTMENTS WALLS, WATER-RESISTANT GYPSUM BACKING BOARD COMPLYING WITH I.B.C. SHALL BE USED, EXCEPT THAT WATER-RESISTANT GYPSUM BOARD SHALL NOT BE USED IN THE FOLLOWING LOCATIONS: A) OVER A VAPOR RETARDER; B) IN AREAS SUBJECT TO CONTINUOUS HIGH HUMIDITY, SUCH AS SAUNAS OR STEAM ROOMS; AND C) ON CEILINGS.

ALL SOLID FUEL-BURNING APPLIANCES SHALL COMPLY WITH THE PROVISIONS OF I.M.C. WOOD STOVES SHALL BE APPROVED BY THE BUILDING OFFICIAL FOR SAFE USE OR COMPLY WITH APPLICABLE NATIONALLY RECOGNIZED STANDARDS AS EVIDENCED BY THE LISTING AND LABEL OF AN APPROVED AGENCY.

LISTED APPLIANCES. THE INSTALLER SHALL LEAVE THE MANUFACTURER'S INSTALLATION INSTRUCTIONS ATTACHED TO THE APPLIANCE. CLEARANCES OF LISTED APPLIANCES FROM COMBUSTIBLE MATERIALS SHALL BE AS SPECIFIED IN THE LISTING OR ON THE RATING PLATE

Exhibit 7

HEATING SYSTEMS ALL WARM AIR FURNACES SHALL BELISTED AND LABELED BY AN APPROVED AGENCY AND INSTALLED TO LISTED SPECIFICATIONS.

NO WARM AIR FURNACES SHALL BE INSTALLED IN A ROOM USED OR DESIGNED TO BE USED AS A BEDROOM, BATHROOM, CLOSET, OR IN ANY ENCLOSED SPACE WITH ACCESS ONLY THROUGH SUCH ROOM OR SPACE, EXCEPT DIRECT VENT FURNACES, ENCLOSED FURNACES, AND ELECTRIC HEATING FURNACES.

LIQUEFIED PETROLEUM GAS BURNING APPLIANCES SHALL NOT BE INSTALLED IN A PIT, BASEMENT, OR SIMILAR LOCATION WHERE HEAVIER-THAN-AIR GAS MIGHT

APPLIANCES SO FUELED SHALL NOT BE INSTALLED IN AN ABOVE GRADE UNDER FLOOR SPACE OR BASEMENT. NO WARM AIR FURNACE SHALL BE INSTALLED IN A CLOSET OR ALCOVE LESS THAN 12 INCHES WIDER THAN THE FURNACE OR FURNACES INSTALLED THEREIN WITH A MINIMUM CLEAR WORKING SPACE LIGS. THAN 3 INCHES ALONG THE SIDES, BACK, AND TOP OF THE FURNACE.

APPLIANCES DESIGNED TO BE IN A FIXED POSITION SHALL BE SECURELY FASTENED IN PLACE. SUPPORTS FOR APPLIANCES SHALL BE DESIGNED AND CONSTRUCTED TO SUSTAIN VERTICAL AND HORIZONTAL LOADS WITHIN THE STRESSLIMITATIONS IN THE BUILDING CODE.

FIRE DAMPERS NEED NOT BE INSTALLED IN AIR DUCTS PASSING THROUGH THE WALL, FLOOR, OR CEILING SEPARATING A RESIDENCE (GROUP R, DIVISION 3 OCCUPANCY) FROM A GARAGE (GROUP U, DIVISION 1 OCCUPANCY), PROVIDED SUCH DUCTS WITHIN THE GARAGE ARE CONSTRUCTED OF STEEL HAVING A THICKNESS NOT LESS THAN 0.019 (NCH (NO. 26 GALVANIZED SHEET GAUGE) AND HAVE NO OPENINGS INTO THE GARAGE.

ALL FUEL BURNING EQUIPMENT SHALL BE PROVIDED WITH COMBUSTION AIR AND MEET THE PROVISIONS OF CHAPTER 6, LM.C. APPLIANCES LOCATED WITHIN THE BUILDING ENVELOPE SHALL OBTAIN COMBUSTIONAIR FROM OUTDOORS. HEATING EQUIPMENT LOCATED WITHIN THE BUILDING ENVELOPE SHALL BE THERMALLY ISOLATED FROM THE HEATED AREA.

EVERY APPLIANCE DESIGNED TO BE VENTED SHALL BE CONNECTED TO A VENTING SYSTEM COMPLYING WITH THE I.M.C.

EVERY FACTORY BUILT CHIMNEY, TYPEL VENT, TYPE B GAS VENT, OR TYPE BW GAS VENT SHALL BE INSTALLED IN ACCORDANCE WITH THE TERMS OF ITS LISTING, MANUFACTURER'S INSTRUCTIONS, AND THE APPLICABLE PROVISIONS

VENT CONNECTORS SHALL BE INSTALLED WITHIN THE SPACE OR AREA IN WHICH THE APPLIANCE IS LOCATED AND SHALL BE CONNECTED TO A CHIMNEY OR VENT IN SUCH A MANNER AS TO MAINTAIN THE CLEARANCE TO COMBUSTIBLES PER

THERMOSTAT - WALL THERMOSTAT, LOW VOLTAGE, HEAT ANTICIPATING, FOUR TIME PERIODS PER DAY WITH INTELLIGENT RECOVERY FEATURE. PRIMARY SPACE CONDITIONING SYSTEMS IN EACH DWELLING UNIT REQUIRE A PROGRAMMABLE THERMOSTAT WITH A 5-2 SCHEDULE (MINIMUM). EACH ADDITIONAL SYSTEM WITHIN A DWELLING MUST HAVE AN ADJUSTABLE

DUCTS - DUCTS CANNOT DISPLACE REQUIRED INSULATION. BUILDING CAVITIES CANNOT BE USED AS DUCTS. DUCTSLOCATED OUTSIDE THE CONDITIONED

SMOKE DETECTOR

ASMOKE DETECTOR SHALL BE INSTALLED IN EACH SLEEPING ROOM AND AT A POINT CENTRALLY LOCATED IN THE CORRIDOR OR AREA GIVING ACCESS TO EACH SEPARATE SLEEPING AREA. WHEN THE DWELLING UNIT HAS MORE THAN ONE STORY AND IN DWELLINGS WITH A BASEMENT, A DETECTOR SHALL BE INSTALLED ON EACH LEVEL AND IN THE BASEMENT. IN DWELLING UNITS WHERE A STORY OR BASEMENT SPLIT INTO TWO OR MORE LEVELS. A DETECTOR SHALL BE INSTALLED ON THE UPPER LEVEL, EXCEPT THAT WHEN THE LOWER LEVEL CONTAINS A SLEEPING AREA, A DETECTOR SHALL BE PLACED ON EACH LEVEL. WHEN SLEEPING ROOMS ARE LOCATED ON THE UPPER LEVEL, A DETECTOR SHALL BE PLACED AT THE CEILING OF THE UPPERLEVEL IN CLOSE PROXIMITY TO THE STAIRWAY. WHERE THE CEILING HEIGHT OF A ROOM OPEN TO THE HALLWAY SERVING THE SLEEPING ROOMS EXCEEDS THAT OF THE HALLWAY BY 24 INCHES OR MORE, DETECTORS SHALL BE PLACED IN THE HALLWAY AND THE ADJACENT ROOM. DETECTORS SHALL SOUND AN ALARM AUDIBLE IN ALL SLEEPING AREAS OF THE DWELLING UNIT. THE REQUIRED DETECTORS SHALL RECEIVE THEIR POWER FROM THE BUILDING WIRING AND BE EQUIPPED WITH A BATTERY BACKUP. THE DETECTOR SHALL EMIT A SIGNAL WHEN THE BATTERIES

CARBON MONOXIDE ALARM

AN APPROVED CARBON MONOXIDE ALARM SHALL BE INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOM IN DWELLING UNITS AND ON EACH LEVEL OF THE DWELLING. SINGLE STATION CARBON MONOXIDE ALARMS SHALL BE LISTED AS COMPLYING WITH UL 2034 AND SHALL BE INSTALLED IN ACCORDANCE WITH THE IRCAND THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.

 $\mathbf{m}$ 

**METHOD HOMES** 

95 YESLER WAY

T. 206.789.5553


SEATTLE, WA 98104

SUITE 300

Description

**GENERAL NOTES** 

04.09.21 Drawn by

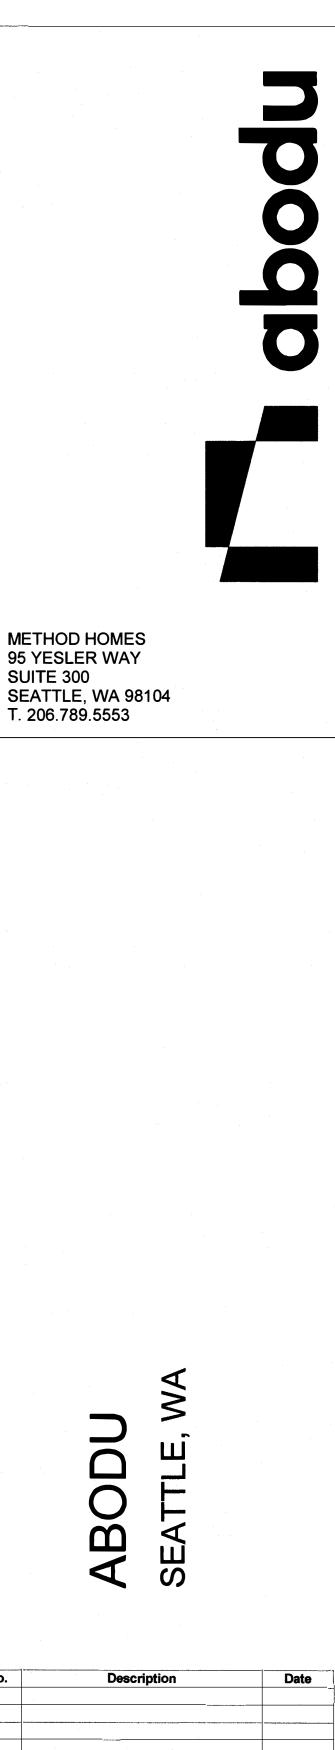

KEYN	NOTE SCHEDULE
ELECTRIC HEAT PUMP WATER HEATER, 50 GALLON, RATEOR INTERIOR USE. INSTALL AS PER MFR.	TED (10) WINDOW S WITH THE HEIGHT O
ELECTRICAL SUB-PANEL. 100 AMP MINIMUM. RATED FO	

EXTERIOR USE, INSTALL PANEL AS PER MFR.

CONDENSOR UNIT DAIKIN, H X W X D = 28 15/16 X 34 1/4 X 12 5/8"

INSULATED HOSE BIB WITH BACK FLOW PREVENTER, TYP.

LANDINGS (SITE BUILT BY OTHERS): MINIMUM WIDTH = WIDTH OF DOOR, DEPTH @ PATH OF TRAVEL = 36" MIN. WITH 2% MIN. SLOPE AWAY FROM STRUCTURE @ EXTERIOR, TYP.. U.N.O.

SHOWER: CERAMIC TILE W/ CURB. A NON-ABSORBENT SURFACE SHALL EXTEND NOT LESS THAN 72 INCHES ABOVE THE FLOOR IN THE SHOWER.

ALL SHOWERS AND TUB/SHOWER COMBINATIONS SHALL BE PROVIDED WITH INDIVIDUAL CONTROL VALVES OF THE THERMOSTATIC MIXING, PRESSURE BALANCE OR COMBINATION VALVE TYPE.

WALL MOUNTED MINI SPLIT, DAIKIN, H X W X D = 11 11/16" X 35 11/16 X 8 1/4". MOUNT ABOVE UPPER CABINETS. EXACT LOCATION AS PER OWNER AND CONTRACTOR, TYP., U.N.O.

BENCH, FULL LENGTH OF WALL. APPROXIMATE FINISH DIMENSIONS; 18" x 18". FINISH AS PER OWNER.

See elevations for trapezoid windows

Window note:

SILL: TOP OF BOTTOM WINDOW FRAME TO BE FLUSH TOP OF BENCH. (18" ABOVE FINISH FLOOR) FINISH OF BENCH ALSO AT 18" ABOVE FINISH FLOOR.

(10a.) WINDOW SILL: TOP OF BOTTOM WINDOW SILL TO BE 20" ABOVE FINISH FLOOR

MEDICINE CABINET, WIDTH TO FIT BETWEEN STUD BAY, EXACT STYLE AND HEIGHT AS PER OWNER, TYP.

(12.) WALL MOUNTED OR PEDESTAL SINK, 24" WIDE, EXACT STYLE AND HEIGHT AS PER OWNER, TYP.

(13.) NOT USED

ELECTRIC STOVE AND OVEN. CODE REQUIRES A 100 CFM EXHAUST FAN, EXACT STYLE AND MODEL FOR BOTH UNITS AS PER OWNER, TYP. VENT TO EXTERIOR THROUGH THE BATHROOM

(15.) BASE CABINETS WITH UPPER CABINETS. COUNTER AND CABINET STYLE AND HEIGHT AS PER OWNER, TYP.


(16.) APARTMENT SIZE REFRIGERATOR. EXACT STYLE AND COLOR AS PER OWNER, TYP.

(17.) BASE CABINETS WITHOUT UPPER CABINETS. COUNTER AND CABINET STYLE AND HEIGHT AS PER OWNER, TYP.

(18.) UNDER COUNTER VENTLESS WASHER & DRYER, EXACT MODEL AND COLOR AS PER OWNER, TYP.

SUITE 300 SEATTLE, WA 98104 T. 206.789.5553

Exhibit 7

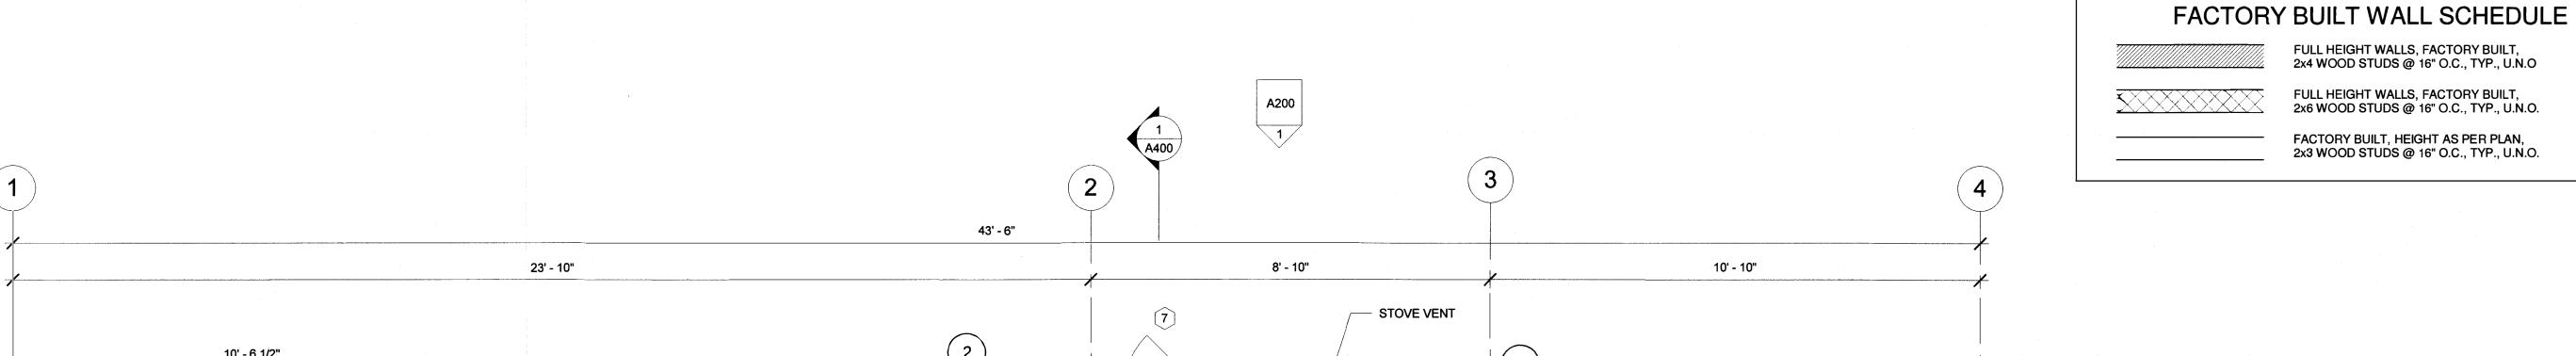

2 3

A200

(2) centered flat 8 ft ceiling **BATHROOM** (D-8) SEE A101 FOR DIMENSIONS AND WINDOWS (11) (12) OFFICE 1 OFFICE 2 LIVING ROOM 1 A801 (1G;) KITCHENETTE 2' - 4 1/2" 4' - 5 1/2" 2' - 6" (17) MARVIN BLACK

(D-1)

3' - 2"

LANDING

2

1

(5)

19' - 8 1/2"

1 FLOOR PLAN 1/2" = 1'-0"

# MOD NOTES

FLOORS: A = 14'-0" x 43'-6"

9 1/2" FLOOR JOISTS PER STRUCTURAL PLANS

SLOPED CEILING HEIGHTS FROM PER ELEVATIONS

2x12 ROOF RAFTERS AS PER STRUCTURAL PLANS SPACED AT 24" O.C. WITH NO

SL STATE LABEL

2 Prewn by Checked by


A100

FLOOR PLAN

As indicat

04.09.21

ABODU

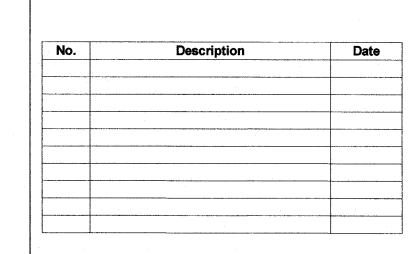


FOUNDATION PLAN

Drawn by Checked by


A02

04.09.21

1/2" = 1'-6

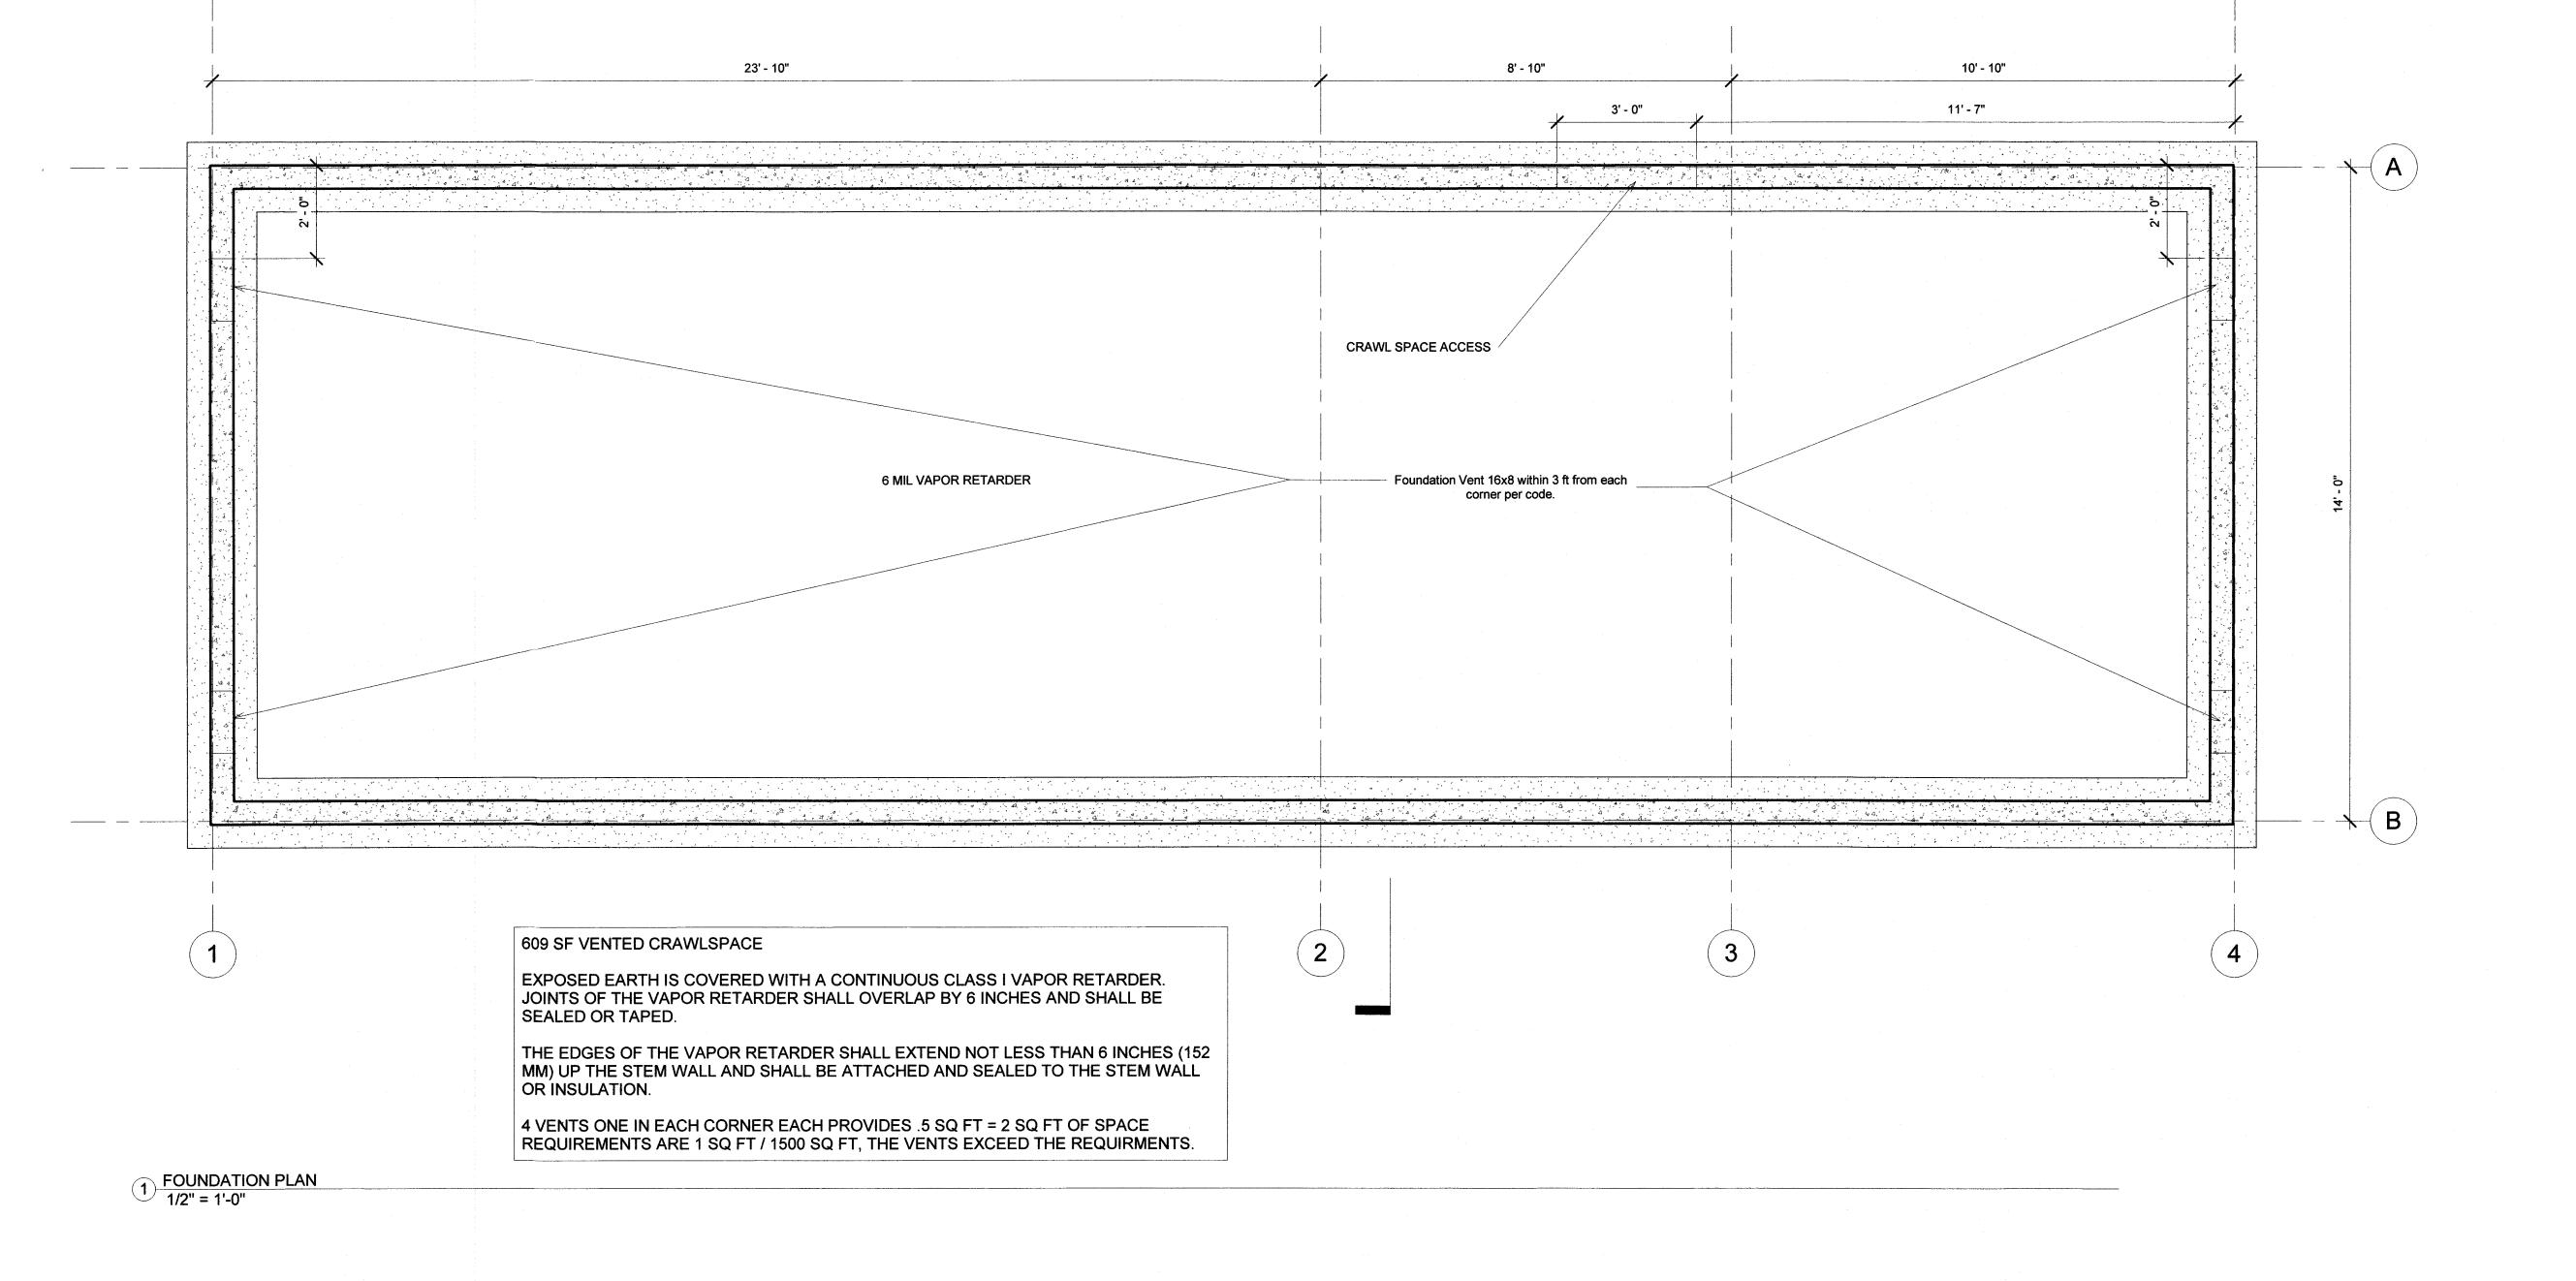

43' - 6"

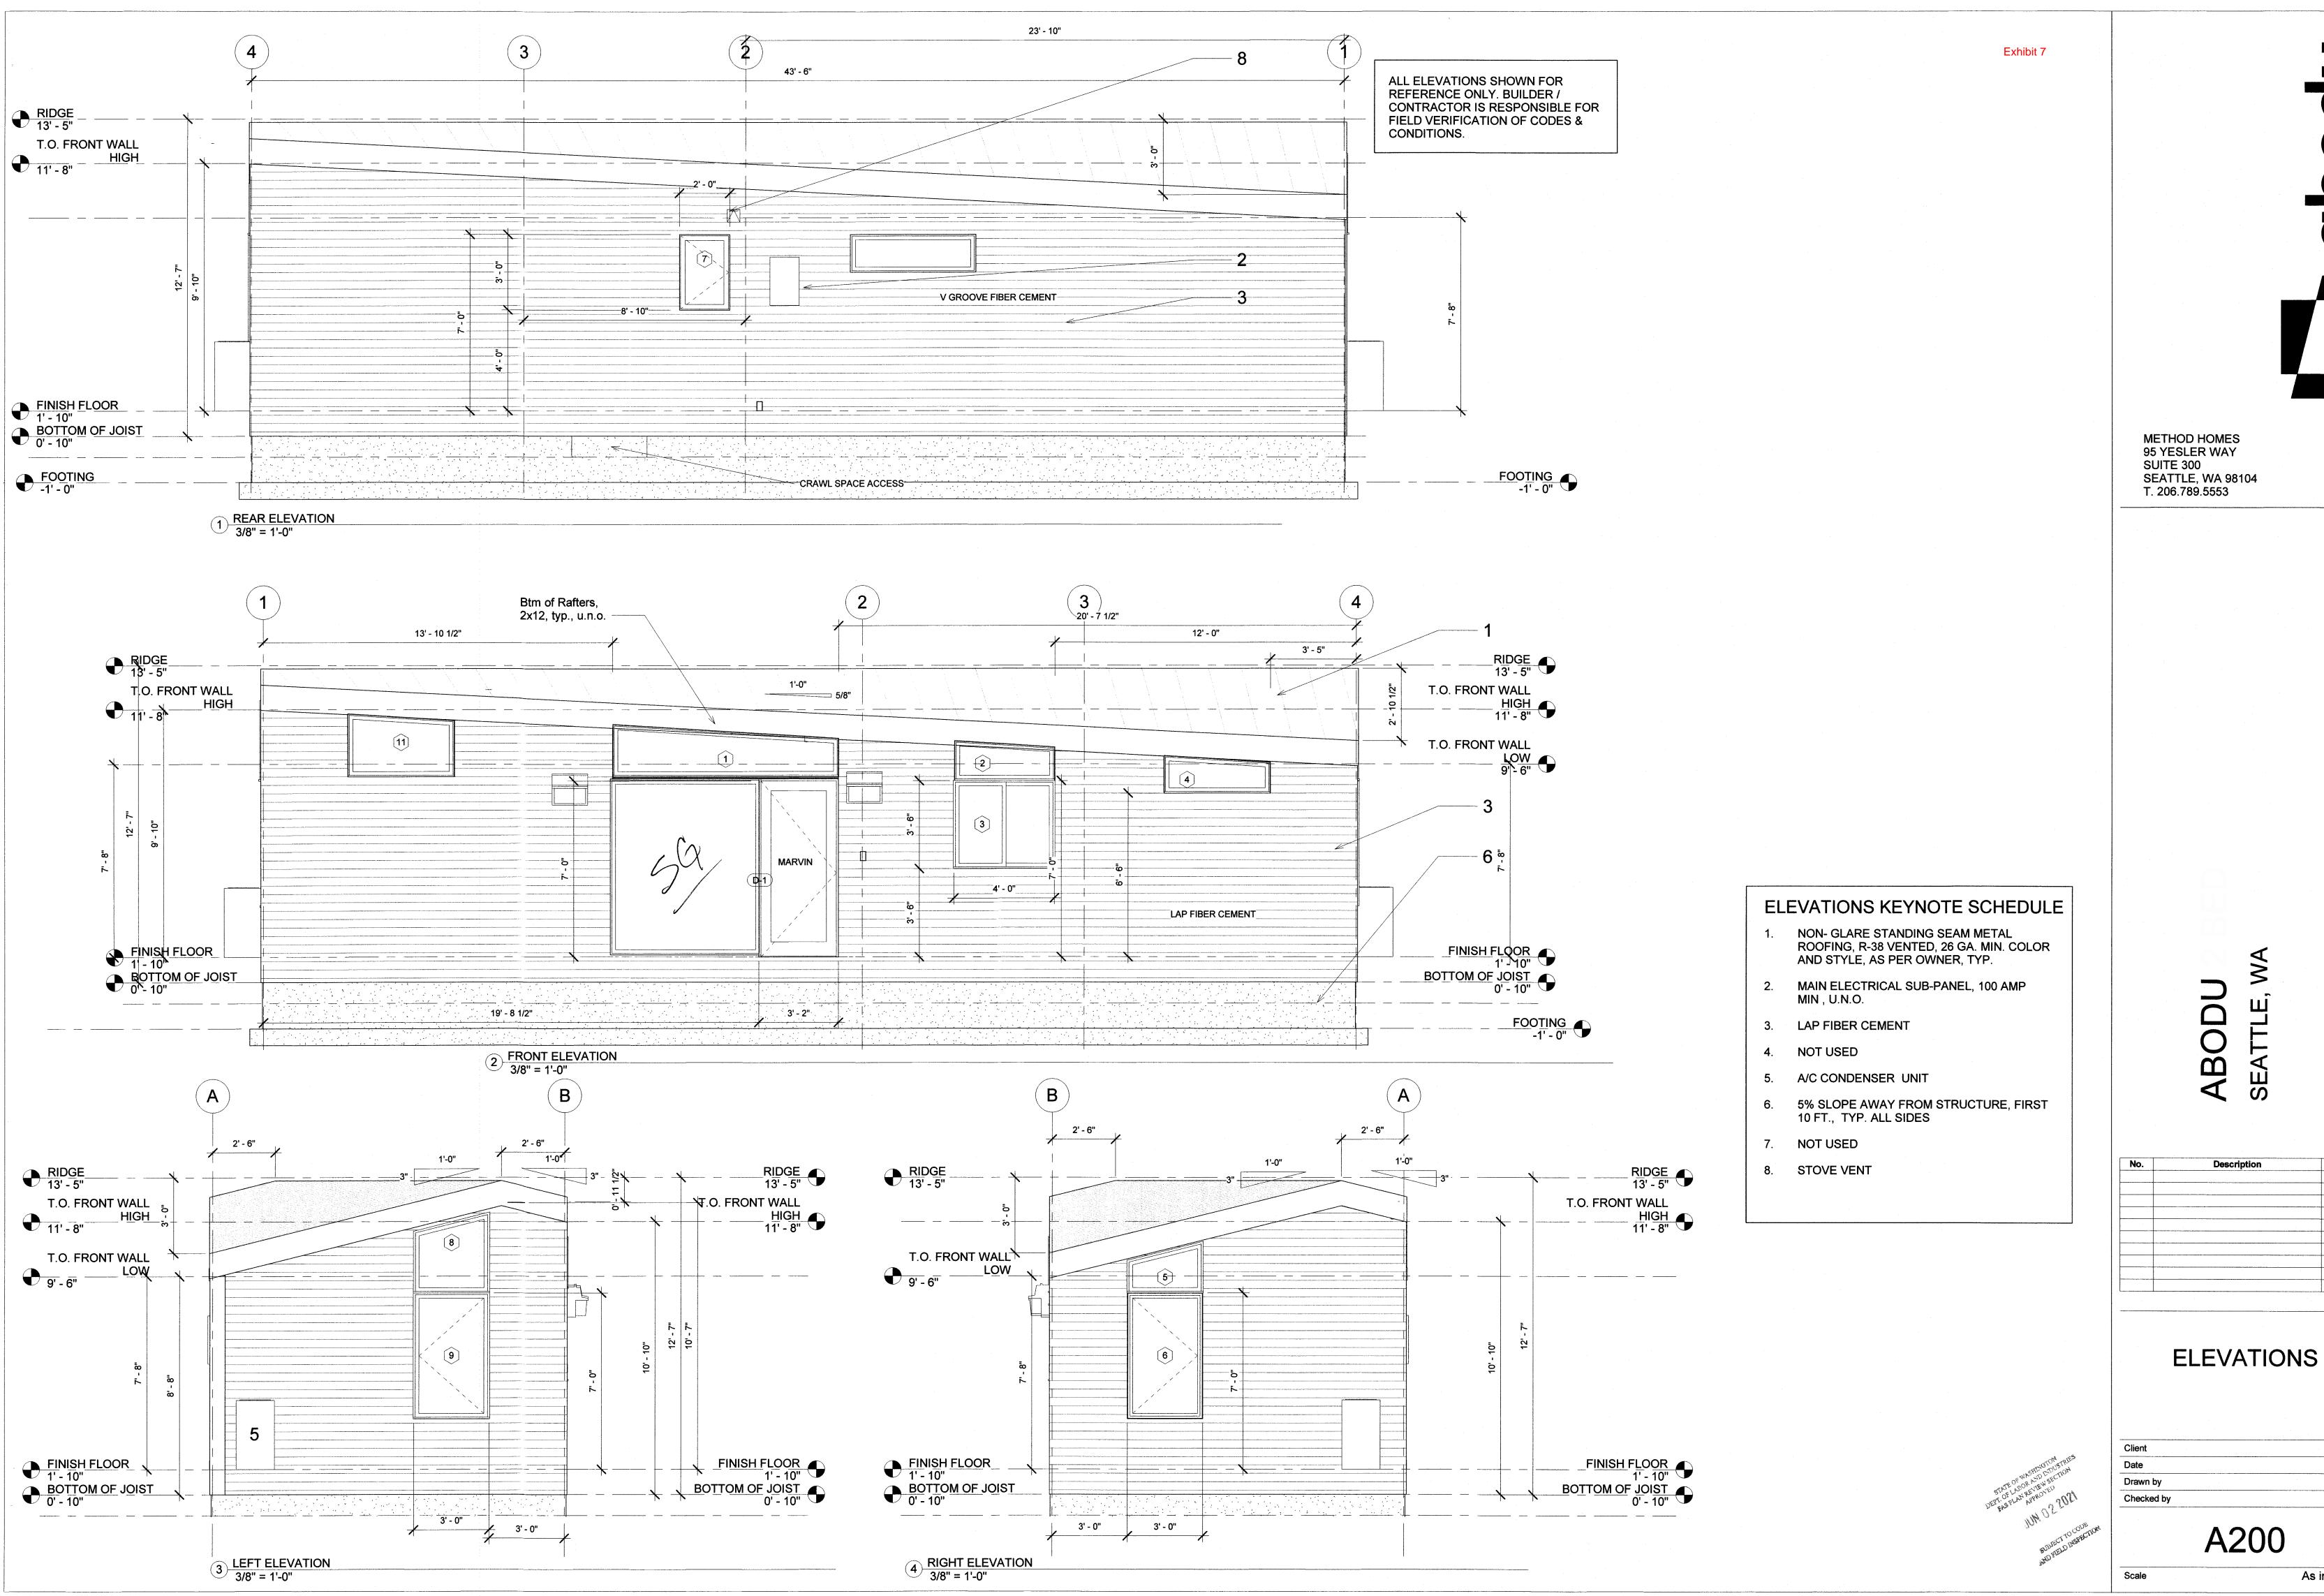

04.09.21

As indicat 57

> ABODU SFATTIF WA

No. Description Date

ROOF

Client

Date 04.09.21

Drawn by

Checked by


A300

1.

STATE OF WASHINGTON
STATE OF WASHINGTON
DEPT. OF LANGE AND PROVED

JUN 02200

SURVEY TO A

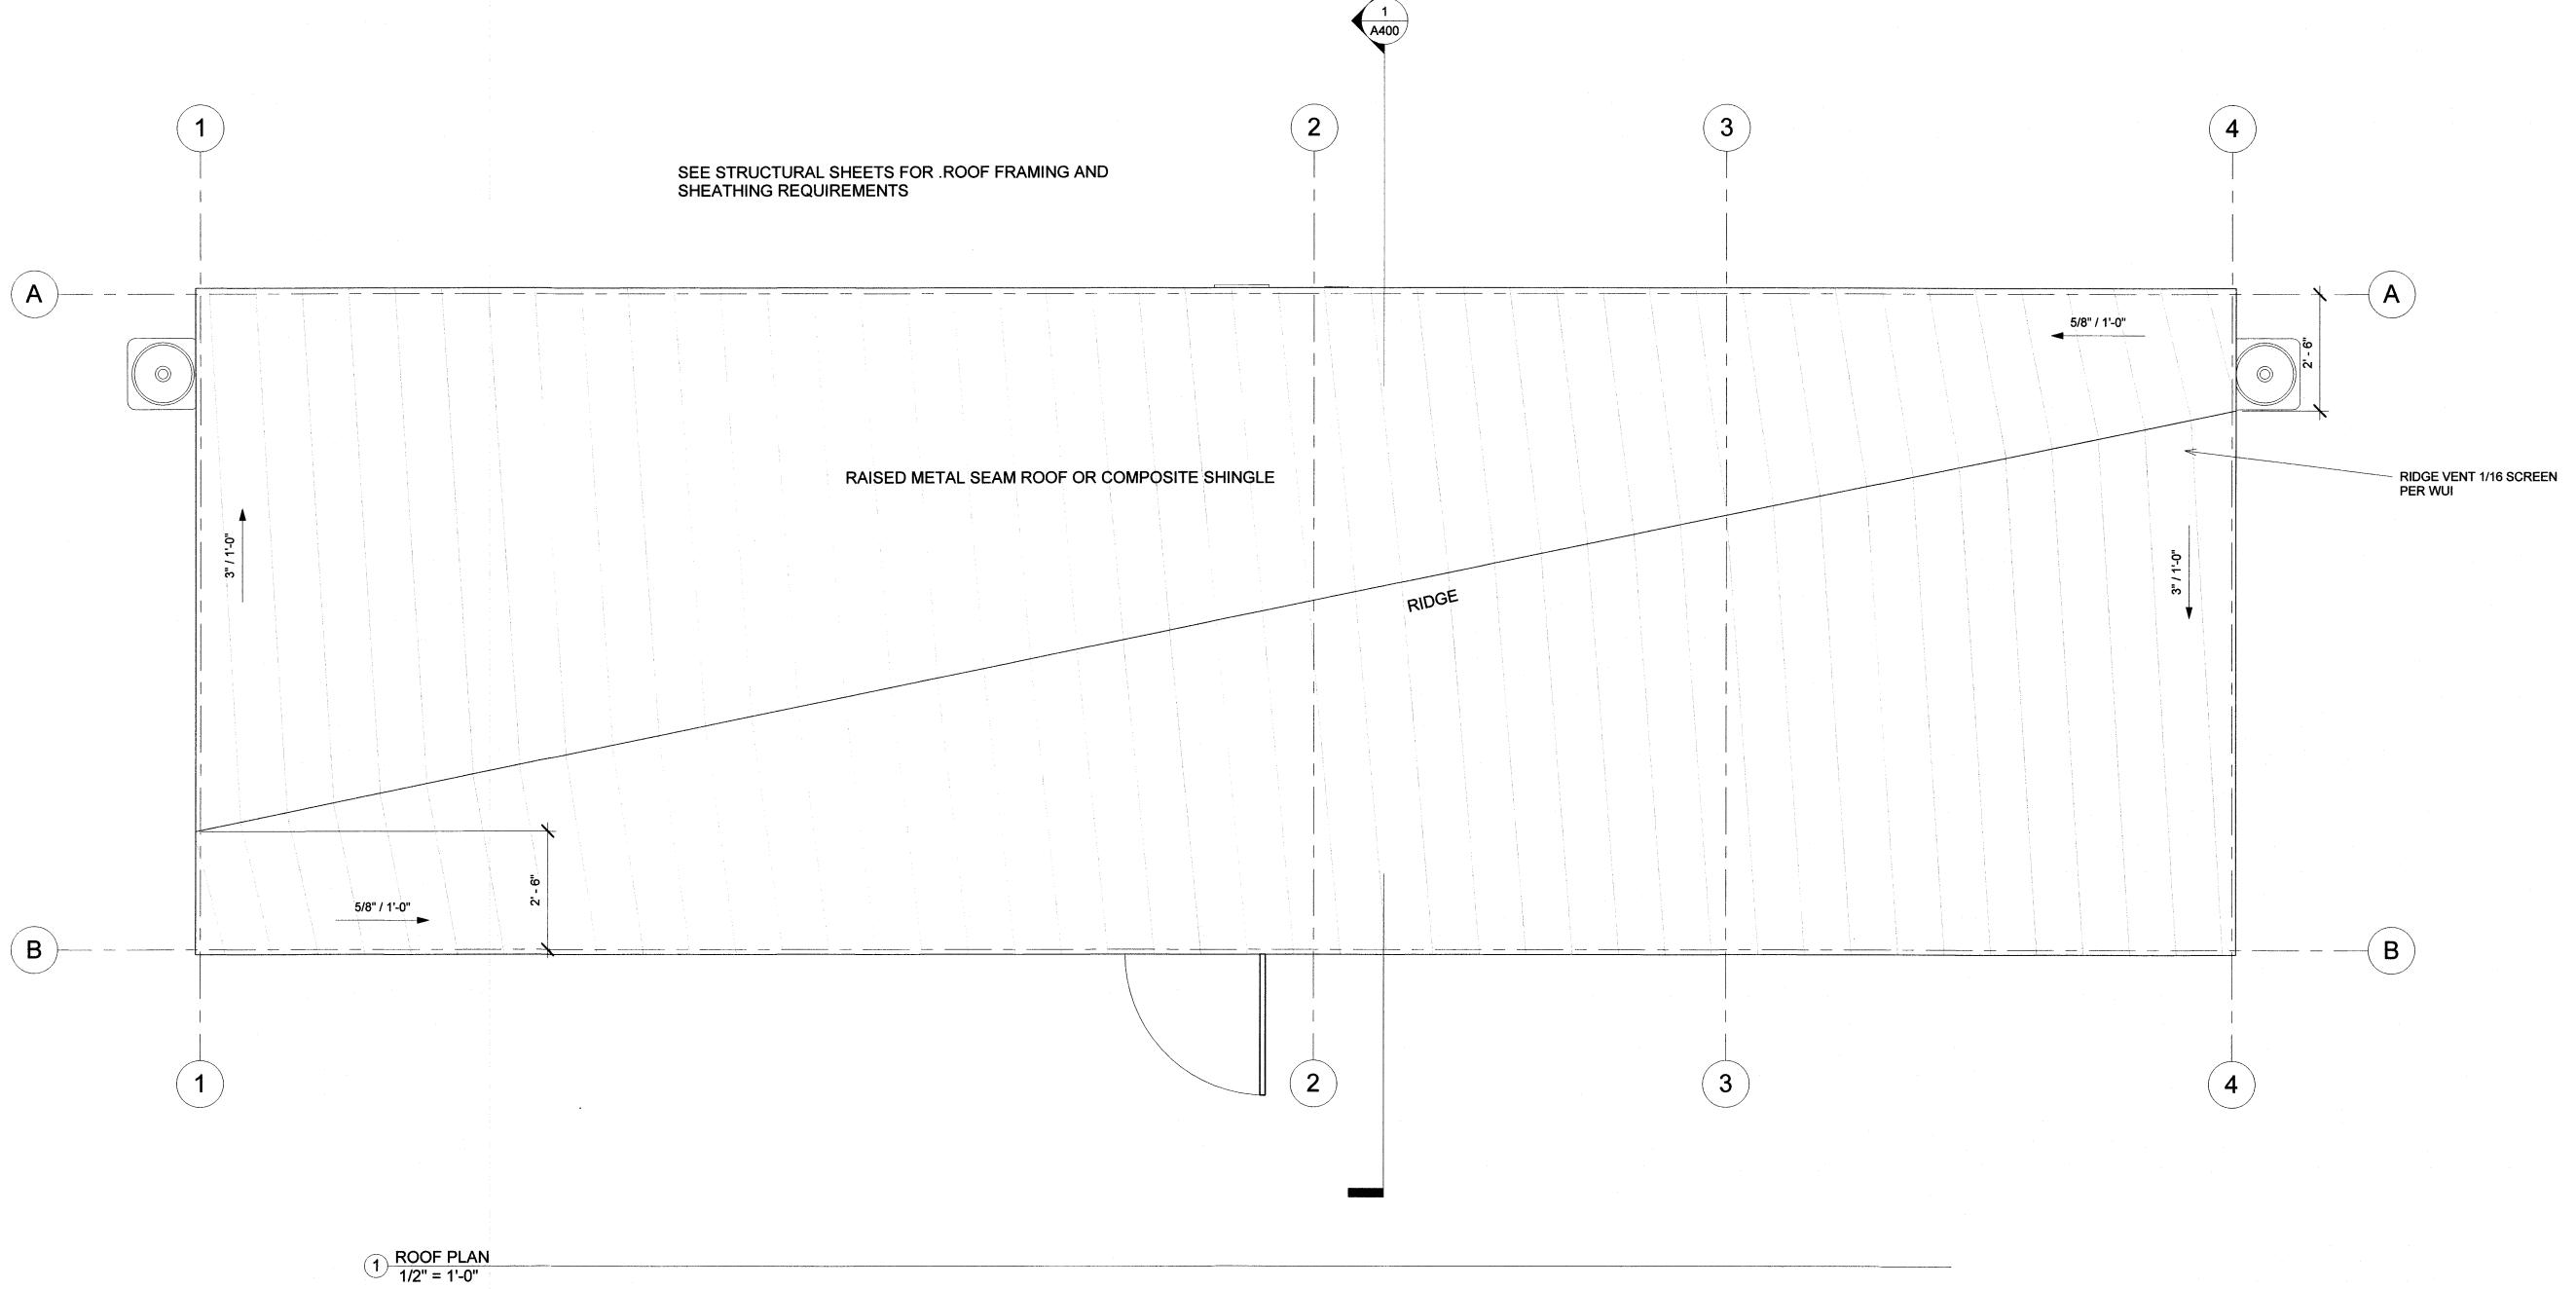


ABODU

No.	Description	Date
	-	

**SECTION VIEW** 

04.09.21 Drawn by Checked by

A400 Scale

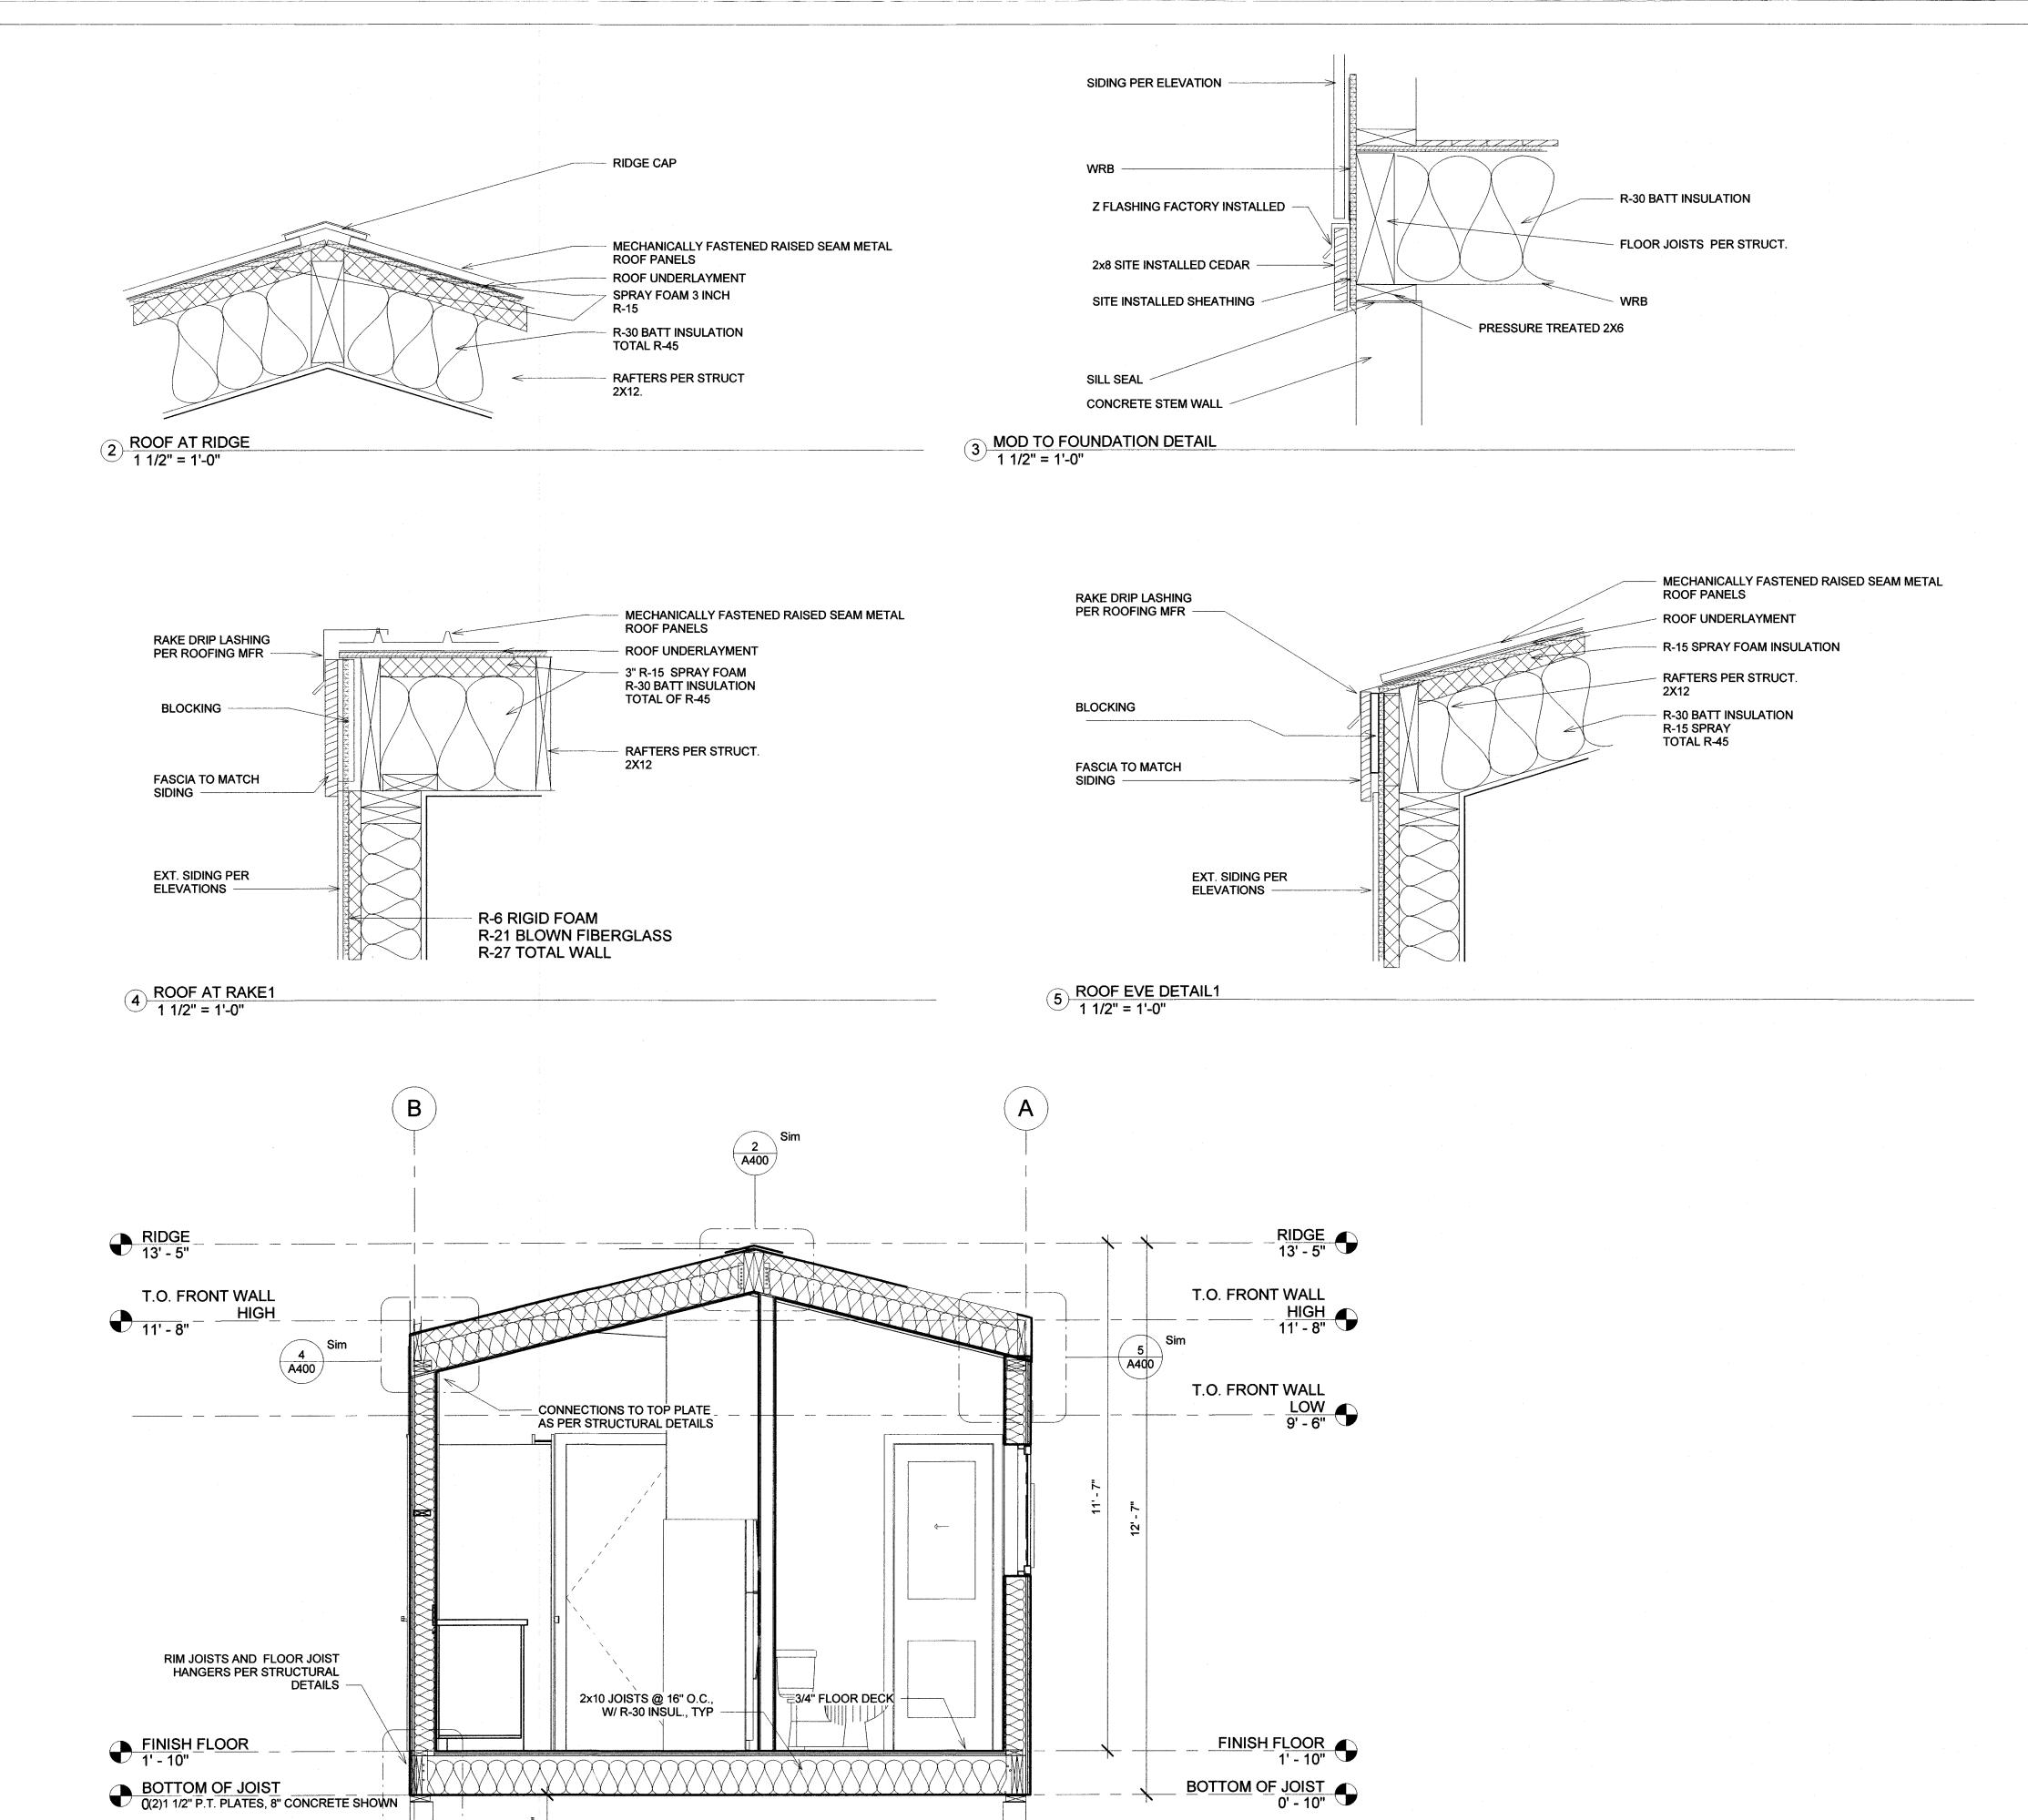

1 Section 1 1/2" = 1'-0"

FOUNDATION (ON SITE) BY BUILDER W/6 MIL VAPOR BARRIER SEE FOUNDATION PLAN

As indicat 59

7	<b>3</b>
(	<b>5</b>

# ABODU SEATTLE, W

No.	Description	Date	
		*	
		<del>_</del> -	
		-	

# WINDOW AND DOOR SCHEDULE

A600

04.09.21

ENTRY MARVIN 3' - 0" 7' - 0" OFFICE 2' - 0" 7' - 0" 7' - 0'' CLOSET 7' - 0" 7' - 0" BATHROOM 2' - 4" 7' - 0'' 7' - 0" 7' - 0" OFFICE 2 BATHROOM 2' - 4" 7' - 0'' 7' - 0" CLOSET LIVING ROOM 2' - 0" 7' - 0'' 7' - 0'' CLOSET OFFICE 2 2' - 0" 7' - 0" 2' - 2" CLOSET OFFICE 2 7' - 0" 7' - 0" ALL WINDOW AND DOORS TO 0.3 MIN U VALUE, AND 0.19 SHGC PER ENERGY CODE. WINDOW AND DOOR TO UTILIZE NATURAL LIGHT AND VENTILATION AS REQUIRED BY STATE AND LOCAL CODE.

Height

Width

LOCATION

Mark

Door Schedule

Mat.

Height

Note

Window Schedule								
Mark	Location	Width	Height	Sill Height	Material	U Value	Family and Type	
1	LIVING	9' - 0"	1' - 11"	7' - 2"		0.3	Fixed_Window_with_TrimAngle_top _7307: 9' x 1' 8"	
1a	LIVING	6' - 0"	7' - 0"	0' - 1"	Tem/SG	0.3	Fixed: 72" x 84"	
2	KITCHEN	4' - 0"	1' - 5"	7' - 0"	The state of the s	0.3	Fixed_Window_with_TrimAngle_top _7307: 4' x 1' 6"	
3	KITCHEN	4' - 0"	3' - 6"	3' - 6"	TEMP	0.3	Slider with Trim: 48" X 42"	
4	OFFICE 1	4' - 3"	1' - 4"	6' - 6"		0.3	Fixed_Window_with_TrimAngle_top _7307: 5' 0" x 1' 3"	
5	OFFICE 2	3' - 0"	1' - 9 17/32"	7' - 0"		0.3	Fixed_Window_with_TrimAngle_top _7307: 36" x 21.5"	
6	OFFICE EGRESS	3' - 0"	5' - 0"	2' - 0"		0.3	Casement with Trim: 36" x 60"	
7	BATHROOM	2' - 0''	3' - 0"	4' - 0"	TEMP	0.3	Window-Casement-Single_Left: 24" x 36"	
8	OFFICE2	3' - 0"	2' - 11 1/16"	7' - 0"		0.3	Fixed_Window_with_TrimAngle_top _7307: 36" x 36"	
9	OFFICE 2 EGRESS	3' - 0"	5' - 0"	2' - 0"	TEMP	0.3	Casement with Trim: 36" x 60"	
10	LIVING	5' - 0"	1' - 6"	5' - 6"		0.3	Fixed: 60" x 18"	
11	OFFICE	4' - 3"	2' - 4"	7' - 2"		0.3	Fixed_Window_with_TrimAngle_top _7307: 5' 0" x 1' 3" guest bed	

P PENDANT WEATHER PROOF OUTLET

J BOX

OUTLET

EXTERIOR LIGHT

CARBON MONOXIDE SMOKE DETECTOR

LIGHT AND FAN COMBO

17' - 0 1/2"

0' - 3 1/2"

**D-2** 

TO GARBAGE DISPOSAL

Dropped Ceiling in Bath, Ceiling Height @ 8'-2" See Structural Plans

OFFICE 1

10' - 6"

19 - FAN RATED J BOX

100 amp Exterior Rated Panel \_ with SPD Type 1

LIVING ROOM

FAN RATED J BOX

1

35' - 10"

19

23' - 6 1/2"

20 🔿~

OFFICE 2

14' - 0"

19

98

1 ELECTRIC PLAN 1/2" = 1'-0"

14, 16 with disconnect

per code

B

17

WP GFI

0' - 3 1/2"

20 wp

43' - 6"\_\_\_

FAN AND LIGHT

8' - 10"

TO D.W.

KITCHEN

ABODU


Description

**ELECTRIC PLAN** 

5.8.20 Drawn by Checked by

E1.1

1/2" = 1'

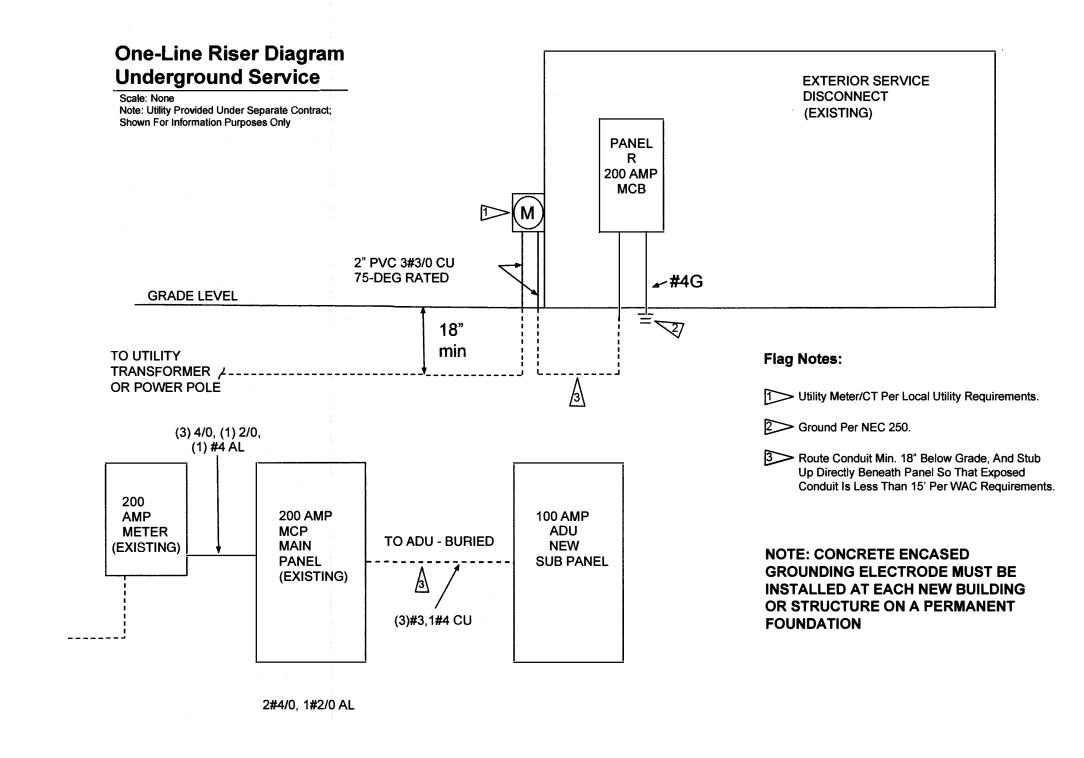

NOTE: SURGE PROTECTION DEVICE REQUIRED PER NEC 230.67

		Abodu 2bed Sub	Panel Schedule		
		Main Circuit Br			
50 amps 240v GFCI	1	Range	Washer/Dryer combo	2	15 amps 240v GFCI
20amps 120v		Kitchen sm app	General		15amps 120v
AFCI/GFCI	5	Α	lights	6	AFCI
20amps 120v		Kitchen sm app			
AFCI/GFCI	7	В	B Water Heater Dishwasher		30 amps 240v
20amps 120v		Dishwasher			GFCI
AFCI/GFCI	9			10	
20amps 120v		Disposal	Bathroom Lights/		20amps 120v
AFCI/GFCI	11		Recepatcles	12	AFCI/GFCI
20 amps 120v		Refrigerator			
AFCI/GFCI	13		Heat Pump	14	25amps 240v
15 amps 120v		Vent Hood	ricat i ump		GFCI
AFCI/GFCI	15			16	
15 amps 120v		General	Smoke/CO		15 amps 120v
AFCI/GFCI	17	Receptacles		18	AFCI/GFCI
15 amps 120v		Office Lights/	Exterior Lights/		15 amps 120v
AFCI/GFCI	19	Receptacles	Receptacles	20	AFCI/GFCI

ABODU 2 BED LOAD CALCULATION ITEM TOTAL LOAD | QIY | MULTIPLIER GENERAL LIGHTING 609 SQ FT 3 VA 1827 VA SMALL APPLIANCE 1500 VA 3000 VA 1500 VA LAUNDRY 1500 VA DISHWASHER 1200 VA 1200 VA DRYER 5000 VA 5000 VA WATER HEATER 1500 VA 1500 VA VENT HOOD 530 VA 530 VA 9600 VA RANGE 9600 VA DISPOSAL 985 VA 985 VA

NEC 220.82 TOTAL 25142 VA

FIRST 10 KW @ 100% 10000 VA
REMAINDER @ 40% 15142 6056.8 VA
SUB TOTAL 16056.8 VA

0 VA

VA

FIXED LOADS
ELECTRIC HEAT
HEAT PUMP

5000 VA

100%

TOTAL:

87.74 AMPS

SERVICE INSTALLED 100 AMP SERVICE FEEDERS (3) #3CU (1) #4CU

It shall be the responsibility of the General Contractor and all subcontractors who are bidding and participating in the work to review all sheets of the Construction Documents and to become familiar with all phases of the proposed project.

The General Contractor and all subcontractors shall provide adequate protection in and around the project. The General Contractor shall bear all expense for repair or replacement of damaged work caused by a subcontractor that failed to protect another trades work.

MANUFACTURER



95 YESLER WAY SUITE 300 SEATTLE, WA 98104 206.789.5553 info@methodhomes.net

MODEL

**PROJECT** 

ABODU FBH <sup>1</sup> Seattle, WA 98104

SHEET TITLE

ELECTRICAL DETAILS

REVISIONS	:			
		· · · · · · · · · · · · · · · · · · ·		
			***************************************	
				-
			· · · · · · · · · · · · · · · · · · ·	

PROJECT INFORMATION:

OFFICE PROJECT NO.

REVIEWED BY:

DRAWN BY:

MH

SCALE:

AS NOTED

E3.0

STATE OF WASHINGTON STRIKE OF WASHINGTON WASHINGTON

### TYPICAL PLUMBING NOTES


- 1. WATER SUPPLY LINES ARE 1" U.N.O.
- 2. NO HORIZONTAL DRY VENTS.
- 3. NO D.F.U. LOADING.
- 4. AIR ADMITTANCE VALVES NOT ALLOWED.
- 5. ANTI-SCALD DEVICES PER UPC & LOCAL CODES.
- 6. FIXTURE SHUT-OFFS PER UPC & LOCAL CODES.
- 7. HORIZONTAL SLOPE MIN. 1/4" PER UPC & LOCAL CODES.
- 8. SCHEDULE 40 BLACK IRON PIPE FOR ALL GAS/PROPANE
- 9. COPPER / PEX PIPING FOR WATER SUPPLY LINES.
- 10. ABS FOR VENTING / DRAIN LINES.
- 11. R3 HOT WATER PIPE INSULATION MUST BE USED IN CONDITIONED SPACES AND R3 AT ALL WATER LINES IN UNCONDITIONED SPACES.
- 12. CLEANOUTS AT ALL BRANCHES OVER 5 FT. IN LENGTH, KITCHEN SINK, UPPER TERMINAL, AND CHANGES IN **DIRECTION OVER 135 DEGREES.**
- 13. TOILET IS NOT AN APPROVED CLEANOUT.
- 14. CLOTHES WASHER TRAP SHALL BE BETWEEN 6 AND 18 INCHES ABOVE THE FLOOR. THE STANDARD RECEPTOR SHALL BE BETWEEN 18 AND 30 INCHES ABOVE ITS
- 15. NO PEX WITHIN 18 INCHES OF HOT WATER HEATER.
- 16. INSTALL WATER HAMMER ARRESTORS AS CLOSE TO QUICK-ACTING VALVES AS POSSIBLE.
- 17. WATER PIPING TO BE INSTALLED TO ACCOUNT FOR ALL PRESSURE DROP IN SYSTEM PER UPC & LOCAL CODES.
- 18. WATER SUPPLY SYSTEM MAINS AND BRANCHES SHALL BE PROPERLY SIZED TO DELIVER ADEQUATE WATER PRESSURE AND VOLUME PER LOCAL CODES, AND TO MINIMIZE FRICTION GENERATED NOISE. NO 1/2" I.D. PIPING SHALL BE INSTALLED IN WALLS OR CEILING ADJACENT TO LIVING OR SLEEPING AREAS. PIPING SHALL BE SIZED SO THAT FLOW VELOCITIES DO NOT EXCEED 6'/SECOND.
- 19. HORIZONTAL DRAINAGE PIPE SLOPE TO BE INSTALLED IN UNIFORM ALIGNMENT AT UNIFORM SLOPES NOT LESS THAT 1/4" SLOPE PER 1 FOOT PER UPC & LOCAL
- 20. ENSURE PROPER VENTING AT KITCHEN SINK (IF PROVIDED).

# MINIMUM DESIGN PRESSURES **DOMESTIC WATER SERVICE:** HOLD 50 PSI FOR 15 MINUTES DOMESTIC WASTE VENT: WATER TEST: 10' HEAD FOR 15 MINUTES **ON-SITE PRESSURES** DOMESTIC WATER SERVICE: MAXIMUM WATER PRESSURE TO BE 80 PSI. IF PRESSURE IS ABOVE THE MAXIMUM, A REGULATOR MUST BE INSTALLED PER UPC & LOCAL CODES.

LOAD CALCULATION							
PROJECT	COUNT F	IXTURE TYPE	<u>UNITS</u>	PROJECT TOTAL			
0	E	BAR SINK	1	0			
0	E	BATHTUB/COMBINATION	10	0			
1	(	CLOTHES WASHER	4	4			
1	. [	DISHWASHER	1.5	1.5			
2	. 1	IOSE BIB	2.5	5			
1	· H	KITCHEN SINK	1.5	1.5			
0	L	AUNDRY / UTILITY SINK	1.5	0			
1	L	AVATORY WASH BASIN	1	. <b>1</b> .			
1	5	SHOWER STALL	2	2			
1	\\	VATER CLOSET	3	3			
TOTAL: 8				18			
CALCULATED TOTAL DEVELOPED LENGTH IS: 60'							

	FIXT	URE CO	<b>NECTIO</b>	N		
DECODIDATION	MIN BRANCH SIZE				TDAD	COMMENTO
DESCRIPTION	W	V	CW	HW	TRAP	COMMENTS
WATER CLOSET	3"	2"	1/2"		3"	1
KITCHEN/LAUNDRY SINK	2"	1-1/2"	1/2"	1/2"	1-1/2"	5
TUB/SHOWER COMBO	2"	1-1/2"	3/4"	3/4"	1-1/2"	2, 3
BATH TUB ONLY	2"	1-1/2"	3/4"	3/4"	1-1/2"	
LAVATORY	1-1/2"	1-1/2"	1/2"	1/2"	1-1/2"	4
CLOTHES WASHER	2"	1-1/2"	3/4"	3/4"	2"	
SHOWER	2"	1-1/2"	3/4"	3/4"	2"	2
DISHWASHER			1/2"			6

- 1. DUAL-FLUSH EQUAL TO OR LESS THAN 1.28 GALLON PER FLUSH.
- INDIVIDUAL CONTROL VALVES OF THE PRESSURE BALANCE OR THERMOSTATIC VALVE TYPE SHALL BE PROVIDED.
- 3. SHOWER HEADS NOT TO EXCEED 1.75 GPM @ 60 PSI
- 4. LAVATORY FAUCETS NOT TO EXCEED 1.0 GPM @ 60 PSI
- KITCHEN FAUCETS NOT TO EXCEED 1.75 GPM @ 60 PSI
- 6. FOR DISHWASHER WASTE CONNECT MANUFACTURER SUPPLIED DRAIN LINE TO GARBAGE DISPOSAL INLET. VERIFY SUPPLY LINE REQUIREMENTS WITH MANUFACTURER'S SPECIFICATIONS.

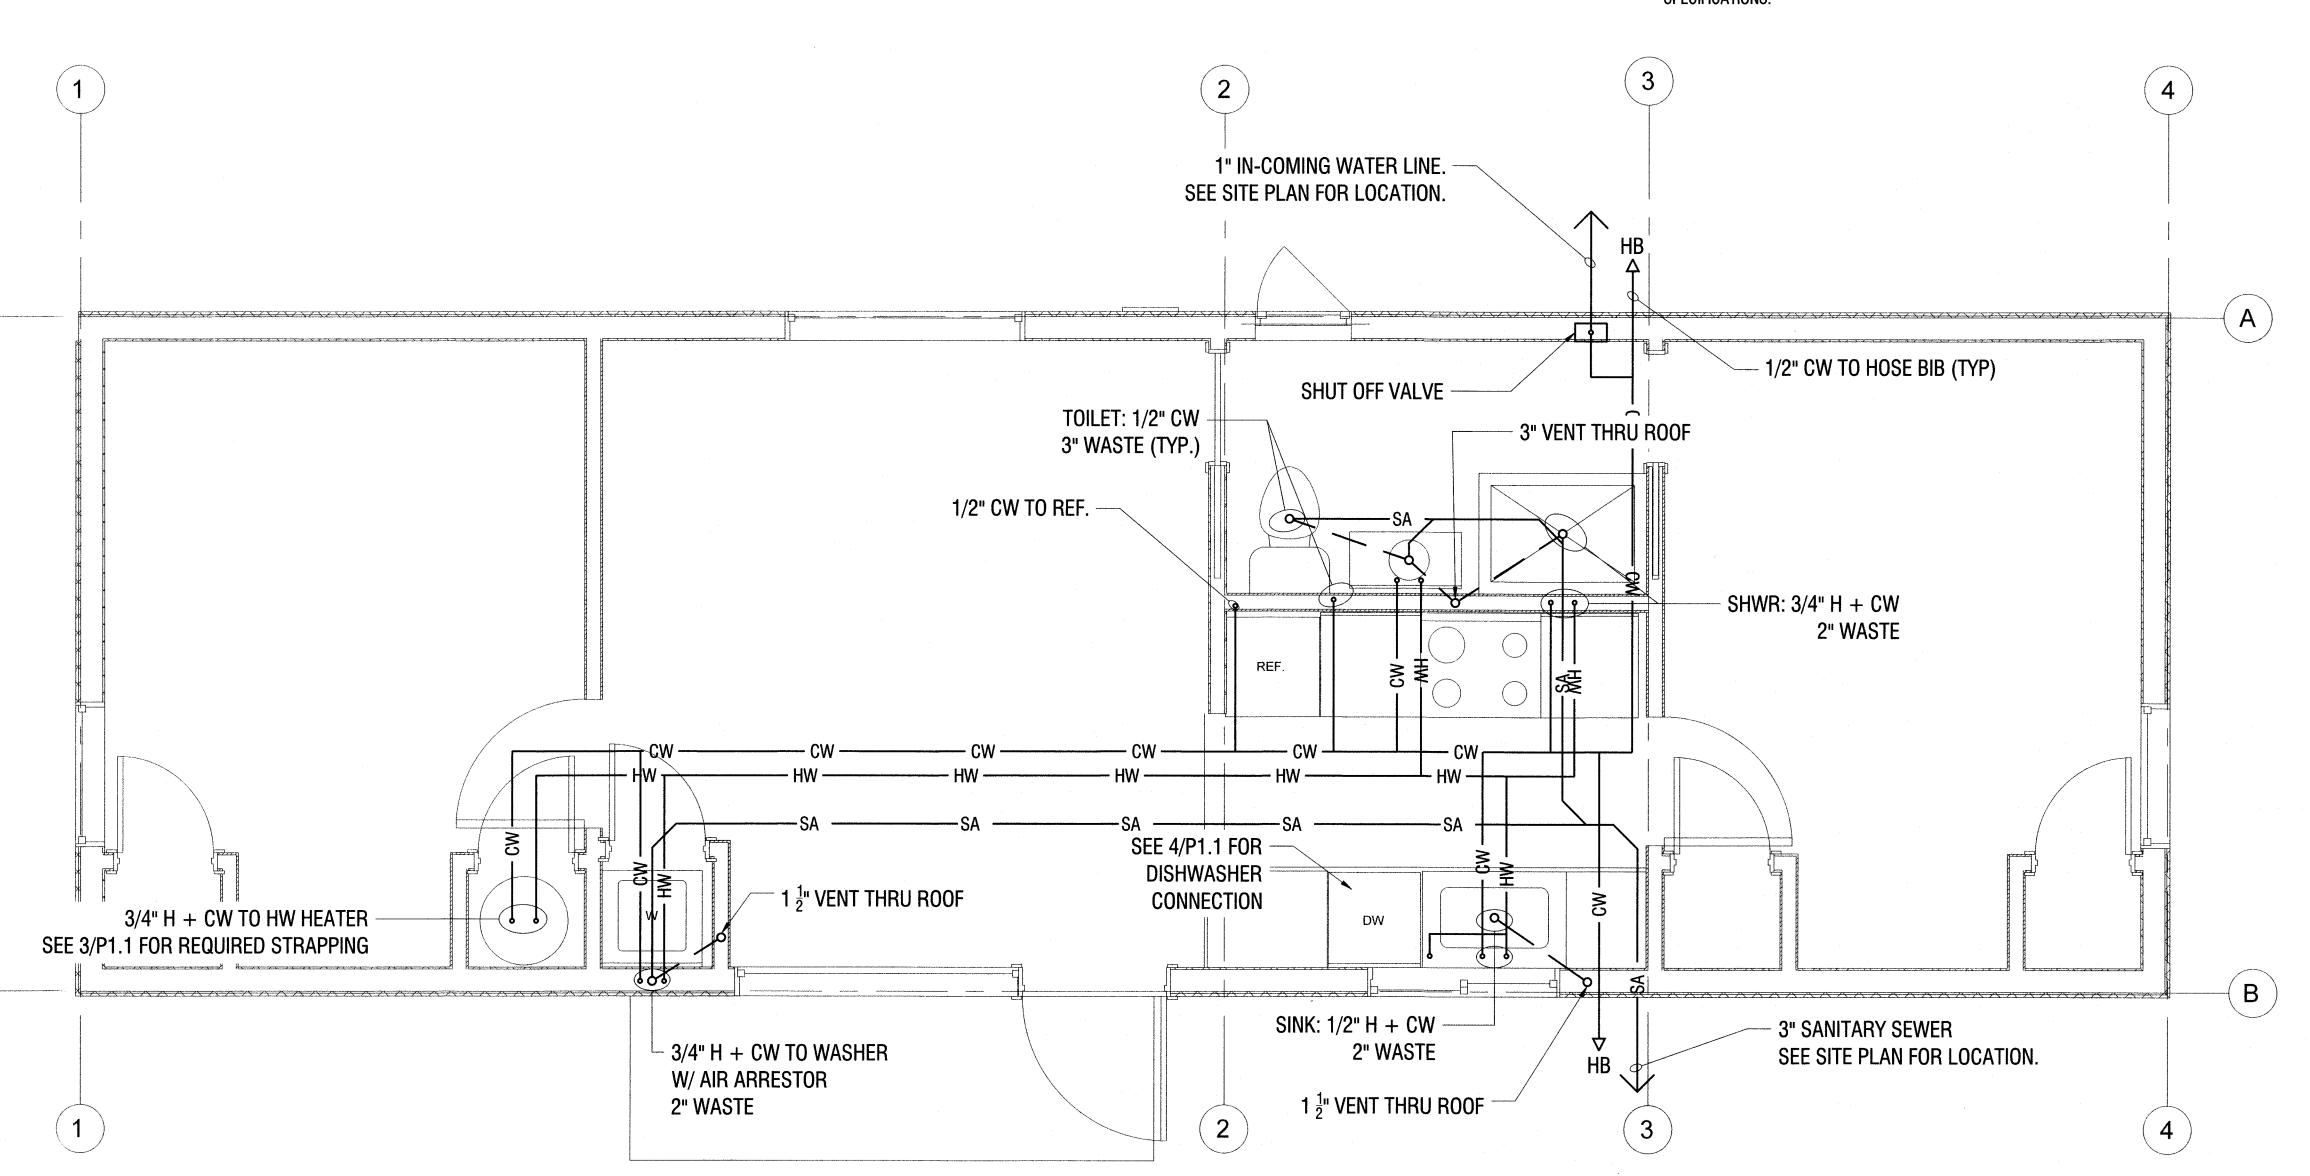

# PLUMBING LAYOUT MAIN LEVEL

1/2"=1'-0"

It shall be the responsibility of the General Contractor and all subcontractors who are bidding and participating in the work to review all sheets of the Construction Documents and to become familiar with all phases of the proposed project.

The General Contractor and all subcontractors shall provide adequate protection in and around the project. The General Contractor shall bear all expense for repair or replacement of damaged work caused by a subcontractor that failed to protect another trades work.

MANUFACTURER



2921 EASTLAKE AVE E SEATTLE, WA 98102 206.789.5553 info@methodhomes.net

MODEL

**PROJECT** 

ABODU :

SHEET TITLE

PLUMBING LAYOUT


REVISIONS:								
	:						•	

PROJECT INFORMATION:		
OFFICE PROJECT NO.		·
REVIEWED BY:		

P1.0


### WATER HEATER STRAPPING

NOT TO SCALE

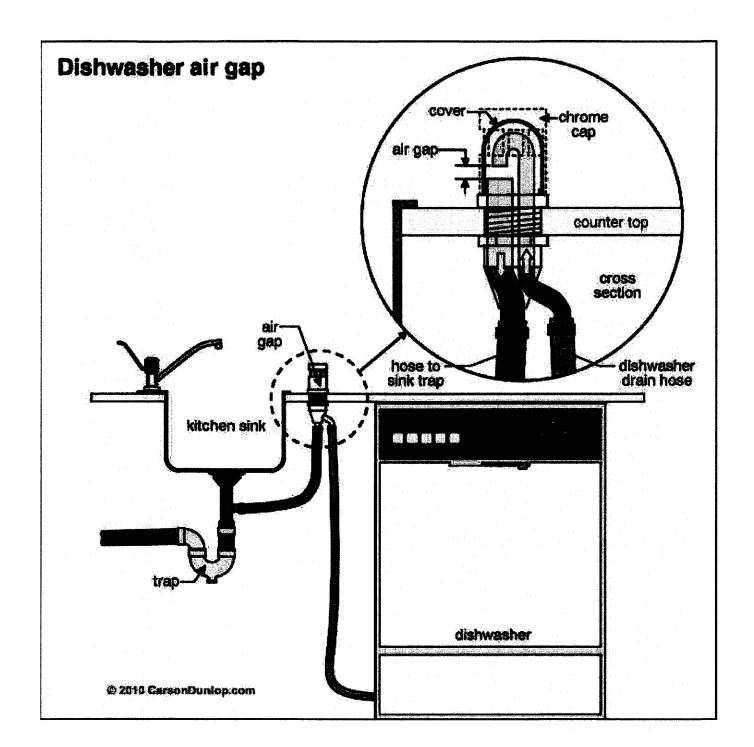


### DISHWASHER CONNETCTION

NOT TO SCALE

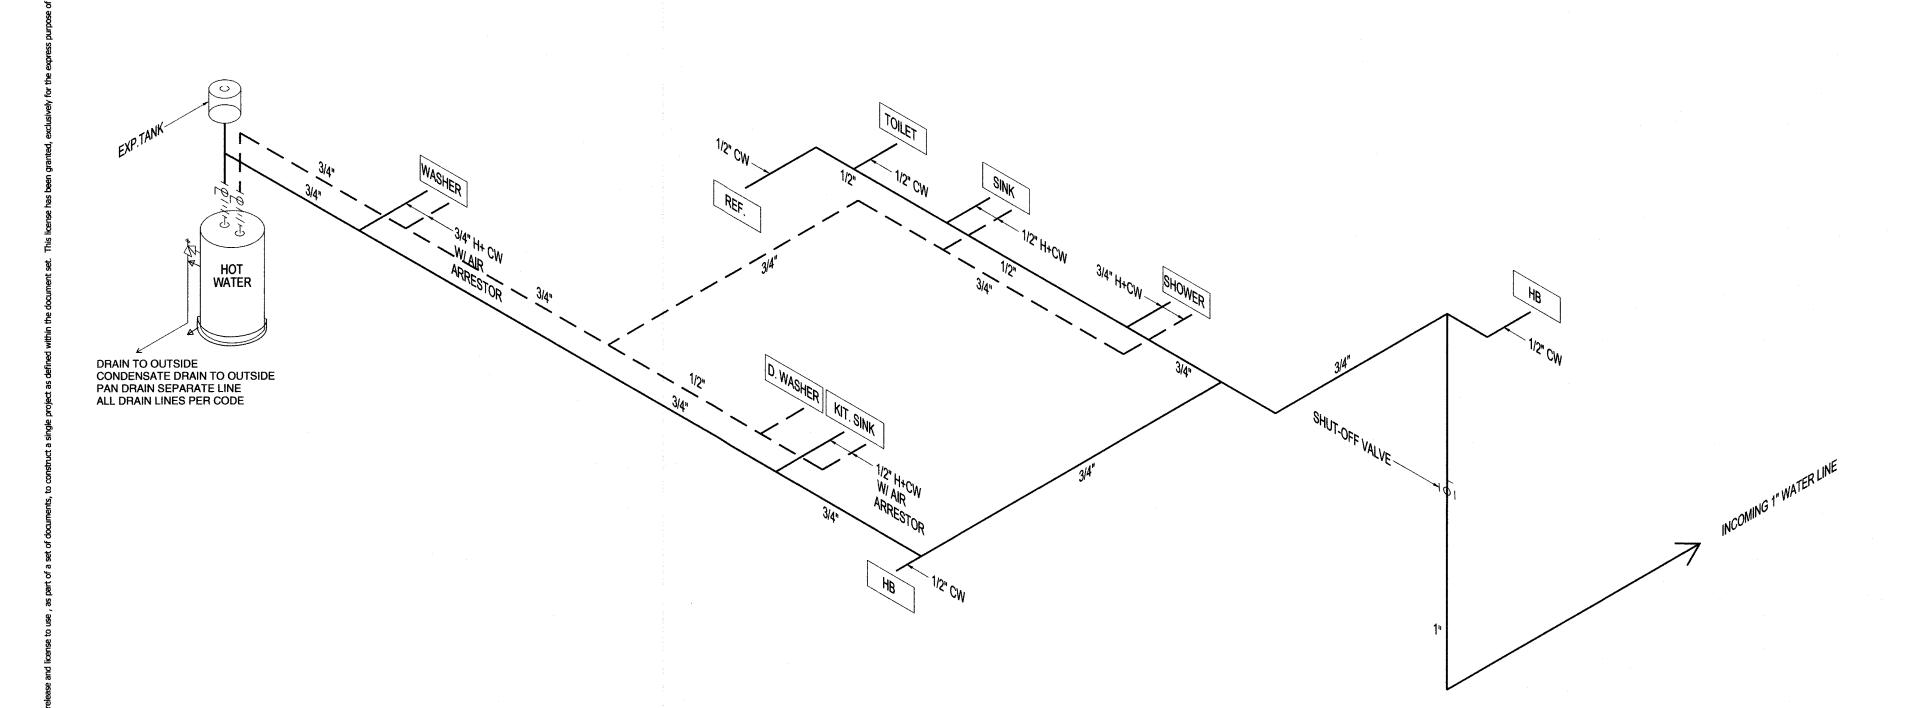

# DOMESTIC WATER RISER DIAGRAM

NOT TO SCALE

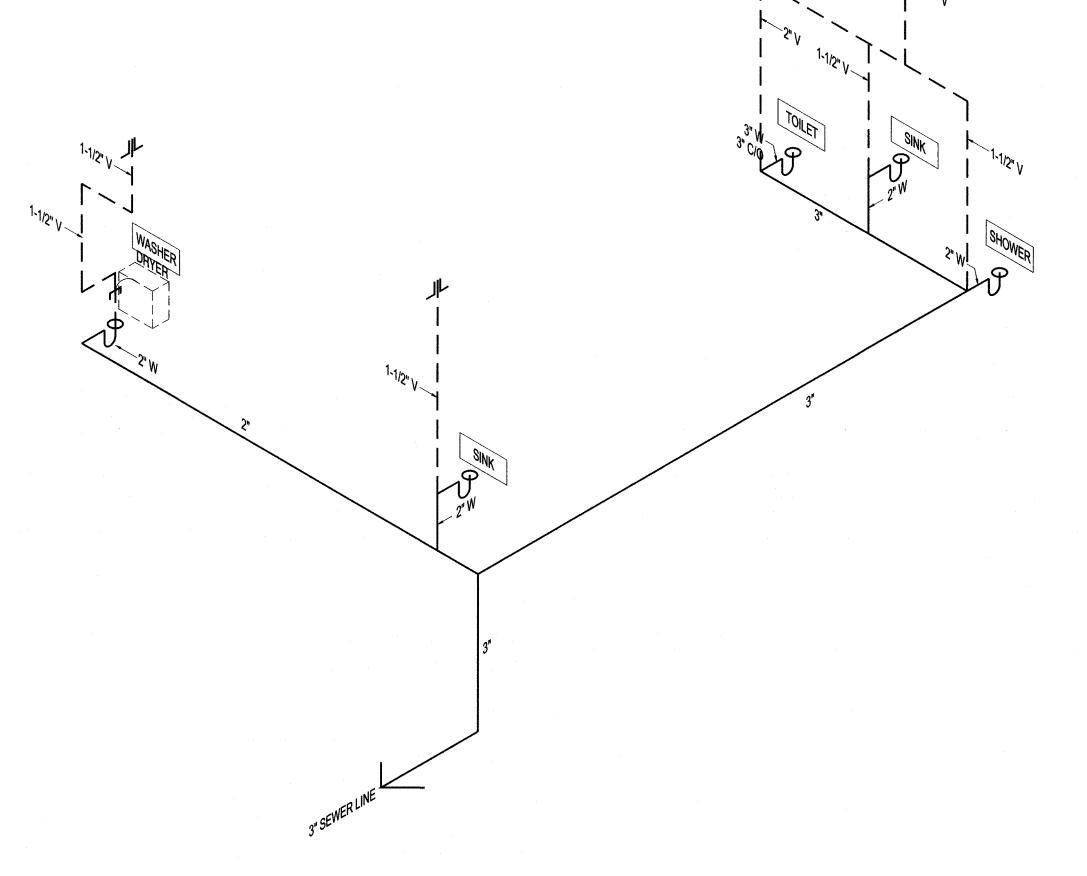

## **WASTE AND VENT RISER DIAGRAM**

NOT TO SCALE

It shall be the responsibility of the General Contractor and all subcontractors who are bidding and participating in the work to review all sheets of the Construction Documents and to become familiar with all phases of the proposed project.

The General Contractor and all subcontractors shall provide adequate protection in and around the project. The General Contractor shall bear all expense for repair or replacement of damaged work caused by a subcontractor that failed to protect another trades work.

MANUFACTURER

Exhibit 7

# method homes

2921 EASTLAKE AVE E SEATTLE, WA 98102 206.789.5553 info@methodhomes.net

MODEL

**PROJECT** 

ABODU

SHEET TITLE

PLUMBING RISER DIAGRAMS & DETAILS

OFFICE PROJECT NO. AS NOTED


06.13.2020

### MECHANICAL LEGEND

- PROGRAMMABLE THERMOSTAT WITH A CLOCK MECHANISM THAT ALLOWS THE BUILDING OCCUPANT TO PROGRAM THE TEMPERATURE SETPOINTS FOR AT LEAST FOUR PERIODS WITHIN 24 HOURS.
- PANASONIC WHISPER GREEN FV-05-11VKS1 EXHAUST FAN. CFM AS NOTED
- RANGE HOOD EXHAUST FAN. CFM AS NOTED.
- EXHAUST VENT THRU WALL


### TYPICAL MECHANICAL NOTES

- 1. 60 CFM MIN. FOR ALL FANS, U.N.O.
- 2. 100 CFM FOR RANGE HOOD, U.N.O.
- 3. SONE RATING OF CEILING FANS TO BE < 0.3
- 4. DOORS TO BE UNDERCUT MIN. 1/2"
- 5. VERIFY REQUIREMENTS FOR ALL APPLIANCES PER MANUFACTURER'S SPECIFICATIONS.
- REQUIRED VENTILATION WILL BE ACHIEVED THROUGH OPERABLE WINDOWS. SEE WINDOW SCHEDULE.

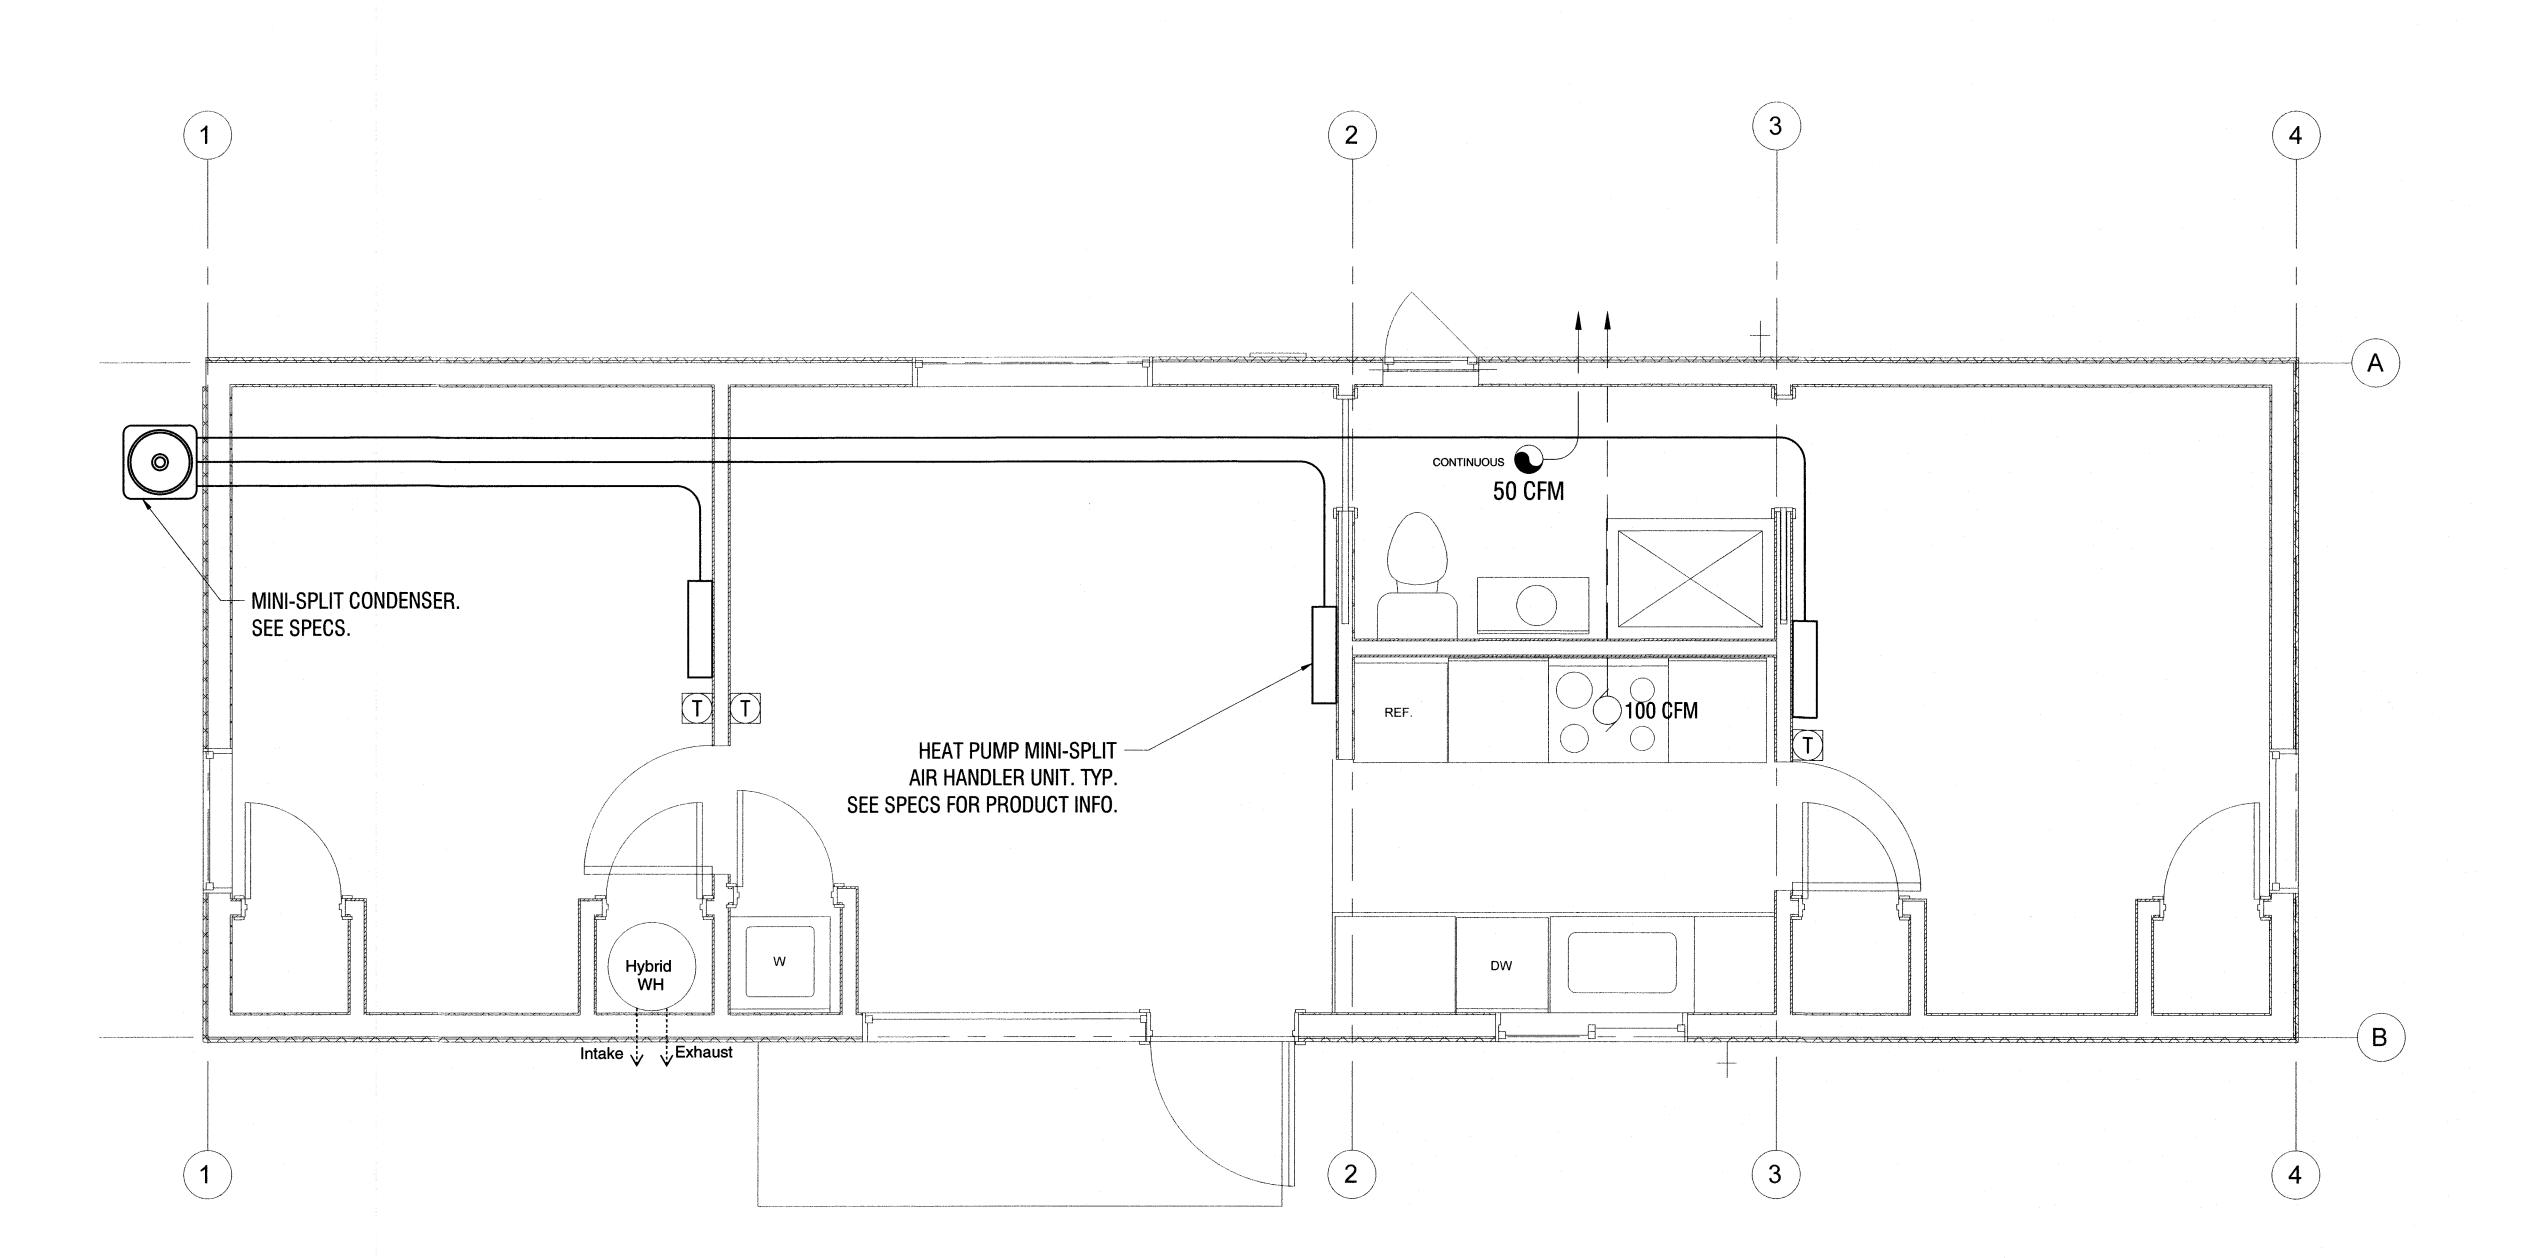

MECHANICAL LAYOUT FIRST FLOOR

1/2"=1'-0"



It shall be the responsibility of the General Contractor and all subcontractors who are bidding and participating in the work to review all sheets of the Construction Documents and to become familiar with all phases of the proposed project.

The General Contractor and all subcontractors shall provide adequate protection in and around the project. The General Contractor shall bear all expense for repair or replacement of damaged work caused by a subcontractor that failed to protect another trades work.

MANUFACTURER



2921 EASTLAKE AVE E SEATTLE, WA 98102 206.789.5553

**PROJECT** 

**ABODU** 

SHEET TITLE

**MECHANICAL** LAYOUT


REVISIONS:			
		-	
-			
·			
			. '

PROJECT INFORMATION:	
OFFICE PROJECT NO.	
REVIEWED BY:	
DRAWN BY:	TLS
SCALE:	AS NOTED
DATE:	06.13.2020

M1.0

# ABODU MODULAR

# Washington

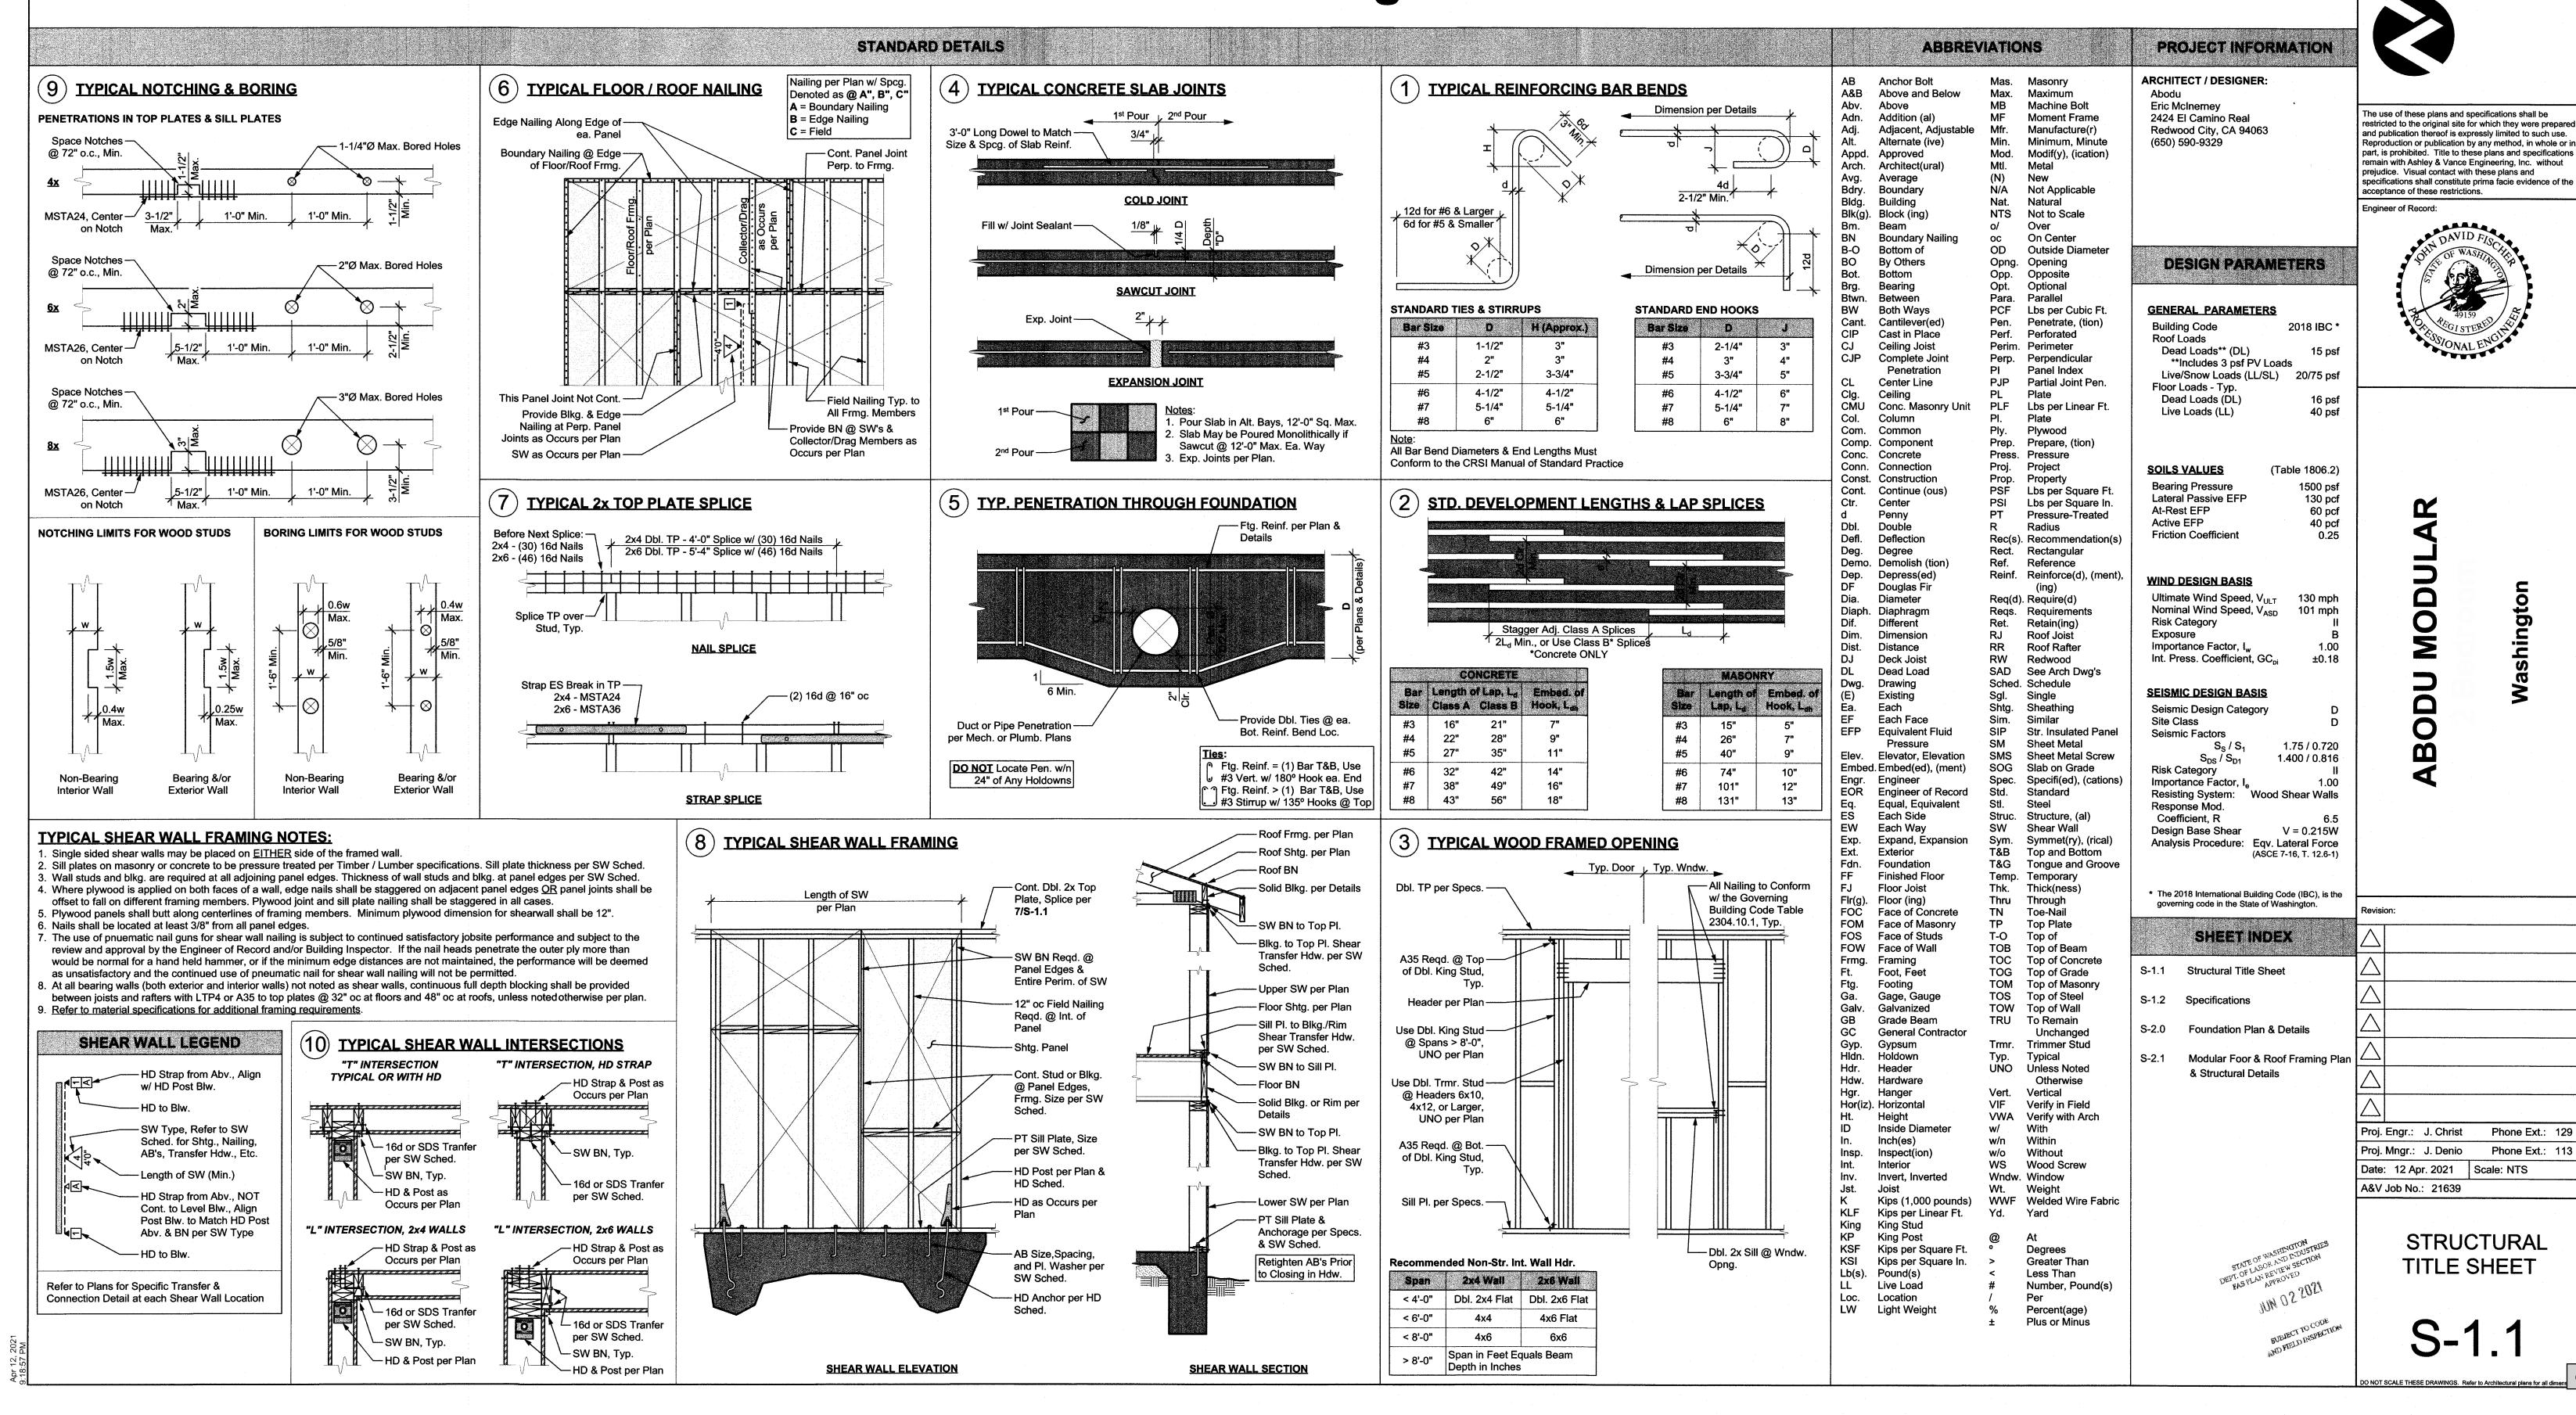

restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or i part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without specifications shall constitute prima facie evidence of the

6. DO NOT scale structural plans. Contractor shall use all written dimensions on Architectural

7. Construction materials shall be uniformly spread out if placed on floor or roof so as to not overload the framing. Load shall not exceed the design live load per square foot. It is the Contractor's responsibility to provide adequate shoring and/or bracing as required. 8. Specifications and detailing of all waterproofing and drainage items, while sometimes shown on the structural plans for general information purposes only, are solely the design responsibility of others. 9. The Engineer will not be responsible for and will not have control or charge of construction

means, methods, techniques, sequences or procedures, or for safety precautions and programs in connection with the construction delineated by these plans. It should be understood that the Contractor or his/her agent(s) shall supervise and direct all work and shall be solely and completely responsible for all construction means, methods, techniques, sequences, procedures and conditions on the job site, including safety of all persons and property during the entire period of construction. Periodic observations by the Engineer, his staff or representatives are not intended to include verification of dimensions or review the adequacy of the Contractor's safety measures on or near the construction site.

10. Modifications of the plans, notes, details and specifications shall not be permitted without prior approval from the Engineer. 11. All workmanship shall conform to the best practice prevailing in the various trades performing

the work. The Contractor shall be responsible for coordinating the work of all trades. 12. It is the Contractor's responsibility to ensure that only approved structural plans are used during the course of construction. The use of unapproved documents shall be at the contractor's own risk. Corrections of all work based on such documents shall be performed at the Contractor's expense.

13. These plans and specifications represent the structural design only. No information nor warranty is provided for the work of any other Consultant (Architect, Mechanical, Electrical, etc.). This includes, but is not limited to, waterproofing, drainage, ventilation, accessibility, or

1. Refer to Structural Design Parameters section on sheet S-1.1 for all soil design values used

2. Soils values per Table 1806.2 of the latest edition of the Governing Building Code. 3. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer

4. All compaction, fill, backfilling and site preparation shall be performed in accordance with project soils report or the Governing Building Code Chapter 18 & Appendix J. All such work shall be performed under the supervision of the building official.

5. Excavate to required depths and dimensions (as indicated in the drawings), cut square and smooth with firm level bottoms. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. 6. Foundations shall be poured in neat excavations.

7. Excavate all foundations to required depths into compacted fill or natural soil (as per plans and details) and as verified by the building official and/or soils engineer. 8. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.

9. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s). 10. It is the responsibility of the contractor in charge of framing to properly position all holdown

bolts, anchor bolts, column bases, and all other cast-in-place hardware. Refer to typical details. All hardware to be secured prior to foundation inspections. 11. The sides and bottoms of dry excavations must be moistened just prior to placing concrete.

Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions. 12. The Contractor shall be solely responsible for all excavation procedures including lagging,

shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond 2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except

that #3 & #4 bars may be Grade 40. All weld wire fabric (WWF) shall conform to ASTM

3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.

4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement. 5. Fabrication, placement and installation of reinforcing steel shall conform to: (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice

(b) the Governing Building Code, Section 1907. 6. Shop drawings for fabrication of reinforcing steel shall be approved by the Contractor and submitted to the Architect and Engineer for review and approval prior to fabrication. Shop drawings are not required for slabs-on-grade or foundations unless specifically noted on the structural plans.

7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

8. Refer to Concrete and Masonry notes for specific minimum splice length and splice staggering requirements. Lap welded wire fabric (WWF) reinforcement two (2) modules minimum (UNO). All splices are to be staggered.

CONCRETE

1. All concrete shall have: (a) an ultimate compressive strength (fc) of 3,000 psi at 28 days (UNO).

(b) a maximum slump of 5" at point of placement. (c) a W/C ratio of 0.55 or less for all slabs, walls, and columns, and 0.60 or less for all foundations

(d) a normal dry-weight density (UNO). 2. Special inspection is NOT required as the foundations have been <u>designed</u> with f'c = 2,500 psi in accordance with the Governing Building Code, section 1705.3, exceptions 1, 2.1, and 2.3, unless explicitly specified herein, on the structural plans, or by the Building Department. As a minimum, special inspection is always required on:

(a) structural slabs, flat plates

(b) walls, columns, beams (c) piles, caissons

(d) welding of reinforcement, installation of mechanical bar splice devices, epoxy

When required or specified, special inspection services shall conform to the Governing Building Code, Chapter 17 and shall be provided by an ICC certified inspector or Building Department approved engineer. The Building Department reserves the right to waive or require the special inspection requirements [Section 1704.1 and 1704.4] . Nothing in these plans waives the Building Department's right to require special inspection at any point and on

3. Testing of materials used in concrete construction must be performed as noted on structural plans or at the request of the Building Department to determine if materials are quality specified. Tests of materials and of concrete shall be made by an approved agency and at the expense of the contractor; such tests shall be made in accordance with the standards listed in the Governing Building Code, Table 1704.4. When testing of concrete is required, four (4) test cylinders shall be taken from each 150 yards, or fraction thereof, poured in any one day. One (1) cylinder shall be tested at seven (7) days; two (2) at 28 days; one (1) shall be held in reserve. If Contractor elects to have additional tests performed for "early-break" results, additional test cylinders must be taken. At no time shall the Contractor instruct the testing agency to perform tests on a schedule different than above without the prior authorization of the Engineer. Contractor is responsible for complying with applicable testing requirements of the Building Department. Copies of all test reports shall be provided to Engineer and Building Department for review in a timely manner.

4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense

5. All concrete work shall conform with the Governing Building Code, Chapter 19. 6. All cement shall be Portland Cement Type I or II and shall conform to ASTM C 150. 7. All aggregates shall conform to ASTM C33. Maximum aggregate sizes:

(a) Footings: 1-1/2" (b) All other work: 3/4"

8. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:

(a) Permanently exposed to earth or weather Cast against earth: Cast against forms:

(b) Not exposed to earth or weather Slabs, walls, joists: 3/4" ii. Beams, girders, columns: 1-1/2"

9. The minimum lap splice length for all reinforcing steel shall be as noted in the typical details on sheet S-1.1. All lap splices to be staggered.

10. All reinforcing steel, anchor bolts, dowels, inserts, and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items

11. Locations of all construction joints, other than specified on the structural plans, shall be approved by the Architect and Engineer prior to forming. Construction joints shall be thoroughly air and water cleaned and heavily roughened so as to expose coarse aggregates. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement. Unless specifically detailed or otherwise noted, construction and control joints shall be provided in all concrete slabs-on-grade. Joints shall be located such that the area does not exceed 400 sq. feet.

12. The Architect, Engineer and appropriate inspectors shall be notified in a timely manner for a reinforcement inspection prior to the placement of any concrete. 13. The Contractor shall obtain approval from the Architect and the Engineer prior to placing

sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All piles or conduits passing through concrete members shall be sleeved with standard steel pipe

14. The Contractor is responsible for design, installation, maintenance and removal of all formwork. Forms shall be properly constructed, sufficiently tight to prevent leakage, sufficiently strong, and braced to maintain their shape and alignment until no longer needed for concrete support. Joints in formwork shall be tightly fitted and blocked, and shall produce a finished concrete surface that is true and free from blemishes. Forms for exposed concrete shall be pre-approved by the Architect to ensure conformance with design intent.

15. Remove form work in accordance with the following schedule:

(a) Forms at slab edge: (b) Side forms at footings: 2 days (c) All other vertical surfaces: 7 days

(d) Beams, columns, girders: 15 days

(e) Elevated slabs: 28 days Engineer reserves the right to modify removal schedule above based on field observations. concrete conditions, and/or concrete test results.

All concrete (except slabs-on-grade 6" or less) shall be mechanically vibrated as it is placed. Vibrator to be operated by experienced personnel. The vibrator shall be used to consolidate the concrete. The vibrator shall not be used to convey concrete, nor shall it be placed on reinforcing and/or forms.

17. Concrete shall be maintained in a moist condition for a min. of five (5) days after placement. 18. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six

(6) feet, use tremie, pump or other method consistent with applicable standards. 19. When specified ultimate compressive strength is greater than 2500 psi, Contractor shall submit mix designs to Architect and Engineer for approval seven (7) days prior toplacement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be

provided for all admixtures. 20. Refer to Architectural plans for locations of all dimensions, slab depressions, slopes, drains, curbs, and control joints

**ROUGH CARPENTRY** 1. Refer to latest edition of the the Governing Building Code, Table 2304.10.1. for all minimum nailing requirements.

2. Refer to individual sections for applicable material specifications. 3. Fabricate, size, install, connect, fasten, bore, notch, and cut wood and plywood with joints true, tight, and well-nailed, screwed or bolted as required, all members to have solid bearing without being shimmed, unless noted otherwise. Set horizontal members subject to bending with the crown up. Install framing plumb, square, true and cut for full bearing. Splices are not permitted between bearings. Use full lengths unless otherwise specified.

Metal framing angles, anchor, clips, straps, ties, holdowns, etc. shall be mfg by Simpson Strong-Tie Co. No substitutions shall be permitted without prior approval of the Engineer. 5. All walls are to have continuous double 2x top plates spliced as followings unless specifically

noted otherwise on the plans and details. Wall Studs:

(a) Unless specifically noted on the plan and details, use the following guidelines for wall

i. Use 2x4 studs at 16" oc for walls less than 9'-0" tall. ii. Walls 9'-0" to 16'-0" tall shall be constructed of 2x6 studs at 16" oc iii. Request specifically engineered wall details for walls greater that 16'-0" tall.

(a) Provide min. one row of nominal 2" thick blocking of same width as stud, fitted snugly and spiked into studs at mid-height of partitions or walls over 8' high. (b) All foundation cripple walls (or "pony walls") less than 14" in height shall be solid blocking. (c) Refer to shearwall section for additional blocking requirements.

(b) In exterior and bearing walls, notches shall not exceed 25% of the stud depth.

(c) Non-bearing partition walls, notches shall not exceed 40% of the stud depth.

(d) Successive notches in the same member shall be spaced a min of 18" apart. (a) Is not permitted of any structural member without prior approval (b) In exterior and bearing walls, holes shall not exceed 40% of the stud depth. (c) Non-bearing partition walls, may be drilled not greater than 60% of stud depth. (d) Successive holes in the same member shall be spaced a minimum of 18" apart.

(a) Is not permitted of any structural member without prior approval

10. Bearing: (a) Provide a min. of 1-1/2" of bearing for all 2x joists and hdrs 4x10 / 6x8 & smaller. (b) Provide a min. of 3" of bearing for all beams and hdrs 4x12 / 6x10 & larger, UNO on

(c) Members bearing on prefabricated hangers are to have full bearing and nailing per manufacturer's specifications. (a) Posts inside walls shall bear on sill plates and shall be continuous between top and bottom plates, unless specifically noted otherwise

(b) Provide posts under all beams, girders or double joists equal to the width of the supported member. (c) Posts on upper levels are to be stacked on posts of equal size at levels below.

unless a larger post is specified on the plans. (d) Vertically oriented blocking ("squash blocking") shall be used to fully transfer the post area through floors to foundation. Vertical blocking shall be equal to floor thickness

(e) Headers framing into continuous posts without trimmer studs shall be supported in Simpson HUC hangers unless noted otherwise on the plans.

(f) Posts when isolated, shall be seated in Simpson post or column bases, unless noted otherwise on the plans

12. Roof Framing: (a) Provide wood joists, as specified, laid with the crown up and spaced as indicated.

(b) Provide a minimum of 1-1/2" end bearing unless otherwise shown. (c) Provide full depth solid 2x blkg or cross-bridging between the joists at 8' oc max. (d) Provide all cricket framing required to achieve positive drainage per Arch. (e) Install plywood panels with the face grain across the framing and close joints and nail

at each support. Fully nail with common nails per the plans. (f) Plywood panels shall not be less than 4' x 8' except at boundaries and changes in framing direction, where the minimum panel dimension shall be no less than 24", unless all edges of undersized panels are supported by and fastened to framing

members or blocking, (g) Provide Simpson "PSCL" clips at all plywood joints perpendicular to framing. Provide clips midway between framing members at the unsupported edges of plywood when members are spaced at 24" oc or greater. If clips are not used, provide solid blocking

for joints perpendicular to framing. 13. Floor Framing:

(a) Provide wood joists, as specified, laid with the crown up and spaced as indicated. (b) Provide a minimum of 1-1/2" end bearing unless otherwise shown. (c) Provide full depth solid 2x blkg or cross-bridging between the joists at 8' oc max. For floors framed with I joists, refer to the mfg's spec's for blkg requirements.

(d) Provide full depth solid 2x blocking between the joists under all walls and partitions where the wall or partition is perpendicular to the floor framing (including floors framed with I joists) (e) Install plywood sheathing with the face grain across supports, end supports

staggered, and the edges of sheets centered over supports. If T&G plywood issused, blocking need not be provided at all plywood edges (UNO per plan). If T&G plywood is not used, blocking shall be provided at all plywood edges. Glue plywood to joists and fully nail with common nails per the plans.

(f) Plywood panels shall not be less than 4' x 8' except at boundaries and changes in framing direction, where the minimum panel dimension shall be no less than 24", unless all edges of undersized panels are supported by and fastened to framing members or blocking.

14. Shear Walls: (a) Refer to plans for all shearwall locations, length type and nailing.

(b) Refer to Shearwall Schedule on title sheet for additional information. (c) Shear wall lengths specified on plans are minimum required. (d) Shear walls to be nailed with common nails. All nails to have minimum 3/8" edge distance to panel or framing member.

(e) Where 3x framing is required per the shear wall schedule, stagger edge nailing. (f) Oriented Strand Board (OSB) may be used in lieu of plywood.

 All structural lumber shall be Douglas Fir-Larch, S4S and shall conform to the Governing Building Code, section 2303.1.1.

2. The minimum lumber grade of each member shall be as follows (unless specifically notedotherwise on plans and details) (a) 2x studs, blocking, plates:Stud (b) 2x joists #2 or better

(c) 4x4, 4x6, or 6x6 beams or posts #2 or better (d) 4x8, 6x8, or larger beams or posts #1 or better It is recommended (but not required) that all exposed members be Select Structural or better

and free of heart center due to visual characteristics. 3. All lumber in contact with concrete or masonry shall be pressure treated Douglas Fir. Whenever it is necessary to cut, notch, bore or splice pressure treated material, all newlycut surfaces shall be thoroughly painted with the same preservative.

4. Maximum moisture content for all structural members shall not exceed 19%. 5. All plywood sheathing shall be CDX grade (or better) Douglas Fir with exterior glue. All sheathing shall conform to the Governing Building Code Standard 23-2 and grade-marked by the American Plywood Association (APA). Panel index to be 40/20 for floors and 24/0 for roofs unless specifically noted otherwise on the plans and details

**ENGINEERED LUMBER** 

i. E=

ii. Fb=

2. Laminated Veneer Lumber (LVL) : (a) shall be 1-3/4" minimum thickness with the following minimum properties: 2000 ksi E =

2600 psi ii. Fb= 285 psi iii. Fv = iv. Fc (parallel) = 2500 psi v. Fc (perp.) = 750 psi vi. Ft (parallel) = 1500 psi vii. Specific Gravity = 0.50

(b) shall be fabricated by an approved manufacturer (c) shall bear a minimum of 3-1/2" on specified supports. Provide full depth solid

blocking at all bearing points (d) shall be nailed in accordance with mfg's specifications. Unless otherwise approved,

nailing into the top edge shall not be spaced any closer than: i. 16d @ 6" oc, 10d @ 4" oc, and 8d @ 3" oc When nailing must be reduced, stagger rows a minimum of 1/2" apart while

maintaining proper edge distances. (e) shall be, when comprised of multiple members, connected with 16d nail, 1/2" bolts or 1/4" lag screws in accordance with manufacturer's specifications. (f) shall not be cut, notched or drilled without specific written approval of the EOR.

Laminated Strand Lumber (LSL): (a) shall be 1-1/4" minimum thickness with the following minimum properties:

1550 ksi

2325 psi

iii. Fv = 310 psi iv. Fc (parallel) = 2500 psi v. Fc (perp.) = 800 psi vi. Ft (parallel) = 1070 psi vii. Specific Gravity = 0.50 (b) shall be fabricated by an approved manufacturer (c) shall bear a minimum of 3-1/2" on specified supports. Provide full depth solid blocking at all bearing points

(d) shall be nailed in accordance with mfg's specifications. Unless otherwise approved, nailing into the top edge shall not be spaced any closer than: i. 16d @ 6" oc, 10d @ 4" oc, and 8d @ 3" oc

ii. When nailing must be reduced, stagger rows a minimum of 1/2" apart while maintaining proper edge distances. (e) shall be, when comprised of multiple members, connected with 16d nail, 1/2" bolts or 1/4" lag screws in accordance with manufacturer's specifications.

(f) shall not be cut, notched or drilled without specific written approval of the EOR. Parallel Strand Lumber (PSL):

(a) shall be 2-1/2" minimum thickness with the following minimum properties: i. E= 2000 ksi ii. Fb= 2900 psi iii. Fv = 290 psi

2900 psi

750 psi v. Fc (perp.) = 2025 psi vi. Ft (parallel) = vii. Specific Gravity = 0.50

iv. Fc (parallel) =

(b) shall be fabricated by an approved manufacturer (c) shall bear a minimum of 3-1/2" on specified supports. Provide full depth solid blocking at all bearing points

approved, nailing shall not be spaced any closer than: i. Narrow face: 16d @ 6" oc, 10d @ 4" oc, and 8d @ 3" oc ii. Wide Face: 16d @ 8" oc, and 10d & 8d @ 6" oc

(d) shall be nailed in accordance with manufacturer's specifications. Unless otherwise

iii. When nailing must be reduced, stagger rows a minimum of 1/2" apart while maintaining proper edge distances (e) shall not be cut, notched or drilled without specific written approval of the EOR.

5. Plywood I Joists: (a) type and manufacturer shall be clearly noted on the plans. Substitutions shall not be permitted without prior approval of the Engineer

(b) shall be installed in accordance with applicable code approvals and mfg's spec's. (c) shall bear a minimum of 1-3/4" at all end supports, and 3-1/2" at intermediate supports. Provide full depth solid blocking at all bearing points.

(d) shall be installed with intermediate blocking or bridging as specified by the Mfr. Only omit intermediate blocking when specifically allowed by the Mfr. (e) shall not be cut, notched or drilled without specific written approval of the EOR.

**FASTENERS** 

(a) shall be with "common" nails unless noted otherwise. (b) shall not be driven closer than 1/2 their length nor closer than 1/4 of their length to the edge or end of a member, except for sheathing.

(c) shall be installed in pre-drilled lead holes if necessary to avoid splitting. (d) shall be hot-dipped zinc-coated galvanized steel, stainless steel, silicon bronze, or copper when in contact with preservative-treated wood. i. When used in exterior applications, nails shall have coating types and weights in

accordance with the treated wood or bolt manufacturer's Recs. A Min. of ASTM A653, type G185 zinc-coated galvanized steel (or equiv.) shall be used. ii. When used in an interior, dry environment in SBX/DOT or zinc borate preservative-treated wood, plain carbon nails shall be permitted. (e) All nailing shall conform to the Governing Building Code, Table 2304.10.1.

Lag screws: (a) shall be installed into pre-drilled lead holes. Lubricant (or soap) shall be used to facilitate installation and prevent damage to the screws.

(b) shall be hot-dipped zinc-coated galvanized steel or stainless steel when in contact with preservative-treated wood. When used in exterior applications, bolts shall have coating types and weights in accordance with the treated wood or bolt manufacturer's rec's. A minimum of

ASTM A653, type G185 zinc-coated galvanized steel (or equal) shall be used. When used in dry interior environments in SBX/DOT or zinc borate preservativetreated wood, plain carbon screws, nuts, and washers shall be permitted.

(a) shall conform to ASTM A307, UNO specifically on plans and details. (b) shall be installed in pre-drilled holes a max of 1/16" larger than the specified bolt dia. (c) when installed against wood surfaces, shall have standard washers under the heads

(d) shall be hot-dipped zinc-coated galvanized steel or stainless steel when in contact with preservative-treated wood. i. When used in exterior applications, bolts shall have coating types and weights in accordance with the treated wood or bolt manufacturer's rec's. A minimum of ASTM A653, type G185 zinc-coated galvanized steel (or equal) shall be used.

ii. When used in dry interior environments in SBX/DOT or zinc borate preservative-

treated wood, plain carbon screws, nuts, and washers shall be permitted. 4. Anchor Bolts: (a) shall be installed at all exterior walls and all interior shear and/or bearing walls. (b) shall be 5/8" diameter with 3x3x0.229" steel plate washers at shearwalls. (c) shall be 5/8" diameter with 2x2x3/16" steel plate washers at non-shearwalls.

(d) shall have 7" minimum embedment. (Contractor to coordinate length of bolts with sill plate thicknesses). (e) shall conform to ASTM A307.

(f) shall be hot-dipped zinc-coated galvanized steel or stainless steel when in contact with preservative-treated wood. i. When used in exterior applications, bolts shall have coating types and weights in accordance with the treated wood or bolt manufacturer's rec's. A minimum of ASTM A653, type G185 zinc-coated galvanized steel (or equal) shall be used. ii. When used in dry interior environments in SBX/DOT or zinc borate preservativetreated wood, plain carbon screws, nuts, and washers shall be permitted.

(g) shall not be spaced greater than 72" oc Refer to shearwall schedule for specific anchor bolt spacing requirements. (h) shall be placed a maximum of 12" from wall corners, wall ends, and sill plate splices

(but not less than 7 dia.), and a min. of two bolts per piece of sill plate is required. (i) shall be secured in place prior to foundation inspection.

65

The use of these plans and specifications shall be restricted to the original site for which they were prepare and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions. Engineer of Record:



0

0


Proj. Engr.: J. Christ Phone Ext.: 129

A&V Job No.: 21639 STRUCTURAL **SPECIFICATIONS** 


Proj. Mngr.: J. Denio


Date: 12 Apr. 2021 | Scale: NTS

Phone Ext.: 113

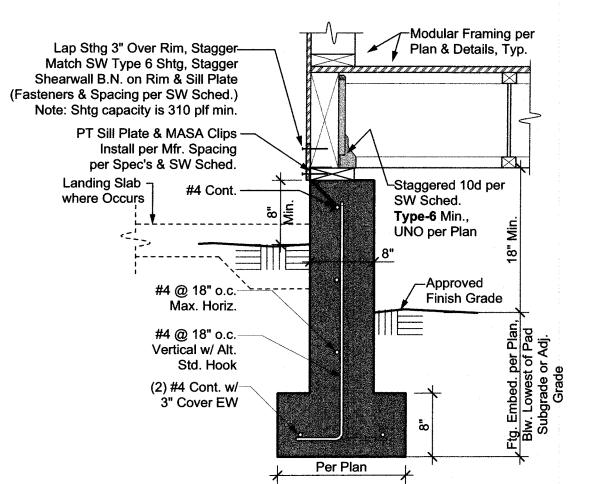


TYP. STEM WALL FOUNDATION & MARRIAGE

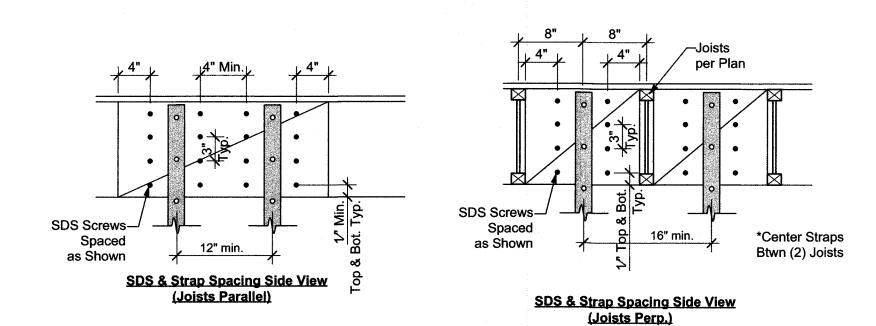

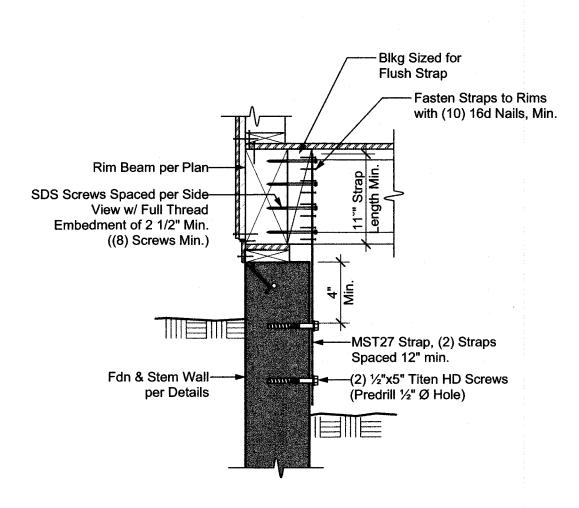

MST27 HOLDOWN FROM RIM TO FDN.


Strap to Blkg @ LVL Rims

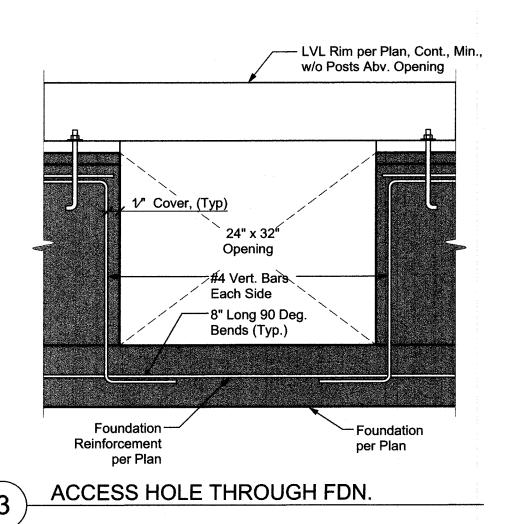


All Beams to Bear on Plates w/ Indicated Post or Doubler Below Unless Noted Otherwise All Lumber 4x6,6x6 and Smaller to be DF #2 UNO All Lumber 4x8, 6x8 and Larger to be DF #1 UNO All Walls to have Continuous Double Top Plates, All Splices to be per Details on Sheet S-1.1 MOD Floor Joists (See Sheet S-2.2) Waterproofing, flashing, & finish details per Architecturals. All dimensions per Architectural plans

GENERAL FRAMING NOTES

Beams in MOD Above (See Sheet S-2.2)

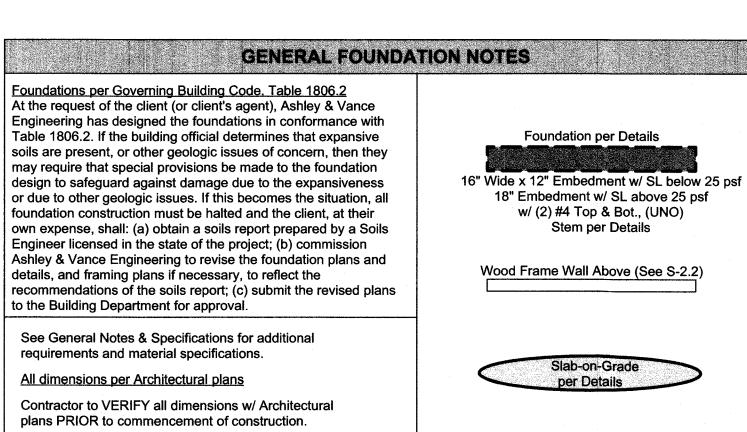

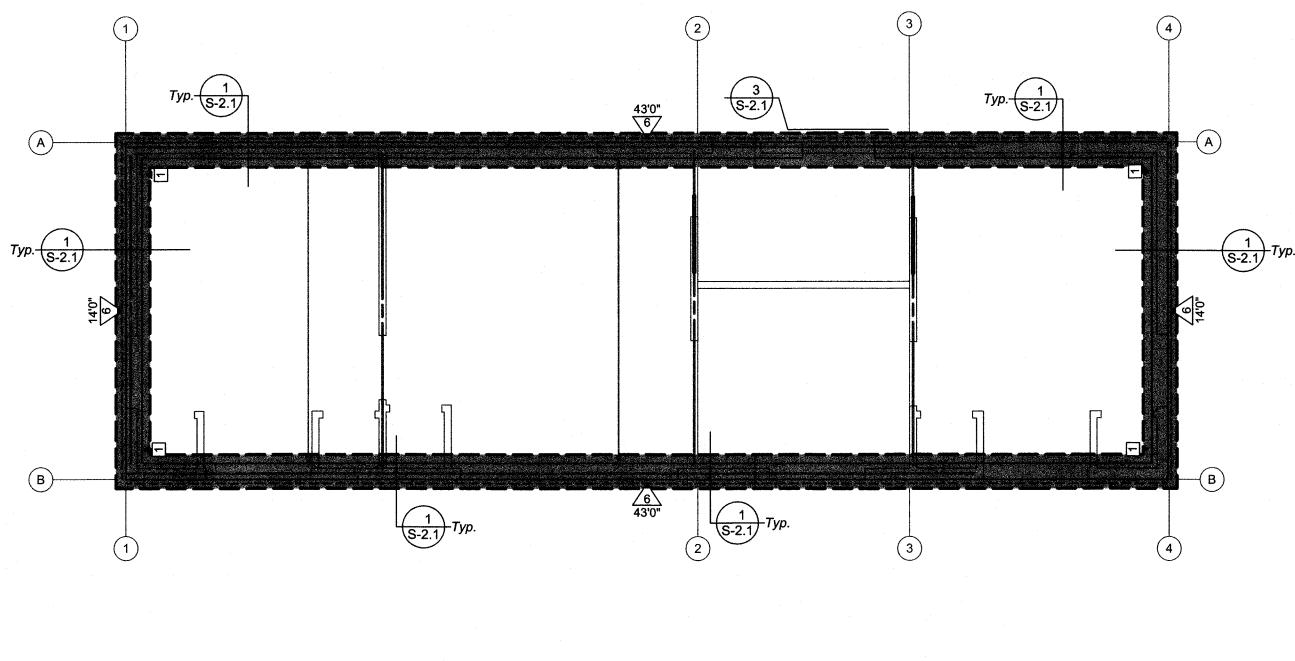

SHEARWALL SCHEDULE

DESCRIPTION

15/32" CDX Plywood N 2x

Manufacturer Note: Minimum MASA end distance is 4" and minimum center-to-center spacing is 8" for full load.

NOTE: FOUNDATION DESIGN IS TO BE VERIFIED FOR SPECIFIC PROPERTY LOCATION, AND TO CONFORM TO THE REQUIREMENTS OF THE LOCAL JURISDICTION.

NAILING<sup>1</sup>

All nails to be COMMONS. DO NOT use box type nails. All "field" nailing to be 12" oc, UNO.
 All transfers to be installed into min. 1-1/2" thick members, UNO. Where clips are spaced less than 6" oc, stagger clips on each

2. All transfers to be installed into min. 1-1/2" thick members, UNO. Where clips are spaced less than 6" oc. stagger clips on each side of wall.

3. All shear walls to have 1/2" anchor botts, embeded 7" into concrete foundations, with 3"x3"x0.229" thick plate washers, minimum. Washers may be slotted (slot length not to exceed 1-3/4") will standard out washer placed between nut and plate washers. Washers shall extend within 1/2" of the edge of the bottom plate on the sheathed side. Af walls sheathed on 2 sides, plate washers shall be alternated to each side of plate. [Governing Bulding Code; Section 2308.3.2] [AF&PA SDPWS 4.3.6.4.3]

4. Simpson SDS 1/4"x4-1/2" Screws through 2x sill, or SDS 1/4"x6" Screws through 3x sill or double plates. Install into minimum 1-3/4" thickurs members (rim and/or blocking). [ICC ESR 2236]

5. See details for permitted transfer clip types and locations.

6. Orient LTP4 and LTP5 clips such that the long dimension is horizontal.

7. Where LTP4 clips are installed over shear wall sheathing, fasteri with full length 8d common nails.

8. 18d common nails through the sill plate to rim member or blocking.

9. Install screws into 3-1/2" wide continuous member. LSL, LVL, or PSL members are NOT acceptable, UNO.

10. Install screws into Glulams or solid sawn member. LSL, LVL, or PSL members are NOT acceptable, UNO.

11. Simpson 5" SOWS Screws through 2x sill, or 8" SDWS 1/4"x8" Screws through 3x sill or double plates. Install into minimum 1-3/4" thick members (rim and/or blocking), [ICC ES AC233]

12. Many 2x bearing runner below modular building to 2x sill plate, stagger 1-1/2" apart.

13. Mass Clips to be used at Shear walls in lieu of Anchor Bolts, Install per Mfr, Simpson Strong-Tie.


2x 10d 6" 48" 48"

DBL. SILL PANEL SIZE SPC'G 1/2"Ø MASA SDS SDW\$ A35, LTP4,5.6.7

SIDED PLATE B'DRY SIZE SPC'G AB MASA Screw Screw or LTP5

Exhibit 7

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.



# 

	DOWN SCH	HEDULE			
	HOLDOWN <sup>1</sup>	MIN. POST	ANCHOR / EMBEDMENT	DETAILS	Revision:
	CS14	(2) 2x	N/A	3/S-2.2	
	(2) CS14	(2) 2x	N/A	3/S-2.2	
	(2) MST27	N/A	N/A	2/S-2.1	
	NOTES:				
a		nstalled per detail	10/9-1.1, Typical Shea	irwall	
Ĭ					


TRANSFERS<sup>2</sup>


$\triangle$
$\triangle$
$\triangle$
$\triangle$
Proj. Engr.: J. Christ Phone Ext.: 129
Proj. Mngr.: J. Denio Phone Ext.: 113
Date: 12 Apr. 2021   Scale: 1/4"=1'-0"
A&V Job No.: 21639
SITE FOUNDATION PLAN & DETAILS


to the Building Department for approval. See General Notes & Specifications for additional

All dimensions per Architectural plans Contractor to VERIFY all dimensions w/ Architectural


plans PRIOR to commencement of construction.

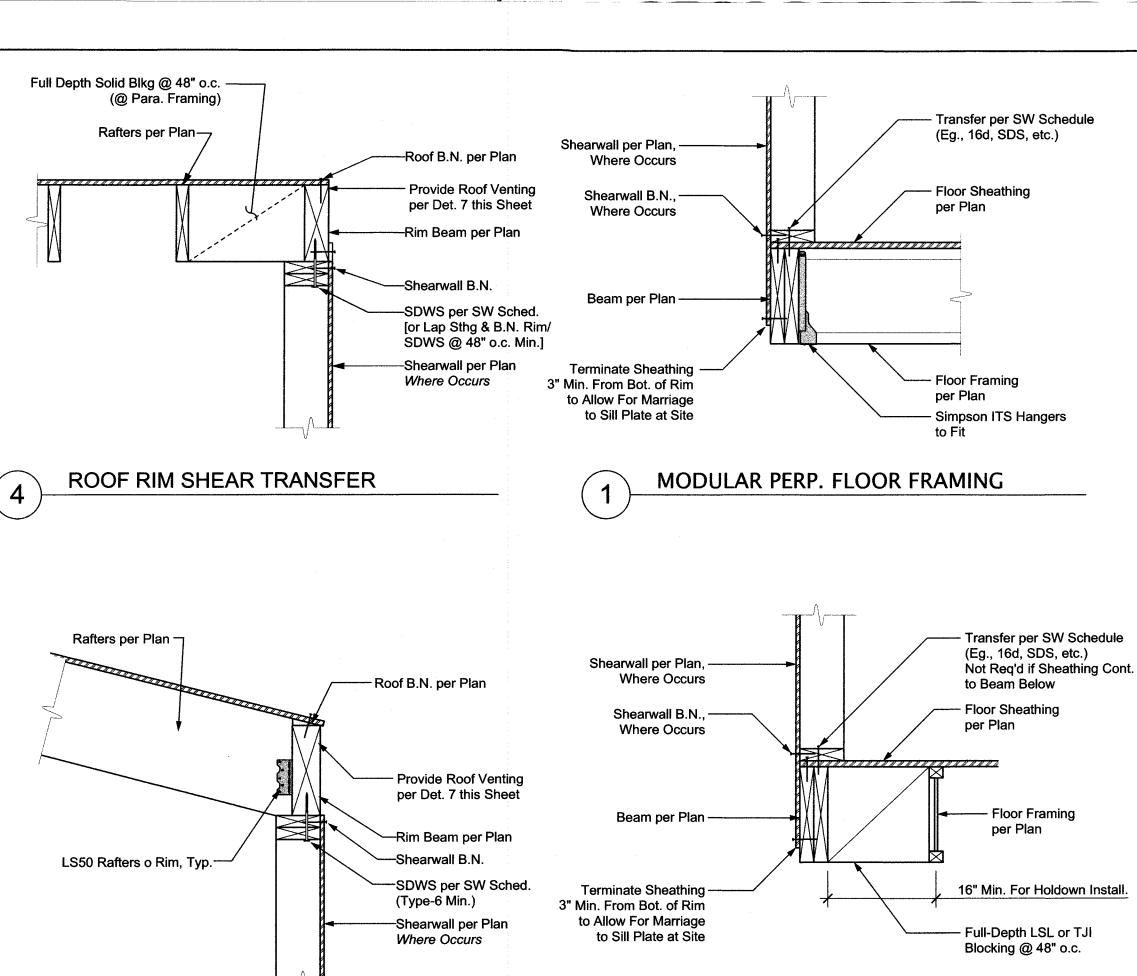

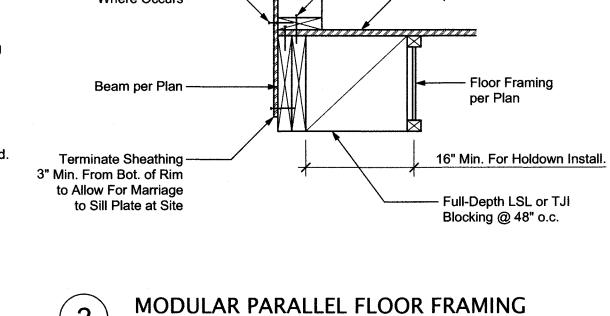


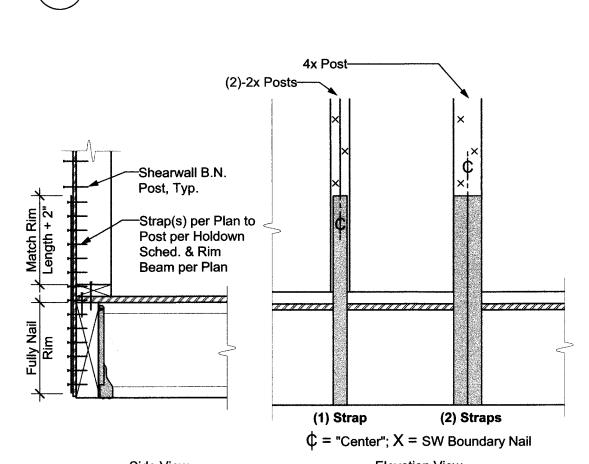



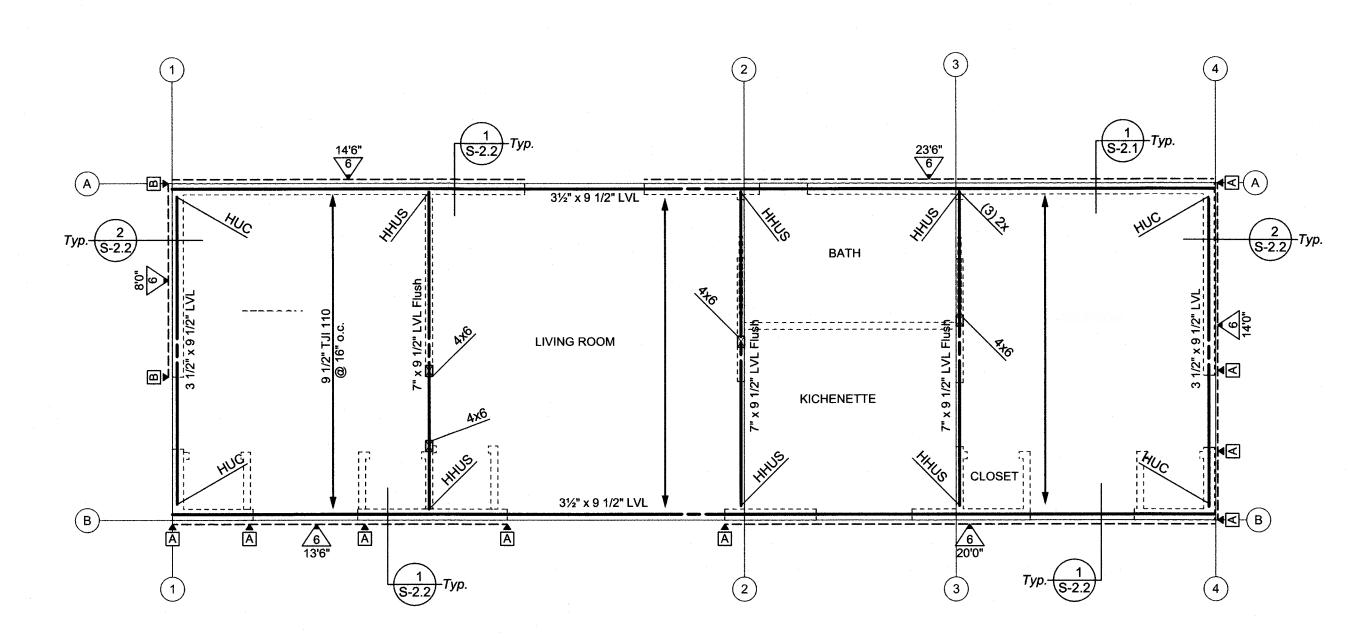

# **MODULAR FLOOR PLAN**

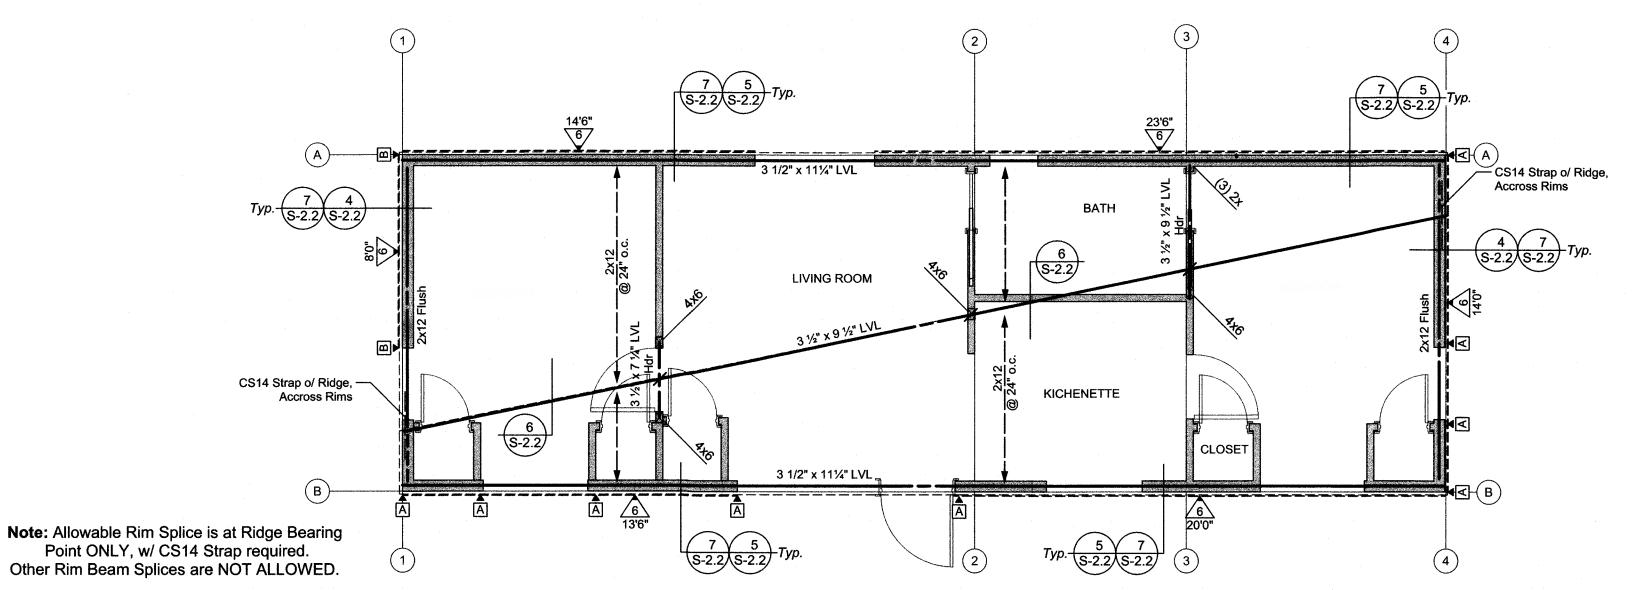

### **MODULAR ROOF PLAN**


WALL SCHEDULE

Wood-Framed Wall per Arch

Interior: 2x4 D.F. Studs @ 16" o.c., Min.

Exterior: 2x6 D.F. Studs @ 16" o.c., Min.

Stud wall locations per Architecturals.

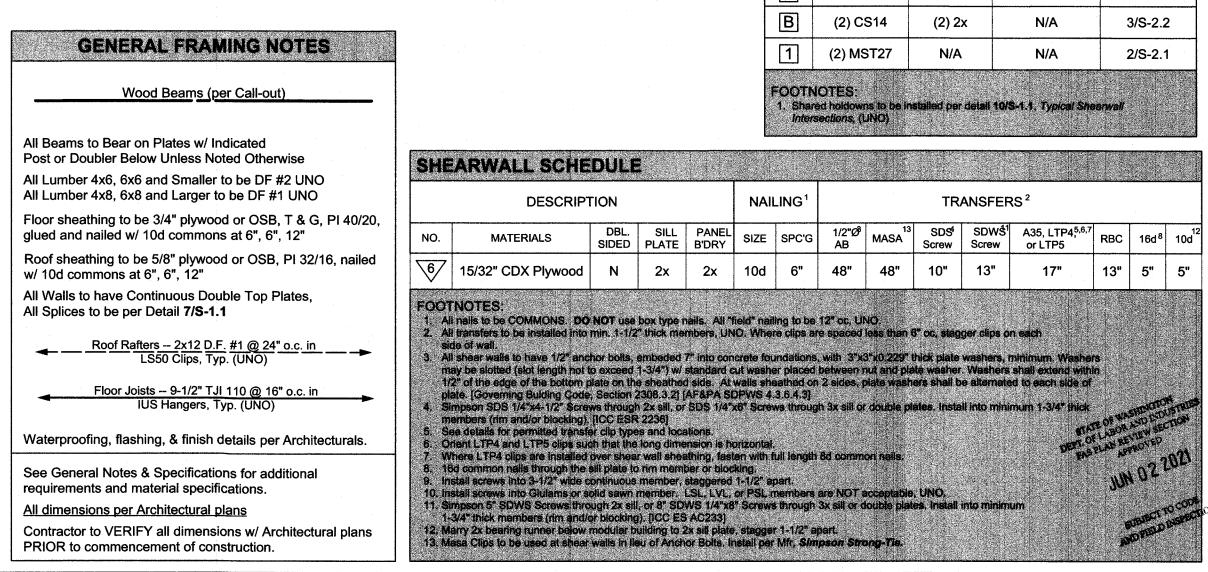

HOLDON

WN SCHEDULE
DLDOWN¹ MIN. POST ANCHOR / EMBEDMENT DETAILS
CS14 (2) 2x N/A 3/S-2.2
2) CS14 (2) 2x N/A 3/S-2.2
2) MST27 N/A N/A 2/S-2.1
ES:
TRANSFERS <sup>2</sup>
/2"Ø MASA 13 SDS SDWS A35, LTP4,56,7 RBC 16d8 10d2

Exhibit 7

Proj. Engr.: J. Christ Phone Ext.: 129 Proj. Mngr.: J. Denio Phone Ext.: 113 Date: 12 Apr. 2021 | Scale: 1/4"=1'-0" A&V Job No.: 21639

The use of these plans and specifications shall be

restricted to the original site for which they were prepared

Reproduction or publication by any method, in whole or in

part, is prohibited. Title to these plans and specifications

specifications shall constitute prima facie evidence of the

remain with Ashley & Vance Engineering, Inc. without

prejudice. Visual contact with these plans and

acceptance of these restrictions.

0

Engineer of Record:

and publication thereof is expressly limited to such use.

MODULAR FLOOR & ROOF FRAMING PLAN & DETAILS

(3) 1½" Deep, 3" Wide, V-Notches per Joist Bay	+ <sup>3"</sup> +	, /	of BN Btwn Ea. Notch
	9.75" Min. K		
Rim Beam per P	Plan —		
Jo	oists & Hangers—		
	per Plan		

RAFTERS TO FLUSH RIDGE BEAM

SLOPED ROOF RIM SHEAR TRANSFER

Ridge Vent per Arch, ----

1" Min. Cont. Gap

6

@ 48" o.c. Fully Nailed

of Rafter to Ridge

--- LS50 Clips Skewed, Ea. Side

Roof Boundary Nailing

Ridge Beams

Roof Rafters

per Plan

per Plan

ROOF VENT NOTCHING @ RIM BEAMS

### **Stephanie Keyser**

From: victor hung <victorhung@icloud.com>
Sent: Thursday, January 6, 2022 9:29 PM

**To:** Stephanie Keyser

**Subject:** 8417 NE 12th St. Tax Parcel Number 254070-0025

### Dear Stephanie,

I am a neighbor of Zijiang Yang (8417 NE 12th St, Tax Parcel Number 254070-0025) who is applying for variance for his DADU project that's not code-compliant.

The address of my house: 1034 84TH AVE NE, Medina, WA 98039

I am writing to you to voice our strong opposition to this variance application.

Our reasons for opposing this variance application are:

- Allowing such DADU variance will set a precedent and encourage many more similar DADU's that's not code-compliant in Medina. This will affect the overall living quality in Medina.
- From the drawings, the floor plan and layout of the DADU actually are for residential purposes and not for office. This looks like for future apartment rental or AirB&B.
- It's hard to believe that for such large house and there's no space for office.
- DADU's are very different then pool houses, sheds and detached garages. These are not for dwelling but DADU's are for dwelling. They are different.
- Access easement is very typical and shouldn't be a reason for variance. It was like this already before they bought the house.

Thank you.

Victor Hung 1034 84TH AVE NE, Medina

Sent from my iPad

### Stephanie Keyser

From: Tom Magnuson <tom.magnuson@hotmail.com>

Sent: Friday, January 7, 2022 1:39 PM

**To:** Stephanie Keyser

Cc:tdavidwei@gmail.com; peter.lian@sfacompanies.comSubject:RE: Variance at 8417 N.E. 12th N.E., applicant Ziziang Yang

### Dear Ms. Keyser:

I am sending this to you and understand it will be presented to the Hearing Examiner who is conducting the hearing on Thursday, January 15<sup>th</sup> at 10 a.m. I will contact to you to hopefully help me participate via ZOOM.

I am the residence occupant owner with a street address of 1036 84<sup>th</sup> Ave. N.E., Medina where I have lived for over ten years. This property is directly to the west of the applicant. We share a common fence which runs north and south. It is this fence that the applicant wishes to use as a reference for a variance reducing a thirty foot set back to sixteen feet for the placement of a 609 square foot detached structure. The grade of the properties is sloping to the west so my property and residence is lower that the applicant's. While I do not have elevations it stands to reason that my privacy will be compromised but that is only a part of my objection to a variance. The request for a variance is based upon a representation that the un attached structure is needed for office space in a residential area.

### My opposition is founded upon

- 1) The size of the unit which is larger than a semi trailer and the height of the unit itself being over thirteen feet before being placed upon a foundation;
- 2) The unit does not match nor blend in with other structures;

- 3) There are no non attached units in the area that required a variance;
- 4) In the past three years, and I have no information before that, there has been only one set back variance in Medina and that was for an open air cooking area. The application states that there are other properties with detached structures referencing pool and garage without providing particulars and listing no unit of the proposed size nor the fact that this structure has all the markings of living quarters;
- 5) The unit has been represented to be for an office however the unit is designed for living, ie. 50 gallon hot water heater, washer and dryer, kitchen with dishwasher, sink, disposal, stove and refrigerator and clothes closets. While two of the rooms say "office" there is one room designated as "living";
- 6) There is no showing that special circumstances warrant a variance. The Applicant agrees that the structure could be placed closer to the main dwelling. There is one tree that is not that large compared to other trees that might possibly need to be moved and the removal of the old small patio is of no significance;
- 7) There is no material hardship and the placement of the unit by the house will have no visibility from the street or lane;
- 8) The granting of a variance is detrimental to the neighborhood in setting a precedent. Whether the unit is built on site or pre fabricated makes no difference;
- 9) The figures given for relief are not material to granting a variance. Percentages of unit to lot size does not justify this action.

The applicant purchased the house after the start of the pandemic. Using the pandemic as rational for bypassing zoning requirements opens the floodgates to allow additional living quarters and other variance applications. If he needs to create additional office space or living quarters he should either remodel the existing quarters or find a different residence.

Applicant references MMC 20.34.020-2 which I could not locate. I did note MMC 16.34.020 titled Accessory Dwelling Units. Dwelling per dictionaries is defined as a place of residence, a self contained unit of accommodation, a place where one lives. I could not find a Medina code provision that allows a detached structure for use as an office. A accessory dwelling unit must be attached to the main structure (.020-A), are prohibited as the only use (.020-C), it must appear as a single family dwelling (.020E-3) and the exterior shall be identical to the residence (.020E-6).

The applicant is proposing a unit that makes said unit a dwelling unit. It contains a bathroom including a toilet, sink and shower or tub, and kitchen, etc. (MMC 16.34.020H). As such the unit could be used for living quarters and rental purposes.

The application for variance should be denied on many basis. The neighbors and community should be able to rely upon the code provisions. For myself I would not have purchased if there was such a proposed structure at sixteen feet from my property. The applicant has other options if he needs office space even if he doesn't use the space for living. Then what will the subsequent owner utilize this detached living quarters for? Granting a variance sets a terrible precedent.

Respectfully submitted. Tom Magnuson

### Sent from Mail for Windows

From: Stephanie Keyser

Sent: Wednesday, January 5, 2022 10:31 AM

To: Tom Magnuson

Subject: RE: Variance on N.E.12th

Need to

Hi Tom,

The entire structure will be 13'-5" from the ground. There are two windows on the rear of the structure as shown below:

I've been here for 3 years and can't think of a variance for a pre-fab accessory structure but we did have one for an outdoor kitchen that protruded into the rear setback. If you want us to look back, you'll need to create an account and submit a public records request online here: <a href="https://www.medina-wa.gov/centralservices/page/public-records-request">https://www.medina-wa.gov/centralservices/page/public-records-request</a>.

Let me know if you have questions! Stephanie

From: Tom Magnuson <tom.magnuson@hotmail.com>

Sent: Tuesday, January 4, 2022 3:57 PM

To: Stephanie Keyser <skeyser@medina-wa.gov>

Subject: Variance on N.E.12th

Stephanie: I misplaced the notice that pertains to adding an unattached structure at the resident located with a street address on I think N.E. 12<sup>th</sup>...same street just to east of Medina Chevron. My residence is between the station and the residence seeking the variance.

I am trying to determine the height of the proposed structure and whether from that structure there is visual access to my property. Also where would I gain information about other similar variance requests and application representations that there are other similar types of structures. I am not aware of pre manufactured and approximately 600 square feet structures.

Can you provide that type of information?

Thank you. Tom Magnuson (425) 698-1830

Sent from Mail for Windows

### **Stephanie Keyser**

From: David Wei <tdavidwei@gmail.com>
Sent: Sunday, January 9, 2022 8:25 AM

**To:** Stephanie Keyser

**Subject:** Testimony against P-21-089 Non-Administrative Variance

Dear Stephanie Keyser,

I am writing and emailing you my testimony against the following:

**Proposal:** Request for a non-administrative variance to reduce the rear yard setback from

30-feet to 16-feet to accommodate an accessory structure

**Fie No.** P-21-089 Non-Administrative Variance

**Applicant:** Chris Hall (agent)

Zijiang Yang (owner)

Site Address: 8417 NE 12<sup>th</sup> Street

My name is Tsao-Feng Wei, I go by David Wei. My house address is 8421 NE 12<sup>th</sup> Street adjacent to the site of 8417 NE 12<sup>th</sup> Street. I and my wife own the property (8421) and my family have been residents of the house for more than 24 years since December, 1997.

### **Testimony:**

My concerns and objection to the applicant's request for variance to reduce the rear yard setback from 30-feet to 16-feet to accommodate an accessory structure as the following:

- **1.** The request for variance is invalid: The site plan proposed by the applicant has only 11'-6" from the property line between the applicant's property and mine. It is obviously an invalid request for variance to reduce the rear yard setback from 30-feet to 16-feet which is non-compliant to City code of land use.
- **2. Pandemic is not persistent:** The applicant's sole reason to accommodate an accessory structure for office use due to COVID Pandemic is non-logical and has created reasonable doubts of its purposes to be for permanent use if it is constructed. Should it be removed after post Endemic?
- **3.** Office setting is conceivable within existing structure: The applicant can have an office setting like millions of people working from home (WFH). For instance, I personally and my son have been WFH for Boeing and Microsoft since COVID Pandemic began in March, 2020. We could facilitate office settings properly and manage to do so without issues in my house for nearly two years.
- **4. Conserving wildlife habitats:** I have seen many generations after generations of wildlife such as rabbits and squirrels appearing in my backyard and frontyard for more than two decades. They are very lovely. The proposal of an accessory structure by the applicant raises my concerns of impacting the existing wildlife habitats.
- **5. Preserve quality and safety of living:** Medina City has been doing a great job of sustaining good quality and safety of living for city residents. We have a beautiful beach next to City Hall and a great Medina Park where people are enjoying the places so much! Enforcing City codes without too many exemptions for residentials to keep clean and green is important too. Way to Go!

Best regards,

David Wei

iPhone: 425-647-0820 landline: 425-456-0626