

**PLANNING & ZONING**  
**April 03, 2025**  
**5:30 PM**  
**City Hall**



**Chairman:**  
John Gudger  
**Vice Chairman:**  
Chris Volzke  
**Members:**  
John Bryson  
Nick Sterling  
Robin Baye

**AGENDA**  
**MILLS CITY PLANNING COMMISSION**

---

*ITEMS ON THIS AGENDA ARE SUBJECT TO A PUBLIC HEARING BEFORE THE CITY COUNCIL FOR FINAL ACTION*

**CALL TO ORDER**

**CONSENT AGENDA**

**Minutes**

- [1.](#) Approval of minutes from March 6, 2025

**AGENDA ITEM**

- [2.](#) 25.02 DEV – Cross Country Freight Development Plan

**PUBLIC COMMENT** - Public comment is a time when citizens may bring forth items of interest or concern that are not on the agenda. Please note no formal action will be taken on these items during this time. However, they may be scheduled on a future posted agenda if action is required.

**ADJOURNMENT**

**AGENDA SUBJECT TO CHANGE WITHOUT NOTICE**

**NEXT MEETING** - May 1, 2025 at 5:30 pm

In accordance with the Americans with Disabilities Act, persons who need accommodation in order to attend or participate in this meeting should contact City Hall at 307-234-6679 within 48 hours prior to the meeting in order to request such assistance.

**Board Members Present:** John Gudger, Chris Volzke, John Bryson and Robin Baye were present for the P&Z Meeting. Member Nick Sterling was absent.

**City Staff in Attendance:** City Planner Megan Nelms, Building Inspector Kevin O’Hearn, Sabrina Kemper, Community Development Director and Mayor Leah Juarez

Chairman John Gudger called meeting to order at 5:31pm on March 6, 2025, as a quorum was present.

Chairman Gudger asked if everyone had a chance to read the minutes from the previous meeting on February 6, 2025. Board Member John Bryson made a motion to approve the minutes. Board Member Robin Baye seconded the motion. Chairman Gudger called for a vote to pass the minutes of the February 6, 2025 P&Z meeting. All ayes, motion passed.

Chairman Gudger introduced the first item on the agenda, the Vinich Development Plan, and asked for a motion to remove the item from the table. Board Member Volzke made a motion to remove the item from the table, Board Member John Bryson seconded the motion. Chairman Gudger asked Megan for a staff report. Megan provided an overview of the case, 25.01 DEV. The applicant is proposing to construct additions to an existing commercial shop building on Lot 2A, Sage Addition. The existing building is approximately 3,750 sf in size and the application proposes future additions of 3,600 sf on the north side of the existing structure and a second addition of 1,710 sf on the south side. The property is located on the northwest corner of the intersection of Chamberlin Rd and Pontiac St.

Megan provided an overview of the easement which was recorded in 1948 in favor of the United States of America. Shawn Gustafson was in attendance representing the applicant. He stated the easement was not a viable easement and no longer existed although there are not timelines for easements to exist. Chairman Gudger asked if the Bureau of Reclamation was contacted regarding this easement. Mr. Gustafson stated no, they were not contacted. Megan asked Shawn if they ever contact One Call to ensure there is nothing in the easement. Shawn stated they do at times but did not in this case.

Megan then provided a summary of the planning considerations for the development plan application:

**Planning Considerations:**

1. Submit an exterior lighting plan per Section 40.35(4) showing the location and types of lighting for the building, along with manufacturer's specifications.
2. Per Section 40.10(6) all required parking spaces and all driveways, entrances and exits from the parking area shall be paved with asphalt, concrete or similar permanent surface.
  - a. Nine (9) parking spaces are required. 14 are shown on the development plan with asphalt surfacing. This meets the intent of the regulations.
3. Submit a final drainage plan
4. Show all existing easements on the site plan.
5. Enter into an approved Site Plan Agreement upon approval of the Development Plan.

6. Obtain all required building permits for:
  - a. All site lighting
  - b. All on-premise signage.

**Staff Recommendation:**

Staff recommends approval of the Development Plan pending completion of all planning considerations and recommends the Planning Commission make a do-pass recommendation on the application to City Council.

Chairman Gudger asked Megan about specific lighting wallpacks. Megan stated yes, it is noted on the plan they still need to provide the specifics on the proper shielding of the lighting. The development plan notes that exterior lighting will be on the building, with no proposed parking lot illumination. Specifications for the types of exterior lighting for the building still need to be provided. Board members discussed current setbacks and clarified final plans on where the actual building is being built.

Chairman Gudger then asked if there was any other discussion. There were no further questions or discussion. Chairman Gudger asked for a motion. Board Member Bryson made a motion to approve based on board discussion and staff recommendations. Board Member Baye seconded the motion. All ayes, motion passed.

Chairman Gudger introduced the next item on the agenda, the Boatright Addition No. 3 Final Plat and asked Megan to provide a staff report. Megan reviewed the requested replat. This is being requested so the City of Mills can potentially build a bike trail along this route. Megan stated some cosmetic changes needed to be fixed on the plat. Chairman Gudger asked about public access to this area, Megan stated it could be accessed off of Bear Pen Rd. Sabrina Kemper was in attendance to explain this part of the pathway is needed to connect two other city owned pieces of property and to complete the bike trail design and engineering. Safety crossing Bear Pen was discussed and this is depicted on the actual engineered plans, not on the plat.

**Planning Considerations:**

1. Provide a vacation statement on the plat face.
2. Remove the signature line for the Planning Commission and replace it with City Planner.
3. Add a 5' general utility easement to the south and west parcel boundary lines.
4. Cosmetic changes to the plat:
  - a. Bold the subdivision boundary
  - b. Add a line legend
5. Survey Reviews:
  - a. Per the Land Development Regulations, all major corners of a subdivision shall be marked with brass caps. There appear to be three (3) corners within the subdivision that need to be replaced with brass caps.

**Staff Recommendation:**

Megan stated that staff recommends APPROVAL of the final plat upon all planning considerations being completed and for the Planning commission make a “Do Pass” recommendation on the Final Plat application.

Chairman Gudger then asked if there were any questions from the commission. Vice Chairman Volzke motioned to approve the plat upon meeting all recommendations. Board Member Baye seconded the motion. All ayes, motioned passed.

Chairman Gudger introduced the last item on the agenda, Land Development Regulations Updates and asked for a review from Megan. She stated that no action or decision is being asked at this time but it is a good time to update the regulations as they have been in place of almost one year and there have been some issues to note and change. There are some minor formatting issues and some clarification issues that need to be addressed. Extensive discussion ensued about notification requirements, distances for notifications and what notifications are required. Board Members discussed notifying property owners within a 500 foot radius for an industrial, commercial or multi-family site development plan. The regulations currently do not require any notifications for this. Board members ultimately agreed a 300’ notification was appropriate and would like council to approve this for planned development so property owners are aware of what is going on in their neighborhoods.

With no other business, Chairman Gudger adjourned the meeting at 6:53pm.

---

John Gudger, Chairman

---

Attest: Sarah Osborn, City Clerk

**Cross Country Freight  
Industrial Warehouse**

**Commercial Site Plan**

**Planning Commission Meeting**  
April 3, 2025

**City Council Meeting**

**Applicants:** NAP Nebraska, LLC

**Case Number:** 25.02 DEV

**Agent:** Dave Swinney, Caspar Building Systems

**Summary:** The applicant is proposing to construct a 4,375 square foot warehouse with associated loading docks and areas for a commercial transportation business.

**Legal Description:** Lots 11 & 12, Opportunity Subdivision

**Location:** The property is located off TKS Ct just west of Salt Creek Hwy. The rear of the lots adjoins the intersection of Salt Creek Hwy and MJB Rd.

**Current Zoning:** I-1 (Light Industrial)

**Adjacent Land Use:** North: Opportunity Subdivision (I-1)  
South: Tank Farm Industrial Park (I-1)  
East: Opportunity Subdivision (I-1) & Salt Creek Hwy  
West: Opportunity Subdivision (I-1)

**Applicable Land Development Regulations**

Section 10.40 of the Mills LDRs provides the review criteria for the approval of a Development Plan. Those criteria include whether the site plan complies with all applicable regulations and if the development requires any additional site and design considerations. The proposed development should not create conflicts with vehicle, bicycle or pedestrian circulation and the Commission and/or City Council may require modifications, or condition plans, to ensure specific design features and conformance with all applicable standards.

**Summary:**

A Development Plan application has been submitted for construction of an industrial transportation warehouse. The site encompasses two lots totaling just under 5.0-acres; however no structures are planned across the lot line and all required setbacks from structures are met. The property is zoned I-1 (Light Industrial).

## **Planning Considerations:**

1. Per Section 40.40 of the LDRs, a minimum of 4% of the site must be landscaped. Undisturbed, natural vegetation areas do not count towards required landscaping. The applicant has shown a landscaped area at the front of the proposed warehouse. Provide additional information:
    - i. Revise the total area proposed to be landscaped on the site plan checklist
    - ii. Summary narrative of landscaping plan
    - iii. List of materials to be used in landscaping
  2. Provide a final pavement design report for all parking and loading areas.
  3. Enter into an approved Site Plan Agreement upon approval of the Development Plan.
  4. Obtain all required building permits for construction, including all site lighting and on-premise signage.
  5. A single address will be assigned after approval of the site plan.
- 

### **Staff Recommendation:**

Staff recommends APPROVAL of the development plan upon all planning considerations being completed.

### **Planning Commission Recommendation:**

### **City Council Decision:**



**CITY OF MILLS**  
**APPLICATION FOR SITE PLAN APPROVAL**  
 Pursuant to the City of Mills Zoning Ordinance



Item # 2.

City of Mills, Wyoming  
 704 4<sup>th</sup> Street (Physical Address)  
 P.O. Box 789 (Mailing Address)  
 Mills, Wyoming 82644

Date: 3/10/2025  
 Return by: 3/13/2025  
 (Submittal Deadline)  
 For Meeting on: 4/3/2025

**PLEASE PRINT**

**SINGLE POINT OF CONTACT:** Dave Swinney

**APPLICANT/PROPERTY OWNER(S) INFORMATION:**

Print Owner Name: NAP NEBRASKA LLC  
 Owner Mailing Address: 1929 HANCOCK DR  
 City, State, Zip: BISMARCK ND 58501  
 Owner Phone: 701-222-8498  
 Applicant Email: Cthomas@CCFS.com

**AGENT INFORMATION:**

Print Agent Name: Caspar Building Systems  
 Agent Mailing Address: 1975 Old Salt Creek Hwy  
 City, State, Zip: Casper, WY 82601  
 Agent Phone: 307-258-0459  
 Agent Email: dswinney@casparbuildingsystems.com

**PROPERTY INFORMATION:**

Subject property legal description (attach separate page if long legal): Lots 11 & 12, Opportunity Subdivision, City of Mills, Wyoming  
 Physical address of subject property if available: 999 TKS Road, Mills, Wyoming  
 Size of lot(s) sq. ft/acres: Lot 11: 1.844 Acre, Lot 12: 3.145 Acre  
 Current zoning: I-L Current use: Undeveloped  
 Intended use of the property: Warehouse  
 Zoning within 300 feet: I-L Land use within 300 feet: Undeveloped, Storage, Heavy Equipment Dealer

**ATTACHMENTS (REQUIRED):**

1. **Proof of ownership:** X  
 (such as deed, title certification, attorney's title opinion)
2. **Seven (7) full sized copies of the Site Plan:** \_\_\_\_\_
3. **One reproducible 11 x 17 Site Plan hard copy:** \_\_\_\_\_
4. **One Site Plan electronic copy (pdf):** \_\_\_\_\_

**IF APPLICABLE, INCLUDE:**

1. Number of employees on the premises: 5
2. Building occupant loading (if recreational, entertainment, place of assembly, a facility or building of similar nature): N/A
3. Number of residential units: N/A
4. Number of off-street parking spaces **provided:** 20
5. Number of off-street parking spaces **required:** 10

**SIGNATURE(S):**

The following owner's signature signifies that all information on this application is accurate and correct to the best of the owner's knowledge; and that the owner has thoroughly read and understands all application information and requirements. [In addition to the owner's signature(s), if an agent of the owner is to be the contact for all communications relating to this application, please have the agent sign below.]

I (We) the undersigned owner(s) of the property described above do hereby make application to the City of Mills as follows:  
Development of a warehouse facility.

OWNER Signature

OWNER Signature \_\_\_\_\_

AGENT Signature














**FEE:** \$10.00 per dwelling unit with a \$250.00 minimum and a \$1000.00 maximum; **plus a recordation fee of \$150.00.**

**For Office Use Only:** Signature verified: \_\_\_\_\_ Proof of ownership provided: \_\_\_\_\_ Fee Paid: \$ \_\_\_\_\_

# Cross Country Freight Development Plan – Lots 11 & 12, Opportunity Subdivision



## Mills Zoning Districts

 Mills, C-1: General Commercial	 Mills, O-B: Office Business District
 Mills, C-3: Business Service District	 Mills, R-1: Single Family Dwelling District
 Mills, I-1: Light Industrial	 Mills, R-2: One and Two Family Dwelling District
 Mills, I-2: Heavy Industrial	 Mills, R-3: Multiple Family Dwelling District
 Mills, M-H: Manufactured Home District	 Mills, UA: Urban Agriculture
 Mills, M-P: Manufactured Home Park	 Mills, UR: Urban Agriculture Residential
 Mills, PLI: Public Land Institutions	



# SITE PLAN SUBMITTAL

# CROSS COUNTRY FREIGHT

# 999 TKS COURT

## MILLS, WYOMING

### SITE PLAN CHECKLIST

1. Legal description and common address(es) of the proposed site: LOTS 11 AND 12, OPPORTUNITY SUBDIVISION, CITY OF MILLS
2. Title block stating name of project, designer, and address and telephone number of designer:  
PROJECT: CROSS COUNTRY FREIGHT  
CONTRACTOR: CASPAR BUILDING SYSTEMS, INC  
1975 OLD SALT CREEK RD  
CASPER, WY 82601  
CIVIL ENGINEER: WLC ENGINEERING & SURVEYING, INC  
200 PRONGHORN ST  
CASPER, WY 82601
3. Names of all abutting property owners if other than the petitioner: AS SHOWN
4. Surrounding land uses, buildings, and zoning on all abutting sides, including those lands separated from the land under consideration by a street, alley, or other roadway: AS SHOWN
5. Current zoning of the land under consideration and proposed zoning, if applicable:  
CURRENT ZONING: I-L  
PROPOSED ZONING: I-L
6. North arrow, scale of site plan at a scale of 1"=10' or a multiple thereof, and date site plan was prepared: AS SHOWN
7. Land area dimensions: AS SHOWN
8. Dimensions of all setbacks and heights of all proposed buildings: AS SHOWN
9. Location and dimensions of all proposed off-street loading dock areas, including street access and traffic flow, to these areas: AS SHOWN
10. Location of all trash receptacles: AS SHOWN
11. Locations and types of all advertising signs and fences: AS SHOWN
12. Any screening or screening devices used to minimize or eliminate areas which tend to be unsightly: NONE PROPOSED
13. Locations of existing and proposed exterior lighting, heights of poles, and size and number of fixtures: AS SHOWN. WALL PACKS ON THE BUILDING.
14. Names and widths of all adjacent streets, dimensions and location of all public and private roadways, streets, or driveways, both paved and unpaved, including right-of-way, pavement width, and proposed uses of right-of-way: AS SHOWN
15. Location and dimensions of existing and proposed curb cuts and sidewalks: AS SHOWN
16. Off-street parking spaces, locations and dimensions, layout, traffic control, compact and handicap parking spaces, including all surface markings such as directional arrows: AS SHOWN
17. Location of all wheel stops, bumper guards, and curbing warranted by topography or traffic and pedestrian circulation: NONE PROPOSED.
18. Types of ground or yard surfacing throughout, grass, paving, gravel, etc: AS SHOWN
19. Existing and proposed easements: AS SHOWN
20. Vicinity/Location map at a scale of 1"=600' clearly indicating the location of the land in question with respect to a larger recognizable area: AS SHOWN
21. General notes to include a summary table on the site plan:
  - a. Total land area in acres or square feet: 4.99 AC
  - b. Total building footprint in square feet: PROPOSED 4,375 SF
  - c. Total square feet of building addition: N/A
  - d. Percentage of land covered by buildings: 2%
  - e. Building height(s): SEE ELEVATIONS
  - f. Number of stories and total square footage of leaseable space: ONE STORY, 4375 SF
  - g. Total number of parking spaces: 5 REGULAR, 2 HANDICAPPED, 13 TRACTOR-TRAILER SPOTS
  - h. Square footage of parking areas(s): 125,900 SF
  - i. Percentage of land covered by parking: 58%
  - j. Square footage of all landscaped areas: 84,425 SF
  - k. Percentage of site covered by landscaping: 40%
22. Numbering of items on the site plan to correspond to items on this checklist: AS SHOWN
23. Existing and proposed contours: AS SHOWN
24. Elevations of the building(s) to be constructed (front, rear, side): SEE ARCHITECTURAL DRAWINGS
25. Surface drainage plans for sites at ten thousand (10,000) square feet or more:
26. Pavement design report for parking areas:
27. Traffic study (if required by the City Engineer, Planning Staff, Planning and Zoning Boards or City Council): NONE PROPOSED

- RECOVERED BRASS CAP
- RECOVERED ALUM. CAP
- RECOVERED REBAR
- RECOVERED IRON PIPE
- RECOVERED CORNER
- ⊙ EX SIGN
- EX MONITOR WELL
- EX TREE
- ⊙ EX BUSH
- ◆ EX BORE HOLE
- ⊙ EX TV PEDESTAL
- ⊙ EX TV RECEIVER
- ⊙ EX GAS METER
- EX GAS VALVE
- EX GAS RISER
- ➔ EX PIPELINE MARKER
- ⊙ EX TEST LEAD
- EX POWER POLE
- ⊙ EX POWER TRANSFORMER
- ⊙ EX CATHODIC TEST
- EX GUY POLE
- ↑ EX GUY ANCHOR
- EX SWITCH POLE


- ⊙ EX ELECTRIC METER
- EX ELECTRIC VAULT
- EX CONDUIT RISER
- ⊙ EX SANITARY MANHOLE
- EX SANITARY CLEANOUT
- EX SEPTIC CLEANOUT
- EX STORM MANHOLE
- EX STORM INLET
- ➔ EX TELEPHONE MARKER
- ⊙ EX TELEPHONE PEDESTAL
- EX TELEPHONE MANHOLE
- EX TELEPHONE PULLBOX
- EX TRAFFIC SIGNAL
- EX TRAFFIC CONTROL BOX
- ⊙ EX WATER VALVE
- ⊙ EX FIRE HYDRANT
- EX CURB STOP
- EX SPIGOT
- ⊙ EX WATER METER
- EX SPRINKLER VALVE BOX
- EX SPRINKLER HEAD
- ⊙ EX WATER MANHOLE
- ⊙ EX GAS PUMP
- PROP SANITARY PUMP

### LEGEND

- PROPERTY BOUNDARY
- X-X-X- FENCE
- ⊙ ROAD
- EX EDGE ASPHALT
- EX EDGE CONCRETE
- EX EDGE GRAVEL
- EX FLOWLINE
- EASEMENT
- 5280 EX CONTOUR MAJOR
- 5281 EX CONTOUR MINOR
- FO-FO-FO EX FIBER
- EX PIPELINE
- G-G-G EX GASLINE
- P-P-P EX POWERLINE
- ST EX STORM SEWER
- SA EX SANITARY SEWER
- T-T-T EX TELEPHONE
- W EX WATERLINE
- C-C-C EX CABLE TV
- OP-OP-OP EX OVERHEAD POWER
- X-X-X- CHAIN LINK FENCE
- PROP EDGE ASPHALT
- PROP EDGE CONCRETE
- 5280 PROP CONTOUR MAJOR
- 5281 PROP CONTOUR MINOR
- G-G-G PROP GASLINE
- P-P-P PROP POWERLINE
- ST PROP STORM SEWER
- FM PROP SANITARY SEWER
- W PROP WATERLINE



LOCATION & VICINITY MAP  
SCALE: 1"=1000'

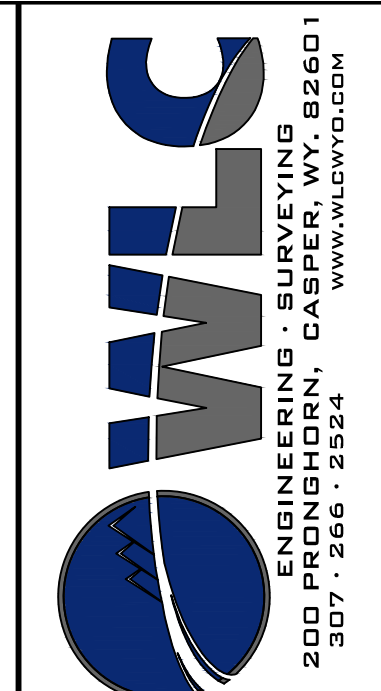


Drwg. By: JLM W.O. No.: 18041  
 Chk. By: FCF Book No.:  
 Acad File: CCF DESIGN\_CURRENT.Bwg  
 FOR: CASPAR BUILDING SYSTEMS  
 1975 SALT CREEK HWY  
 CASPER, WY 82601

### REVISIONS

NO.	DESCRIPTION

CROSS COUNTRY FREIGHT  
SITE PLAN COVER

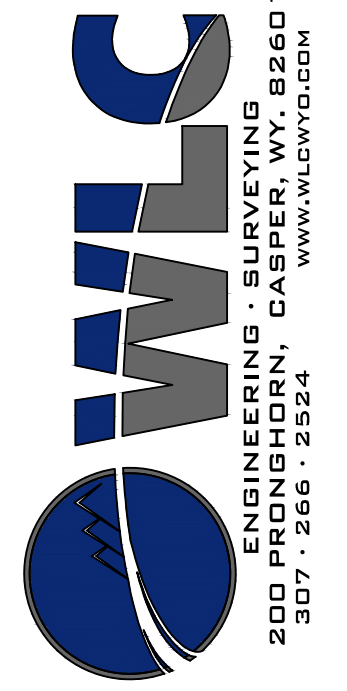


Drawn By: JLM W.O. No.: 1804-1  
Chk. By: FGF Book No.:  
Acad File: CCF DESIGN\_CURRENT.Bwg  
FOR: CASPAR BUILDING SYSTEMS  
1975 SALT CREEK HWY  
CASPER, WY 82601

REVISIONS

CROSS COUNTRY FREIGHT  
SITE PLAN

SHEET NO.  
2 OF 2  
DATE:  
3/10/25

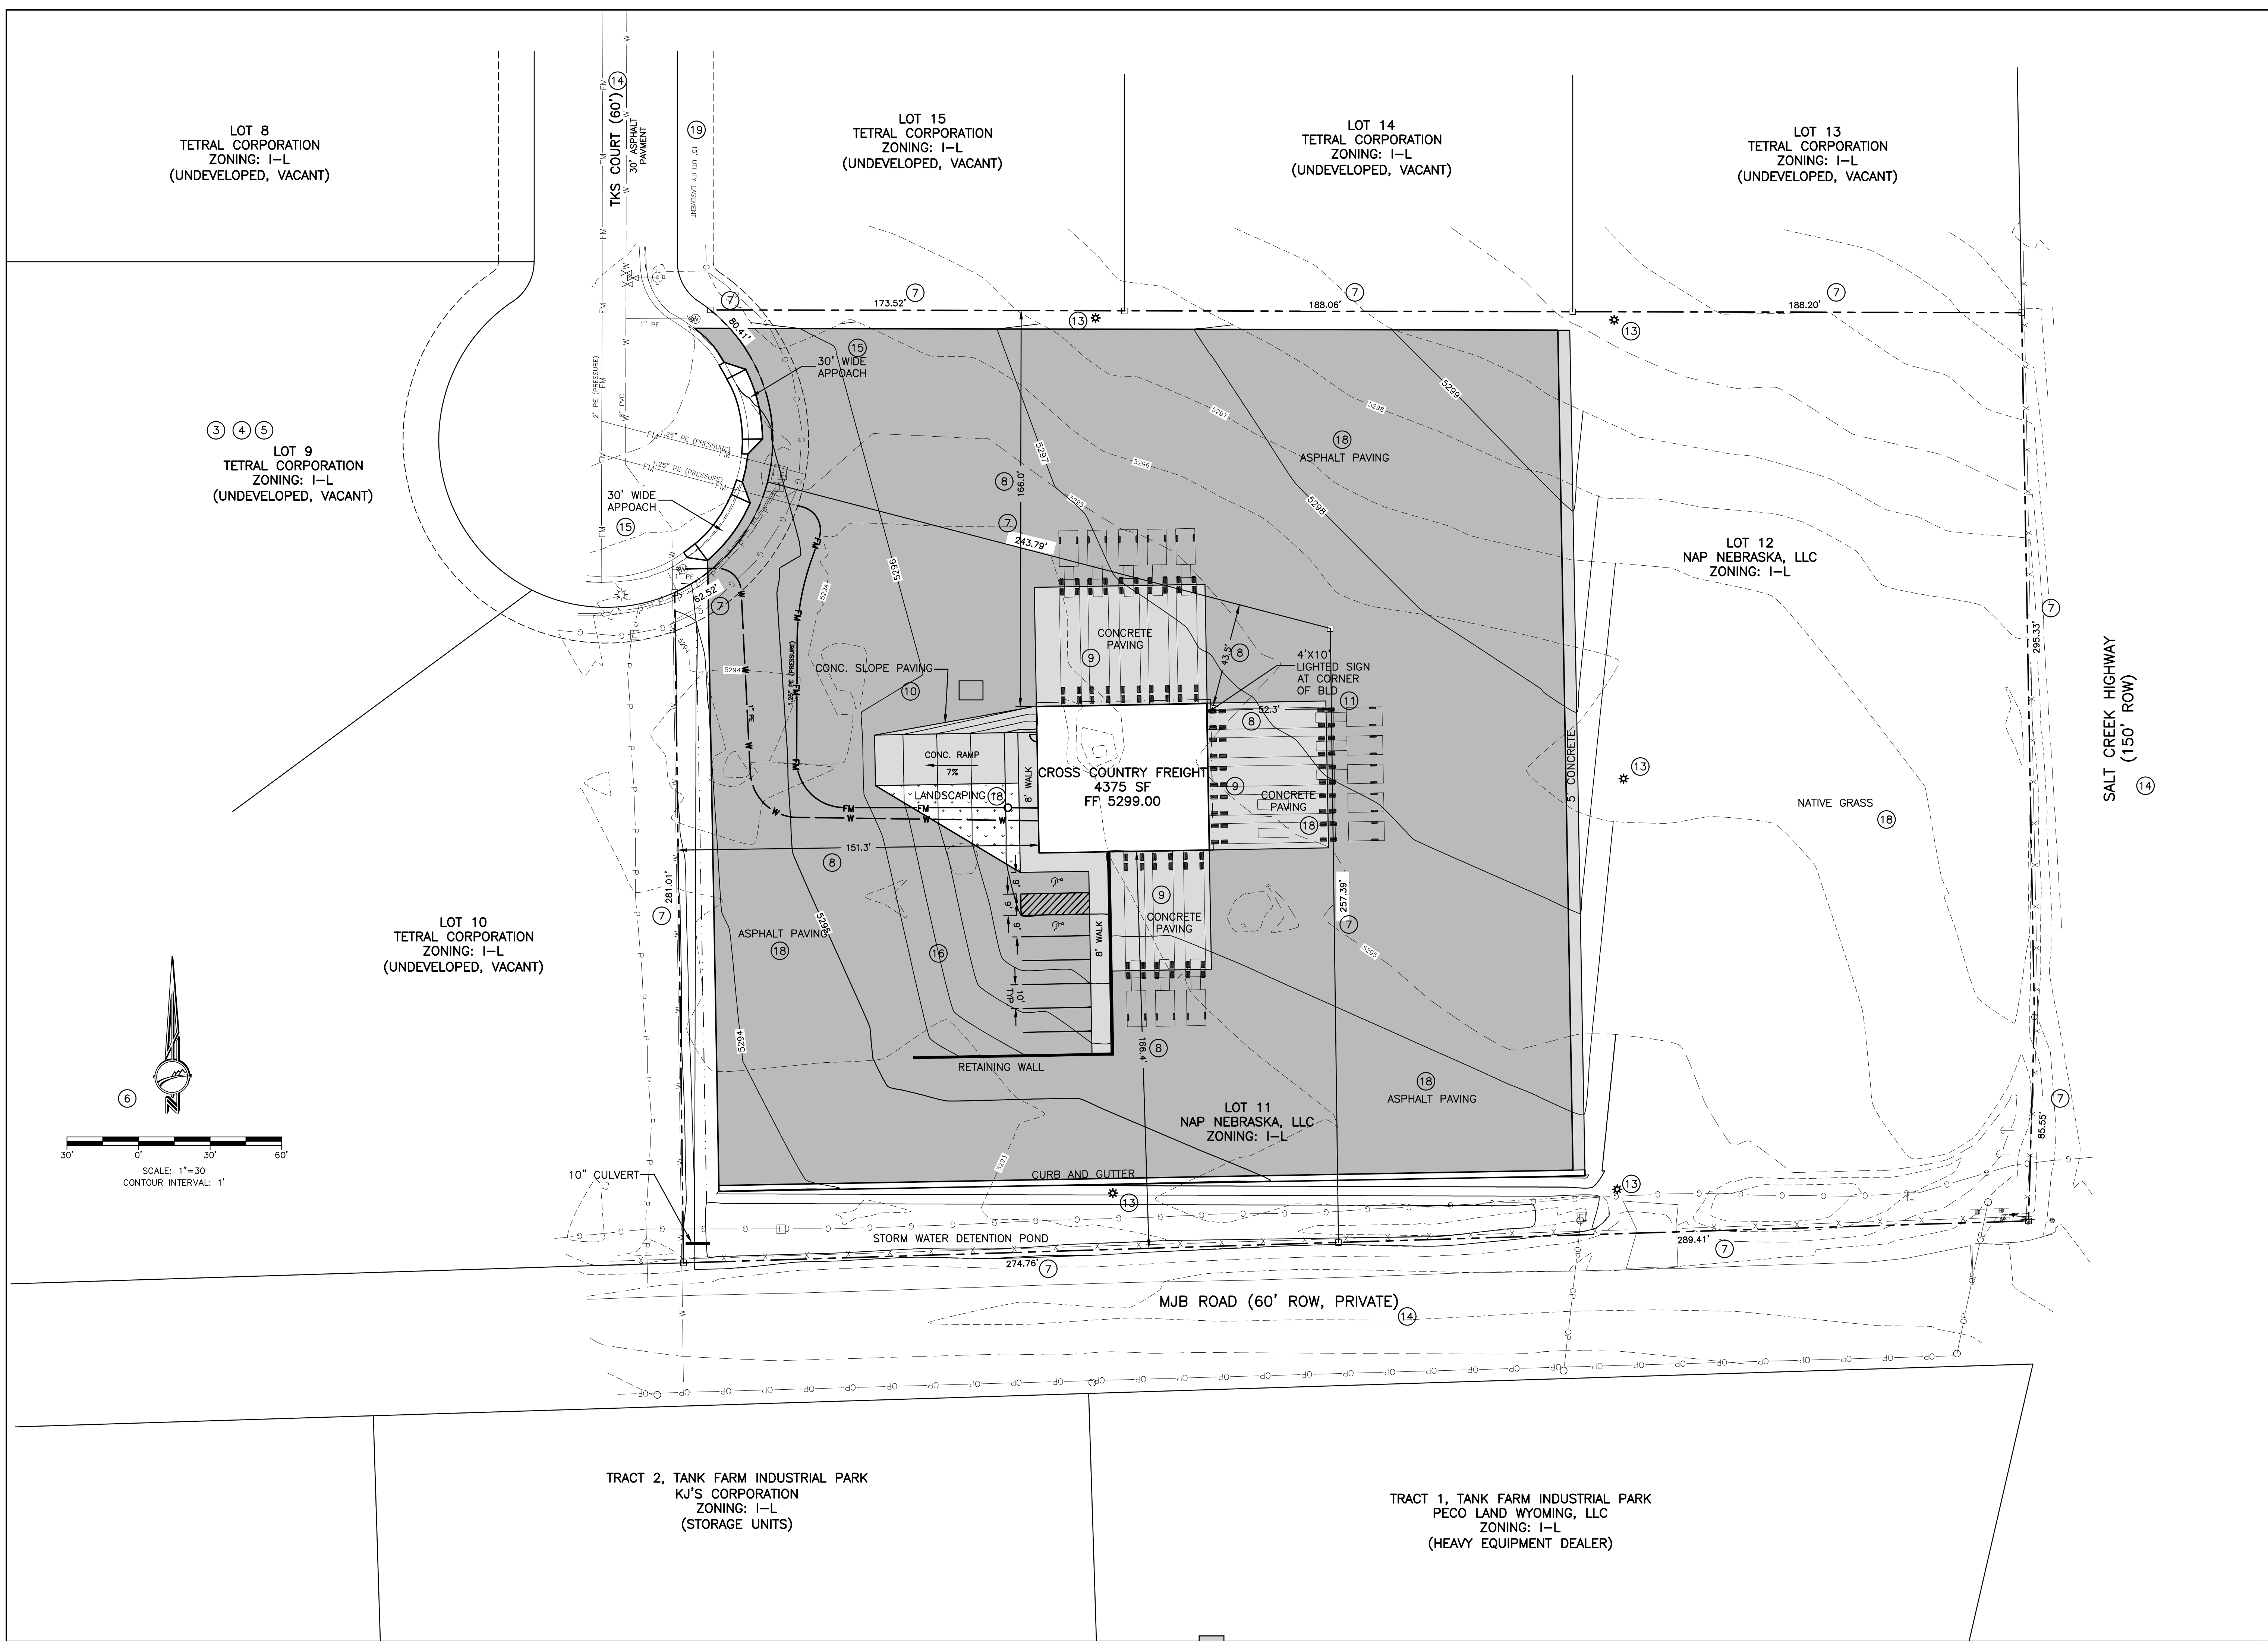

LOT 8  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

LOT 15  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

LOT 14  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

LOT 13  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

LOT 9  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

LOT 12  
NAP NEBRASKA, LLC  
ZONING: I-L


LOT 10  
TETRAL CORPORATION  
ZONING: I-L  
(UNDEVELOPED, VACANT)

CROSS COUNTRY FREIGHT  
4375 SF  
FF 5299.00

LOT 11  
NAP NEBRASKA, LLC  
ZONING: I-L

TRACT 2, TANK FARM INDUSTRIAL PARK  
KJ'S CORPORATION  
ZONING: I-L  
(STORAGE UNITS)

TRACT 1, TANK FARM INDUSTRIAL PARK  
PECO LAND WYOMING, LLC  
ZONING: I-L  
(HEAVY EQUIPMENT DEALER)

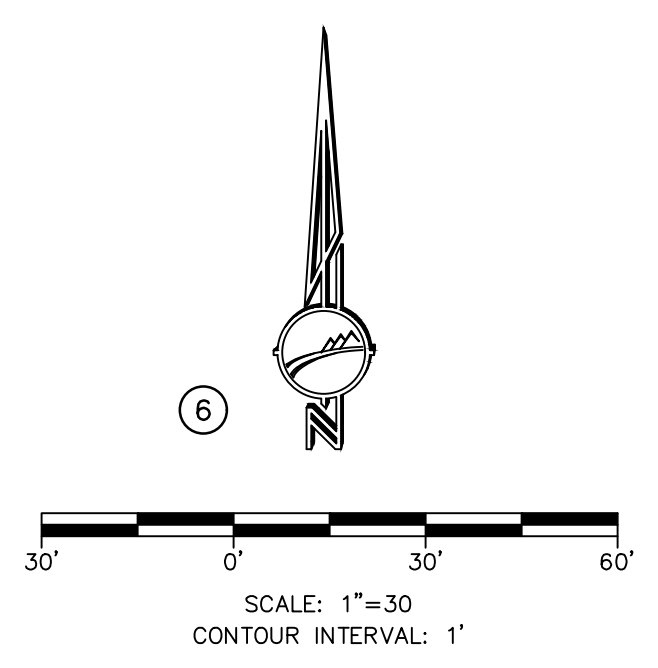

New Warehouse for:  
**Cross Country Freight**  
Lots 11 & 12, Opportunity Subdivision, Mills, Wyoming


Job No. 24-CCFS  
Date: 2/28/2025  
Drawn By: JCB

REVISIONS


EXTERIOR ELEVATIONS

**A201**


COPYRIGHT HEINBOND LLC

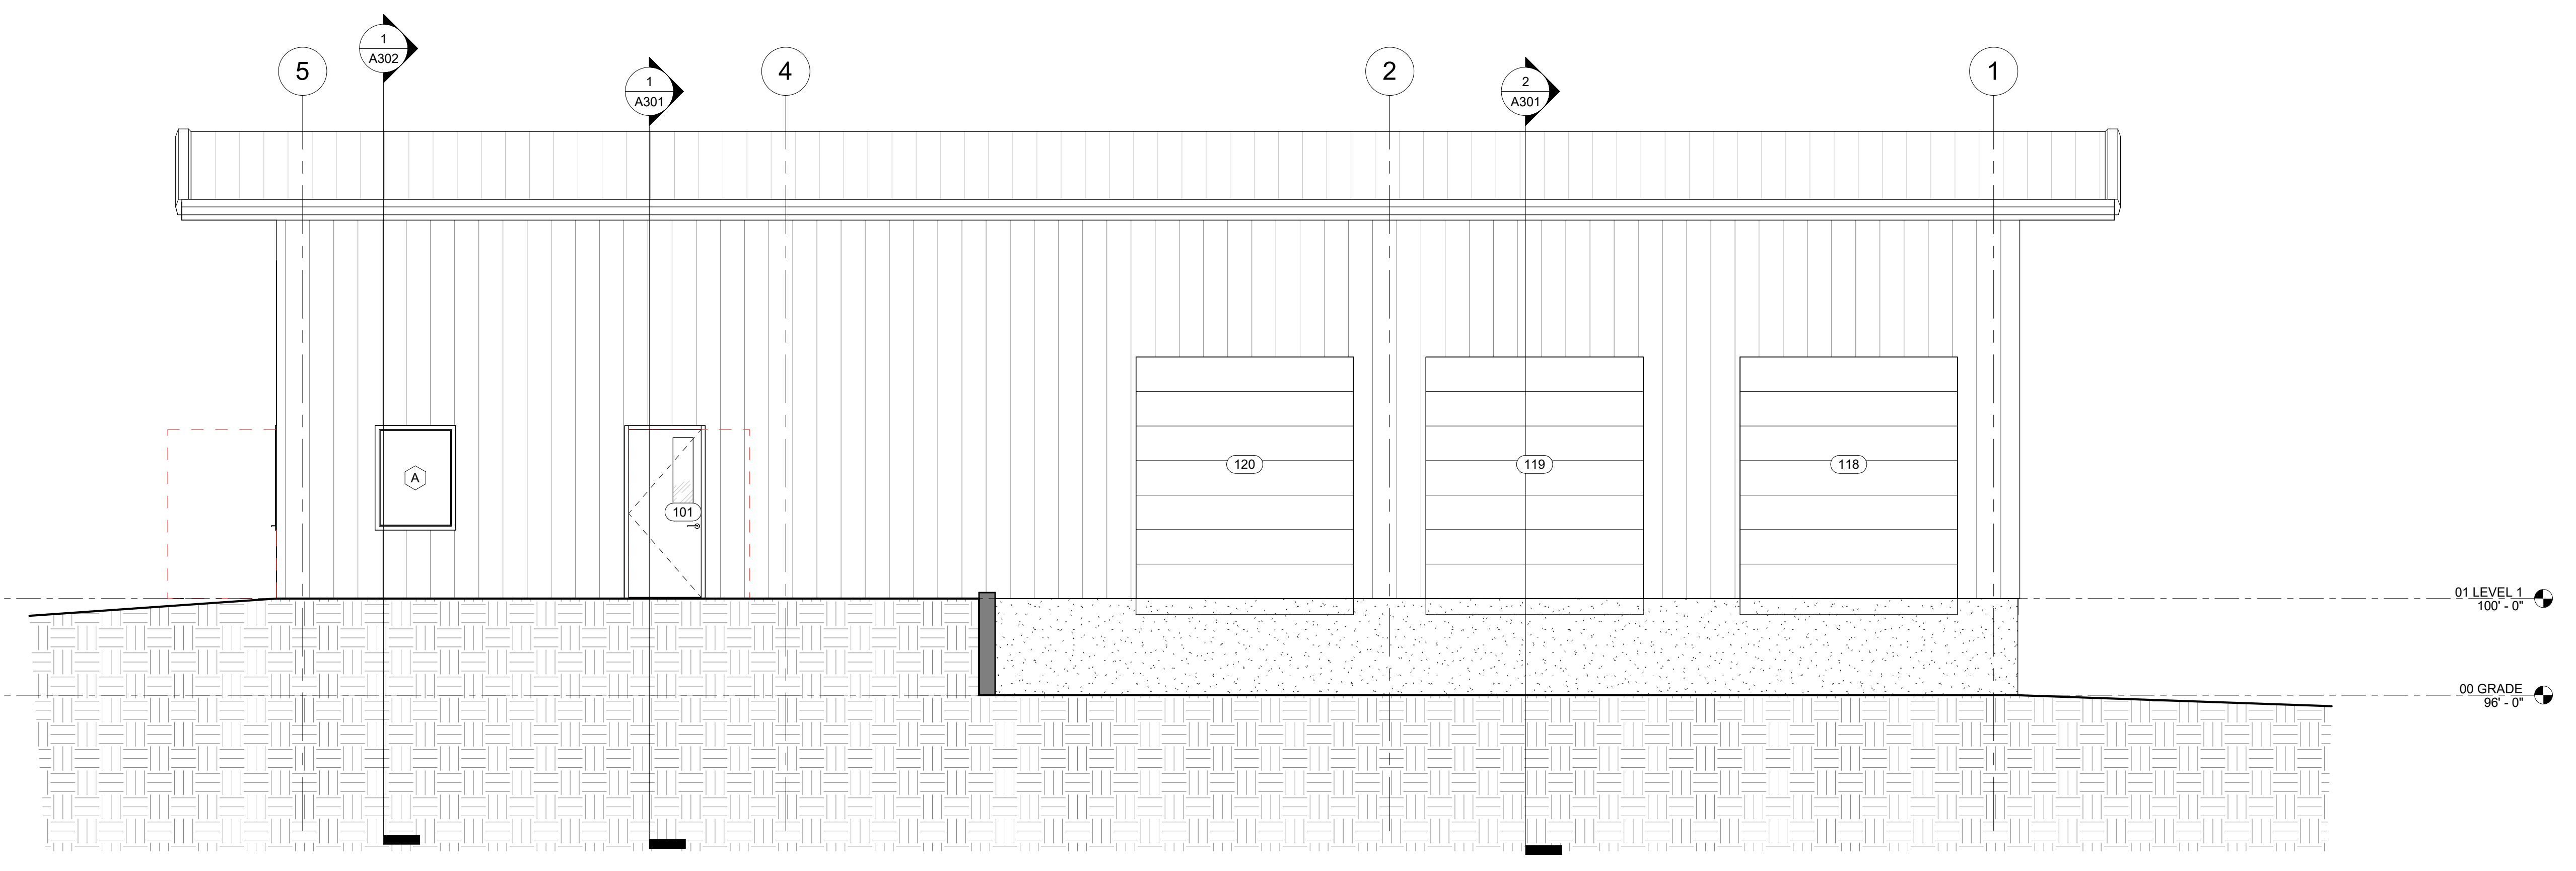

1 SOUTH ELEVATION  
1/4" = 1'-0"

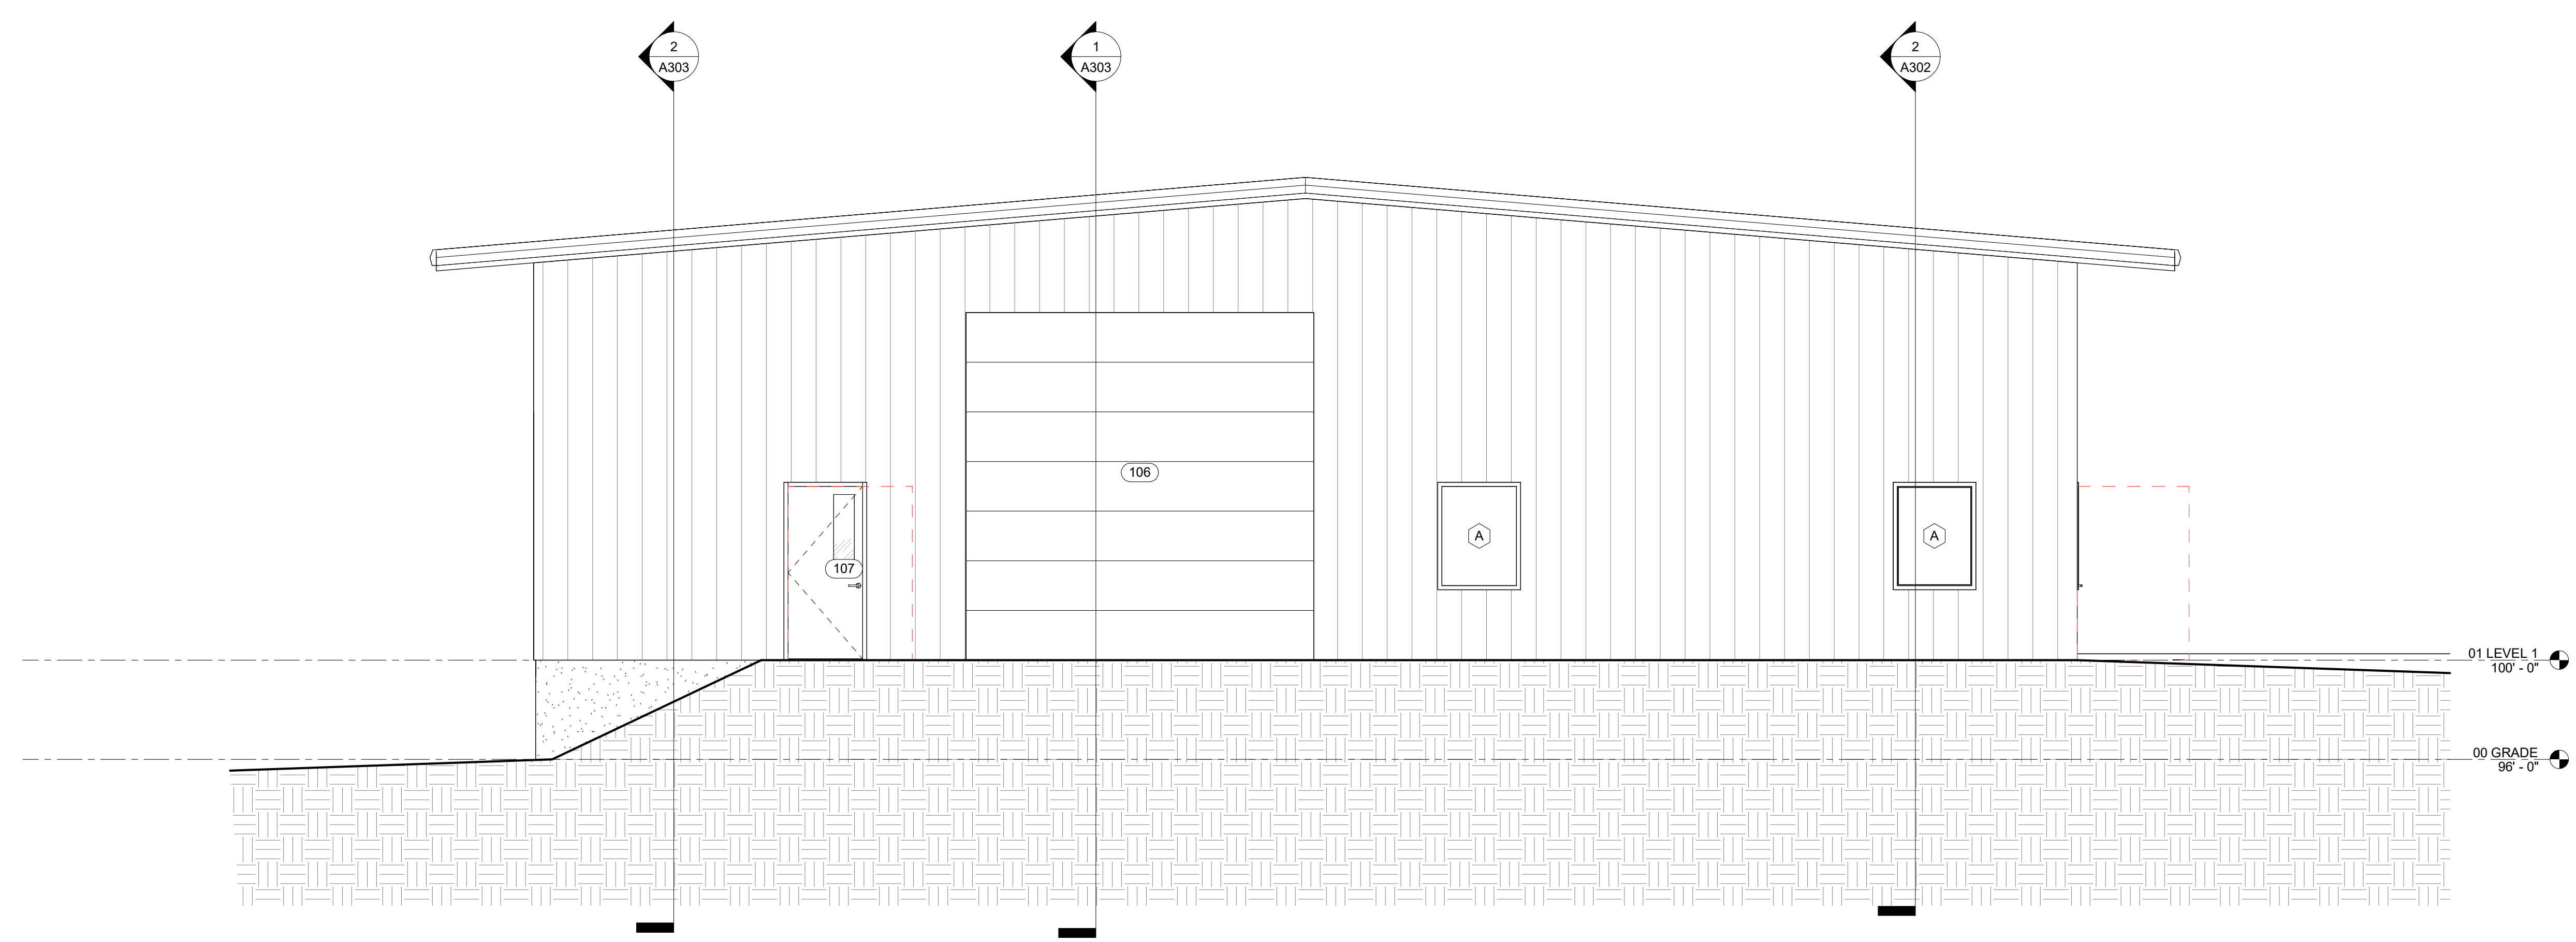

2 WEST ELEVATION  
1/4" = 1'-0"



I:\job\24 - Cross Country Freight\110 - Drawings and Supplemental Drawings\11.2 - Working Drawings\A201 - 2025-02-26.rvt


New Warehouse for:  
**Cross Country Freight**  
Lots 11 & 12, Opportunity Subdivision, Mills, Wyoming

Job No. 24-CCFS  
Date: 2/28/2025  
Drawn By: JCB


REVISIONS

EXTERIOR ELEVATIONS


**A202**

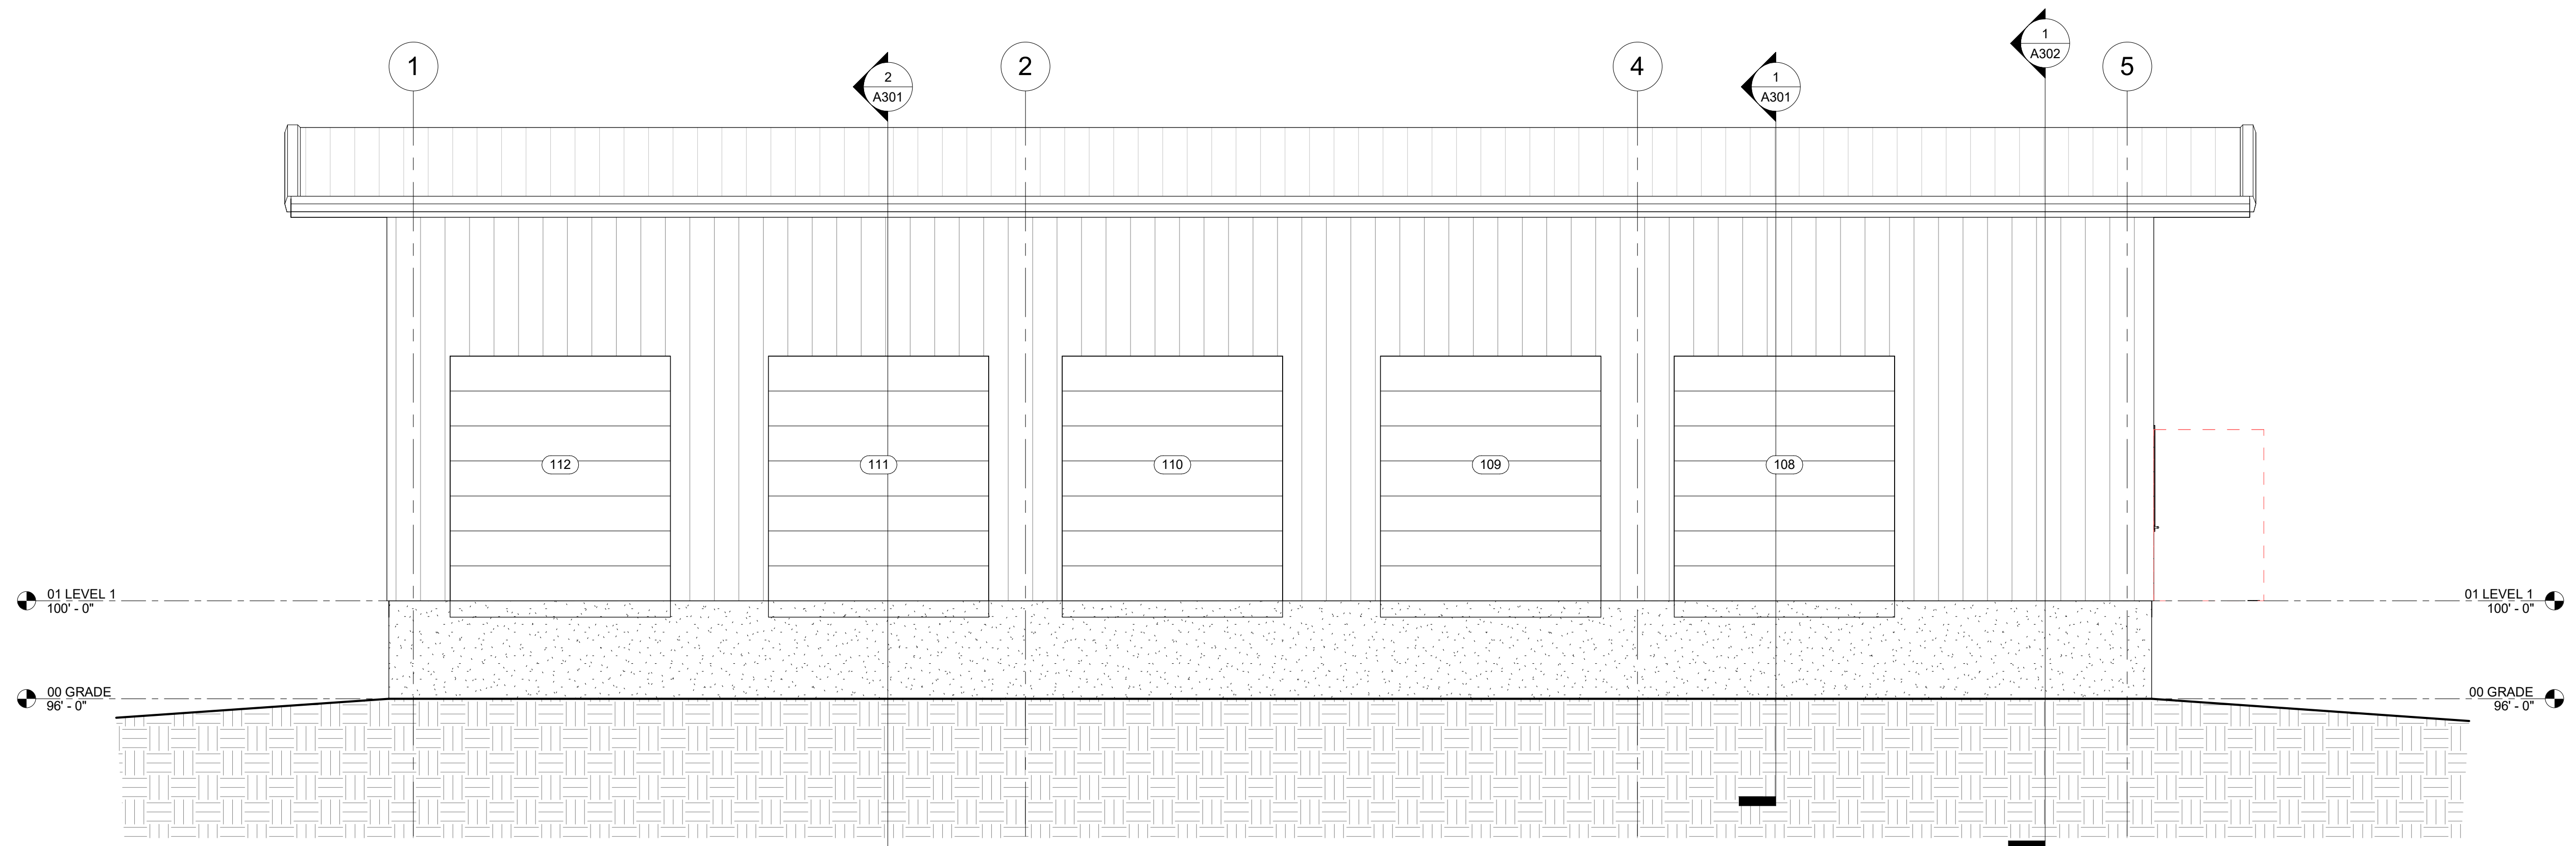

① NORTH ELEVATION  
1/4" = 1'-0"

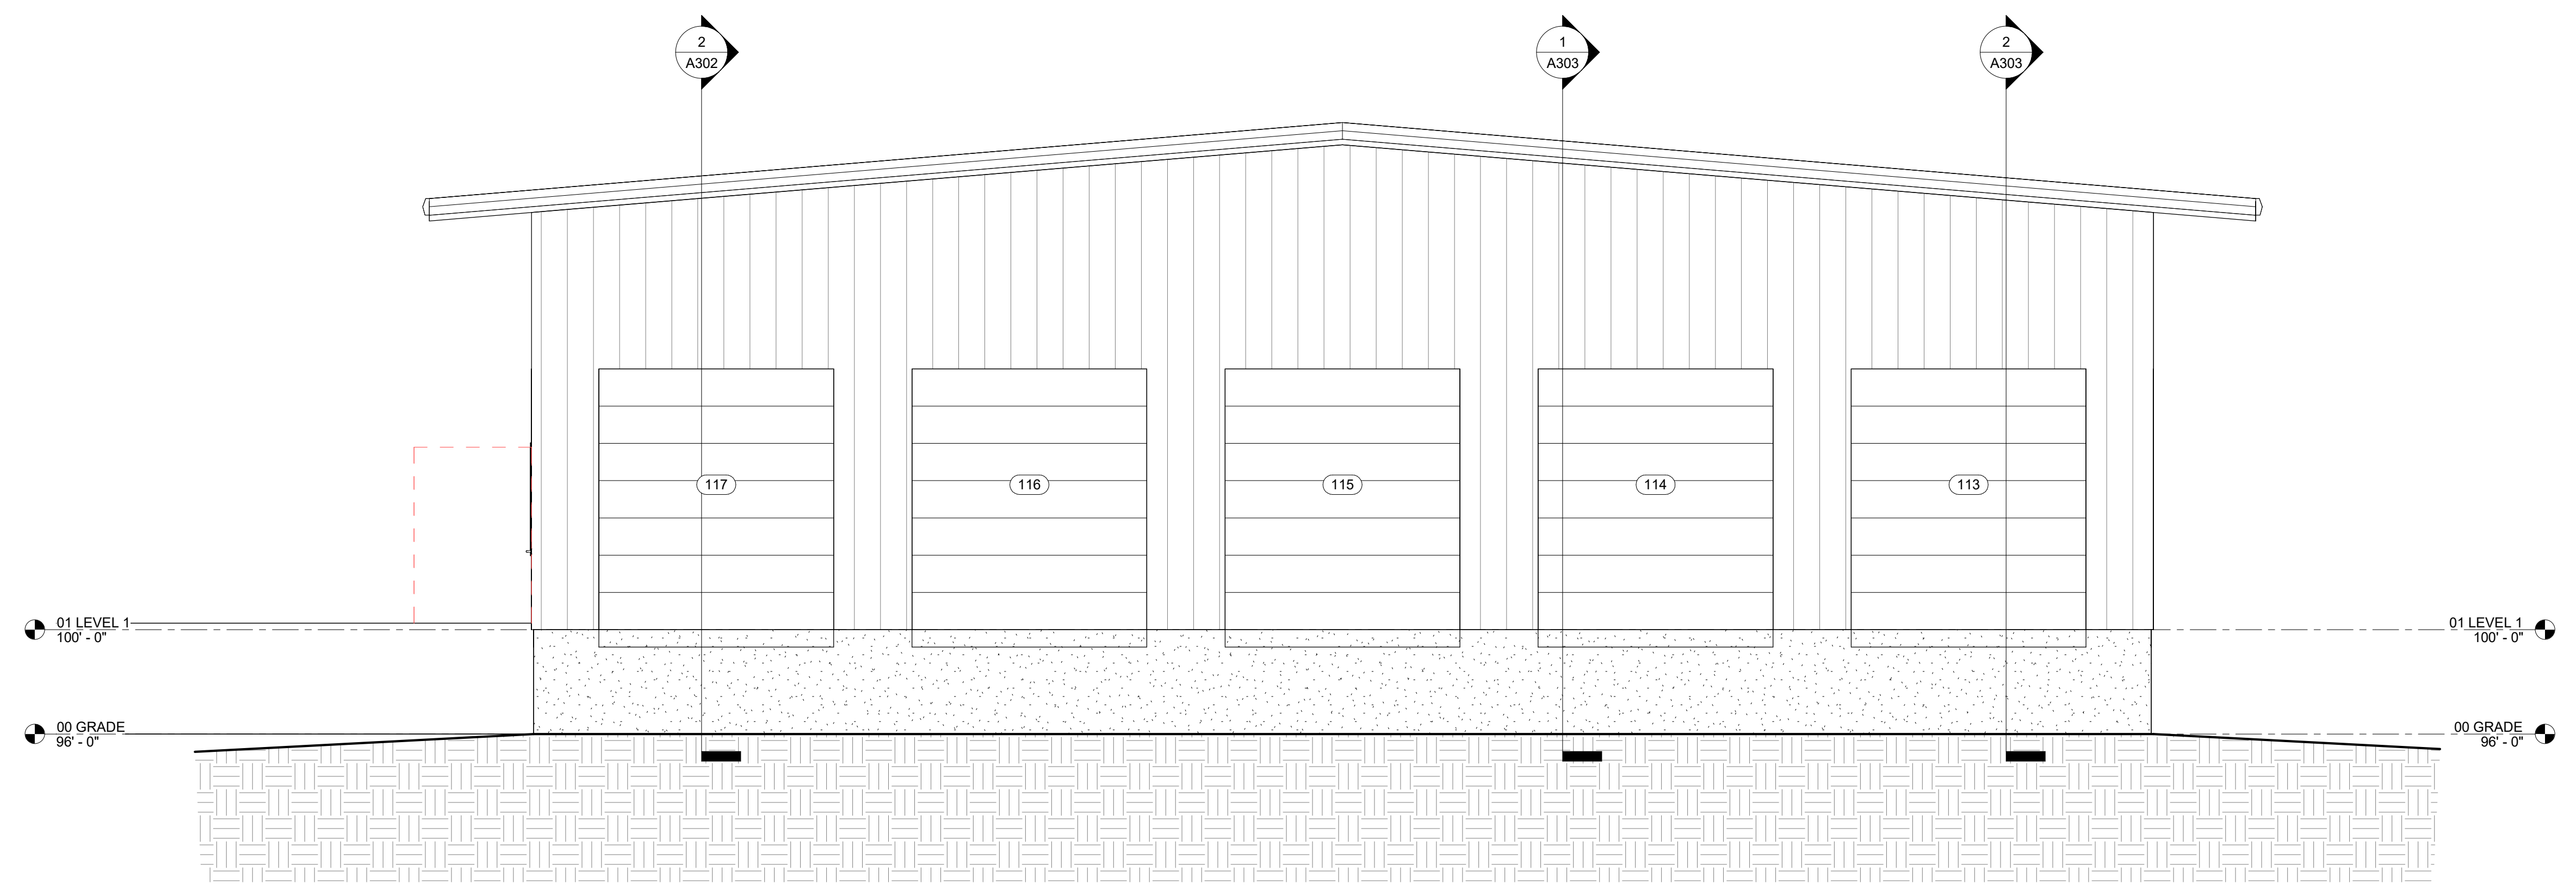

② EAST ELEVATION  
1/4" = 1'-0"







New Warehouse for:  
**Cross Country Freight**  
Lots 11 & 12, Opportunity Subdivision, Mills, Wyoming

Job No. 24-CCFS  
Date: 2/28/2025  
Drawn By: JCB

REVISIONS

BUILDING SECTIONS

**A301**

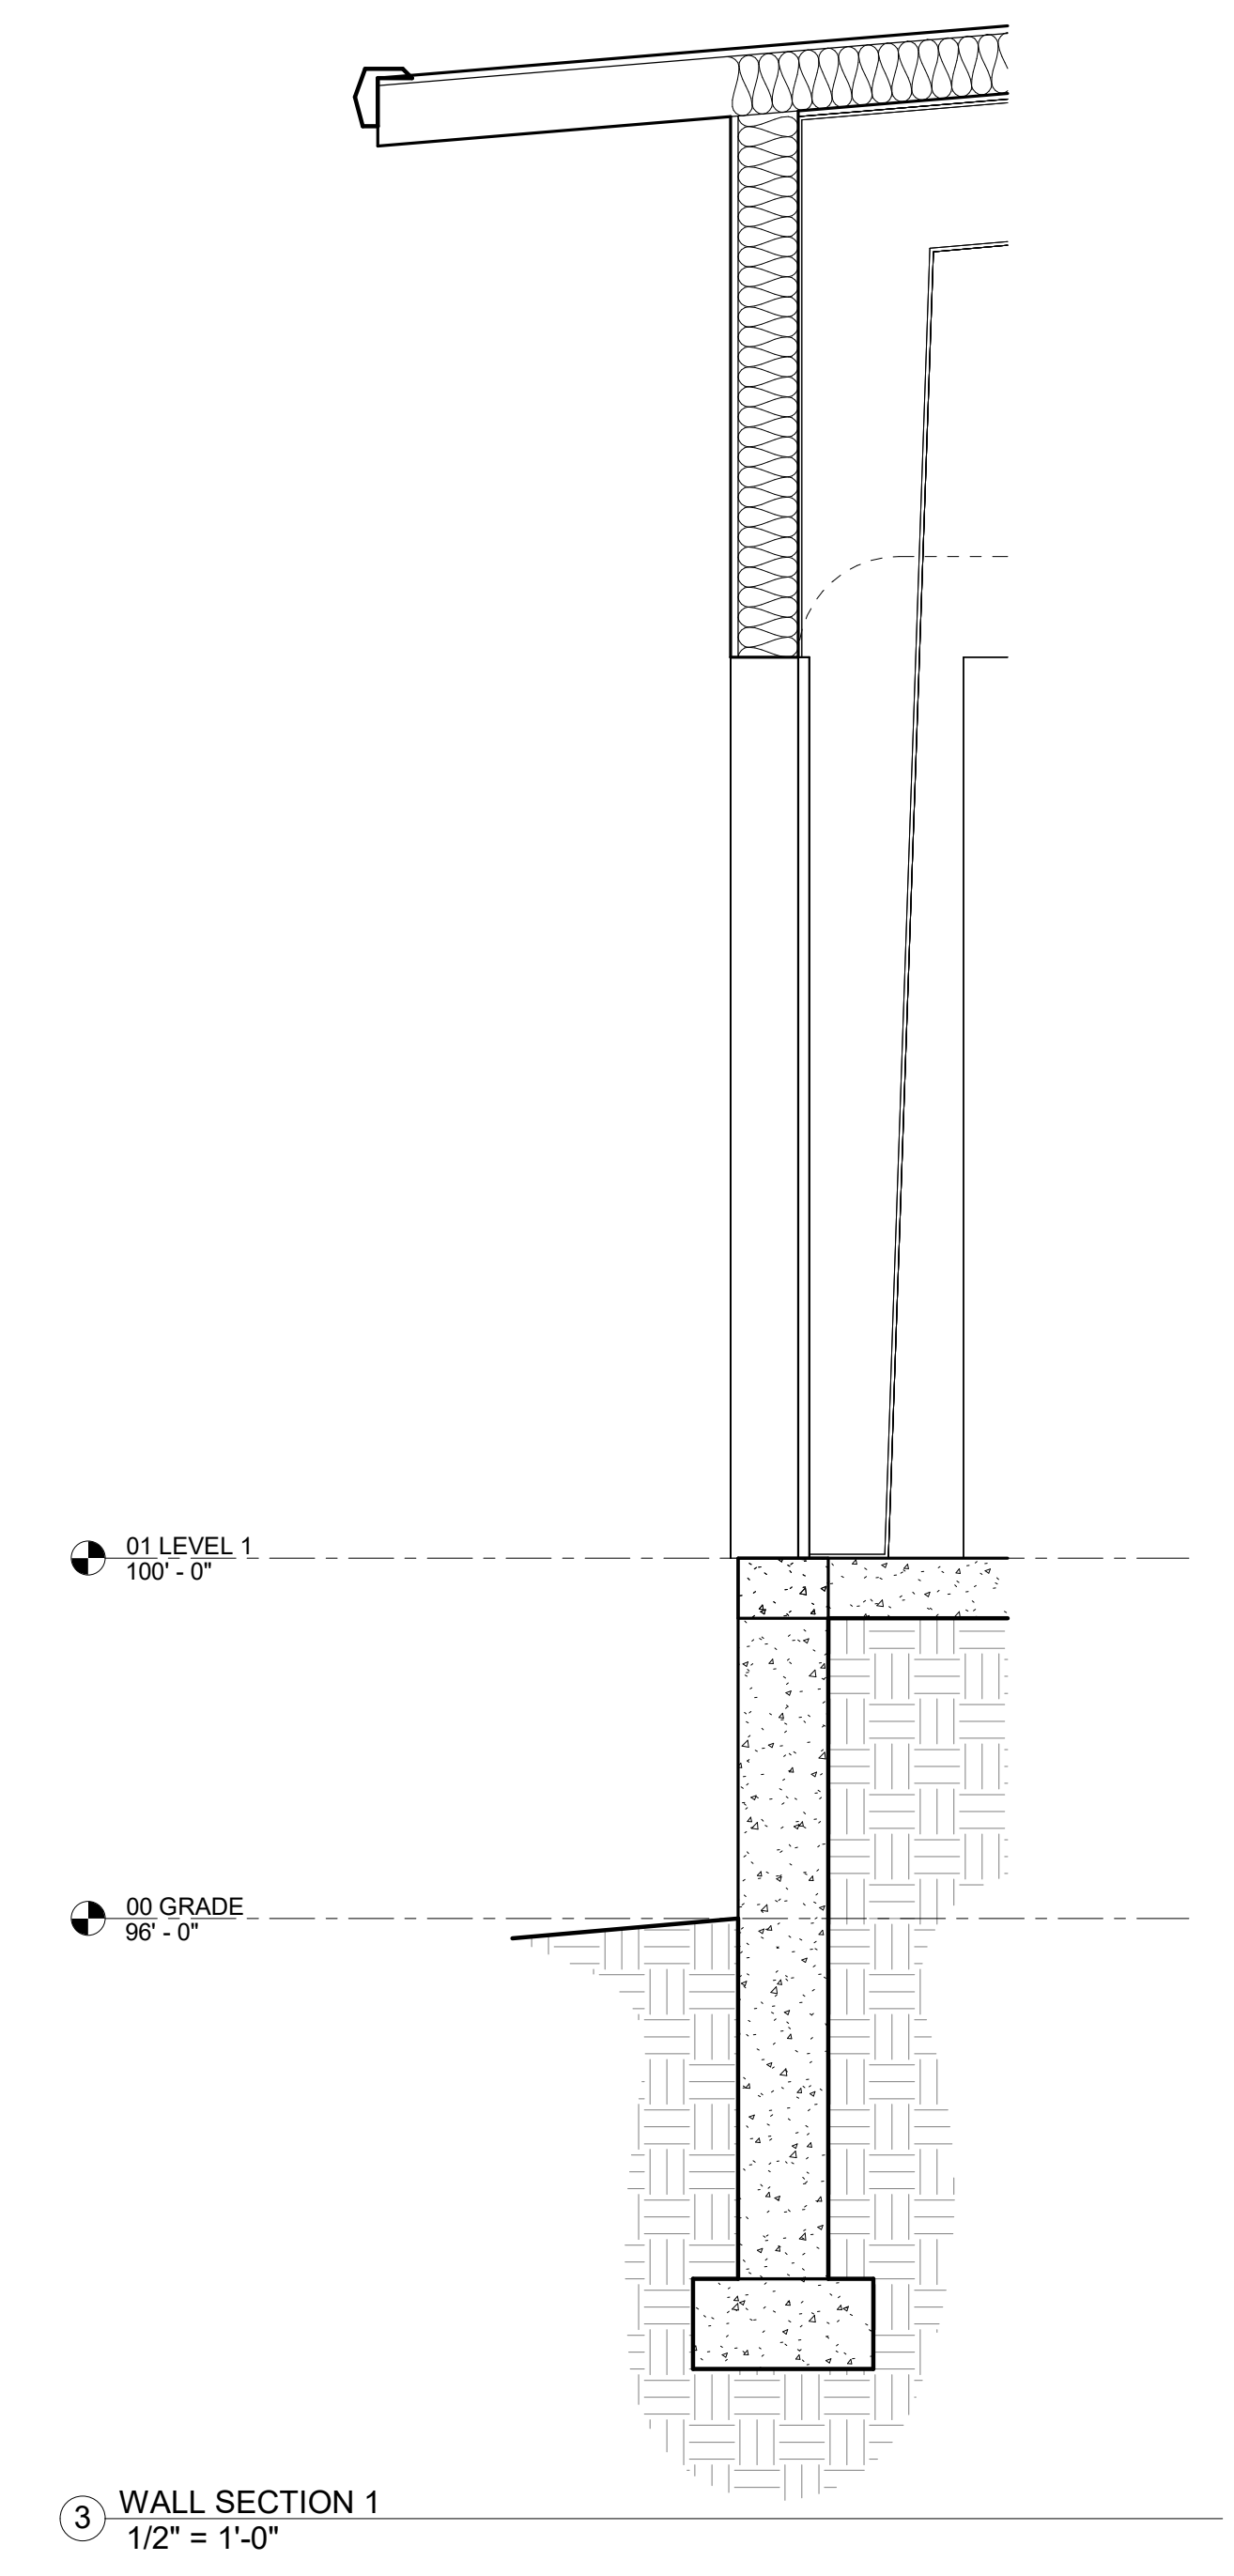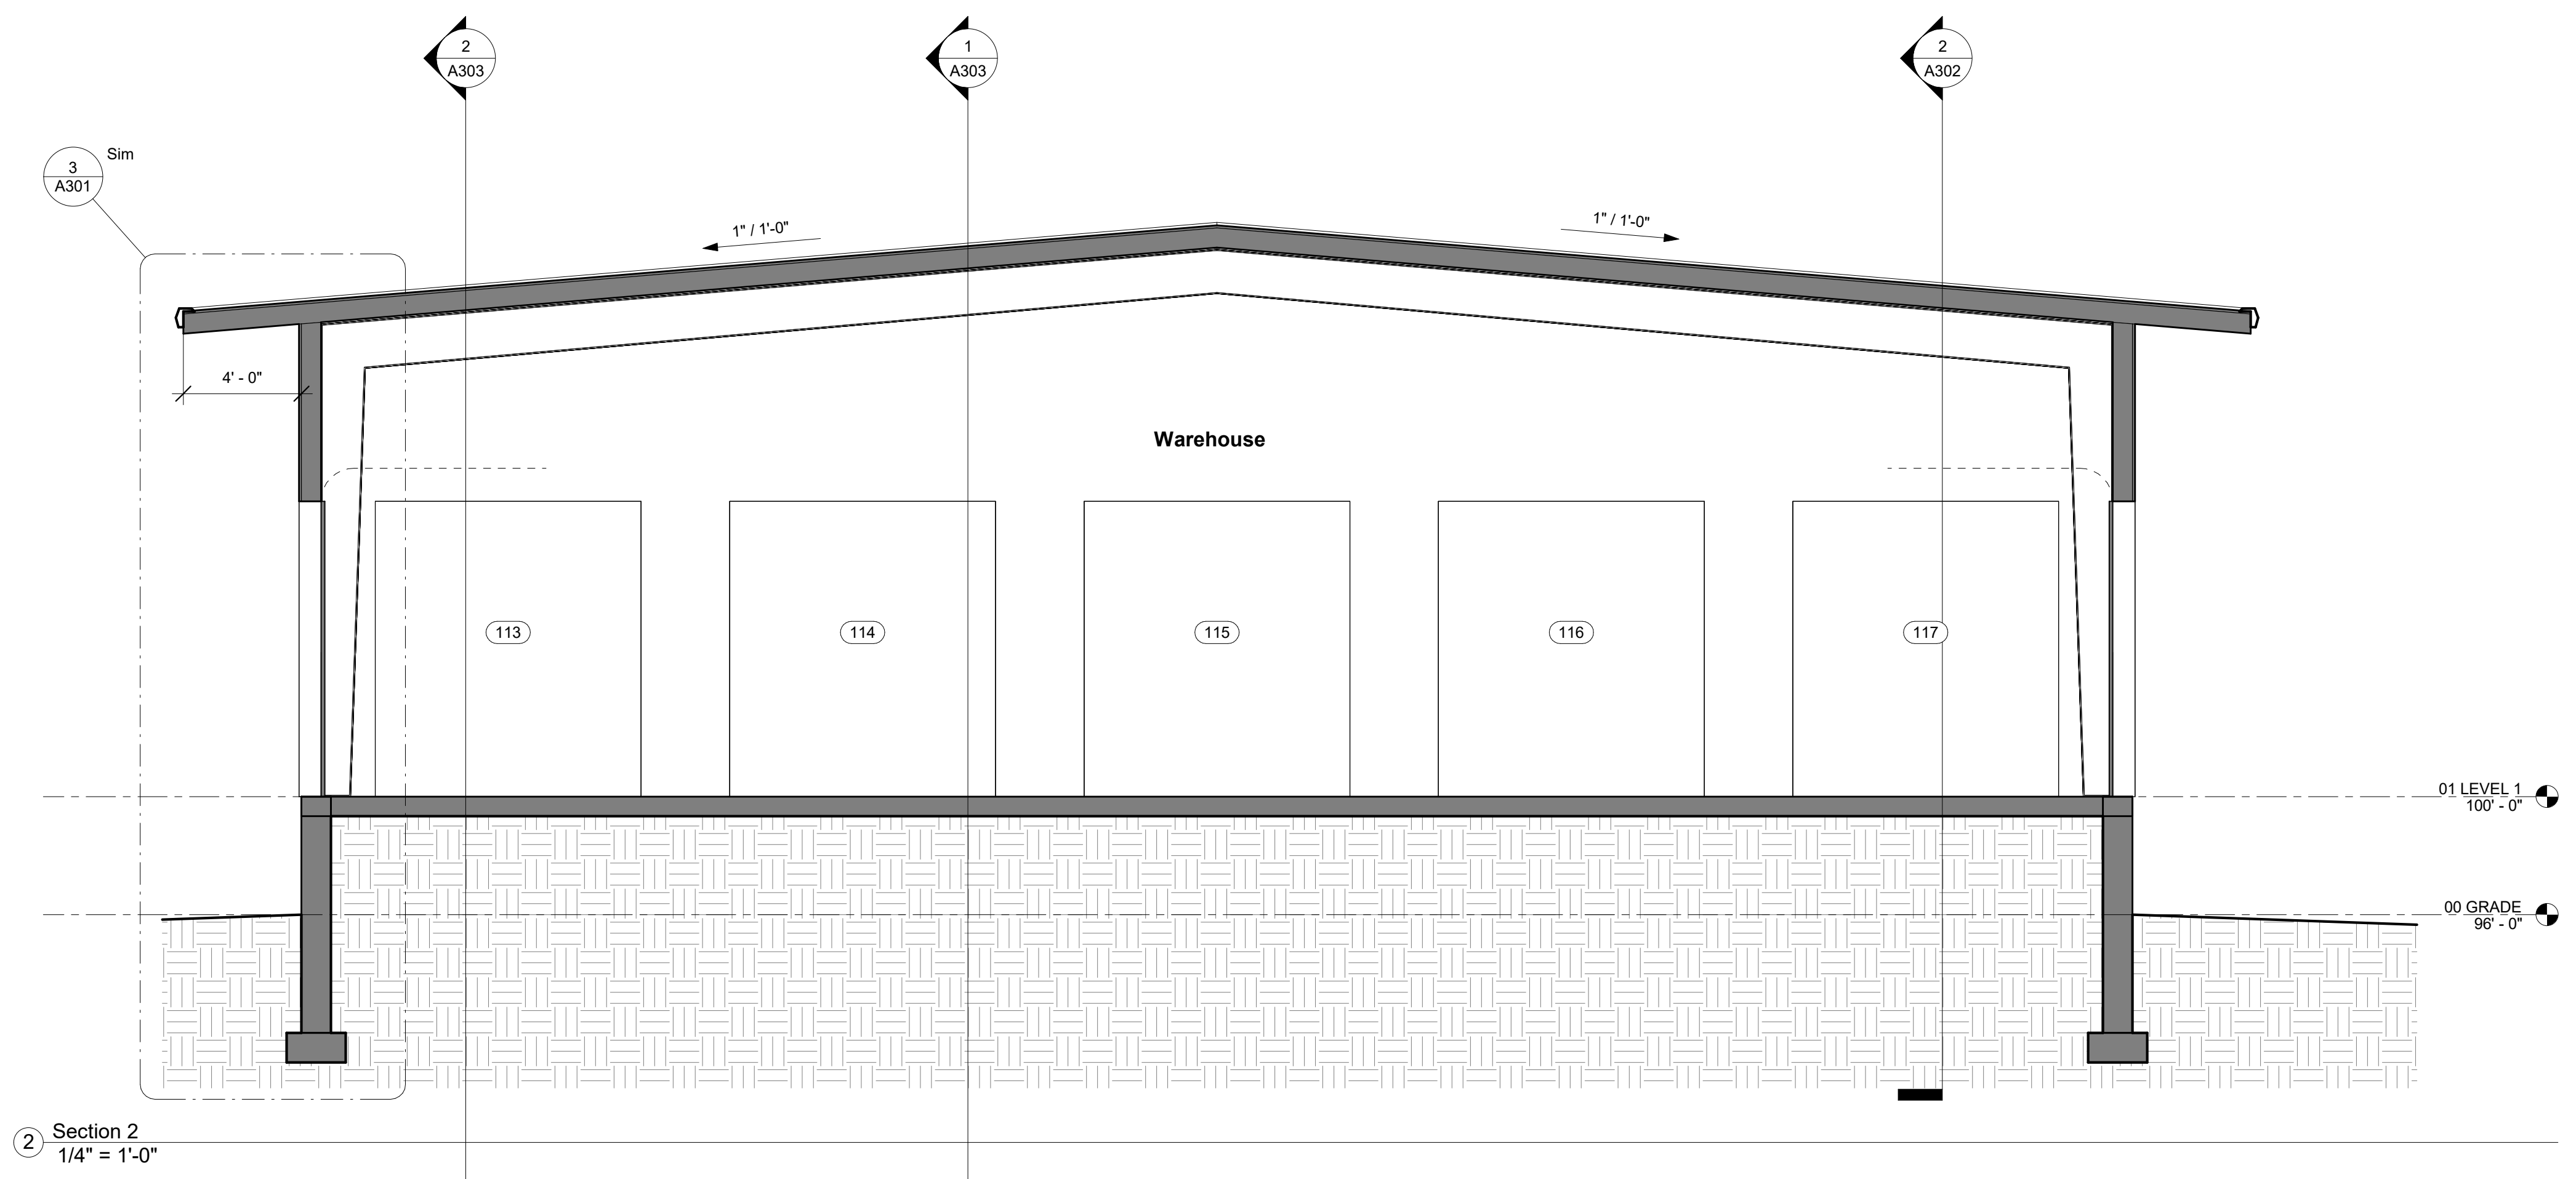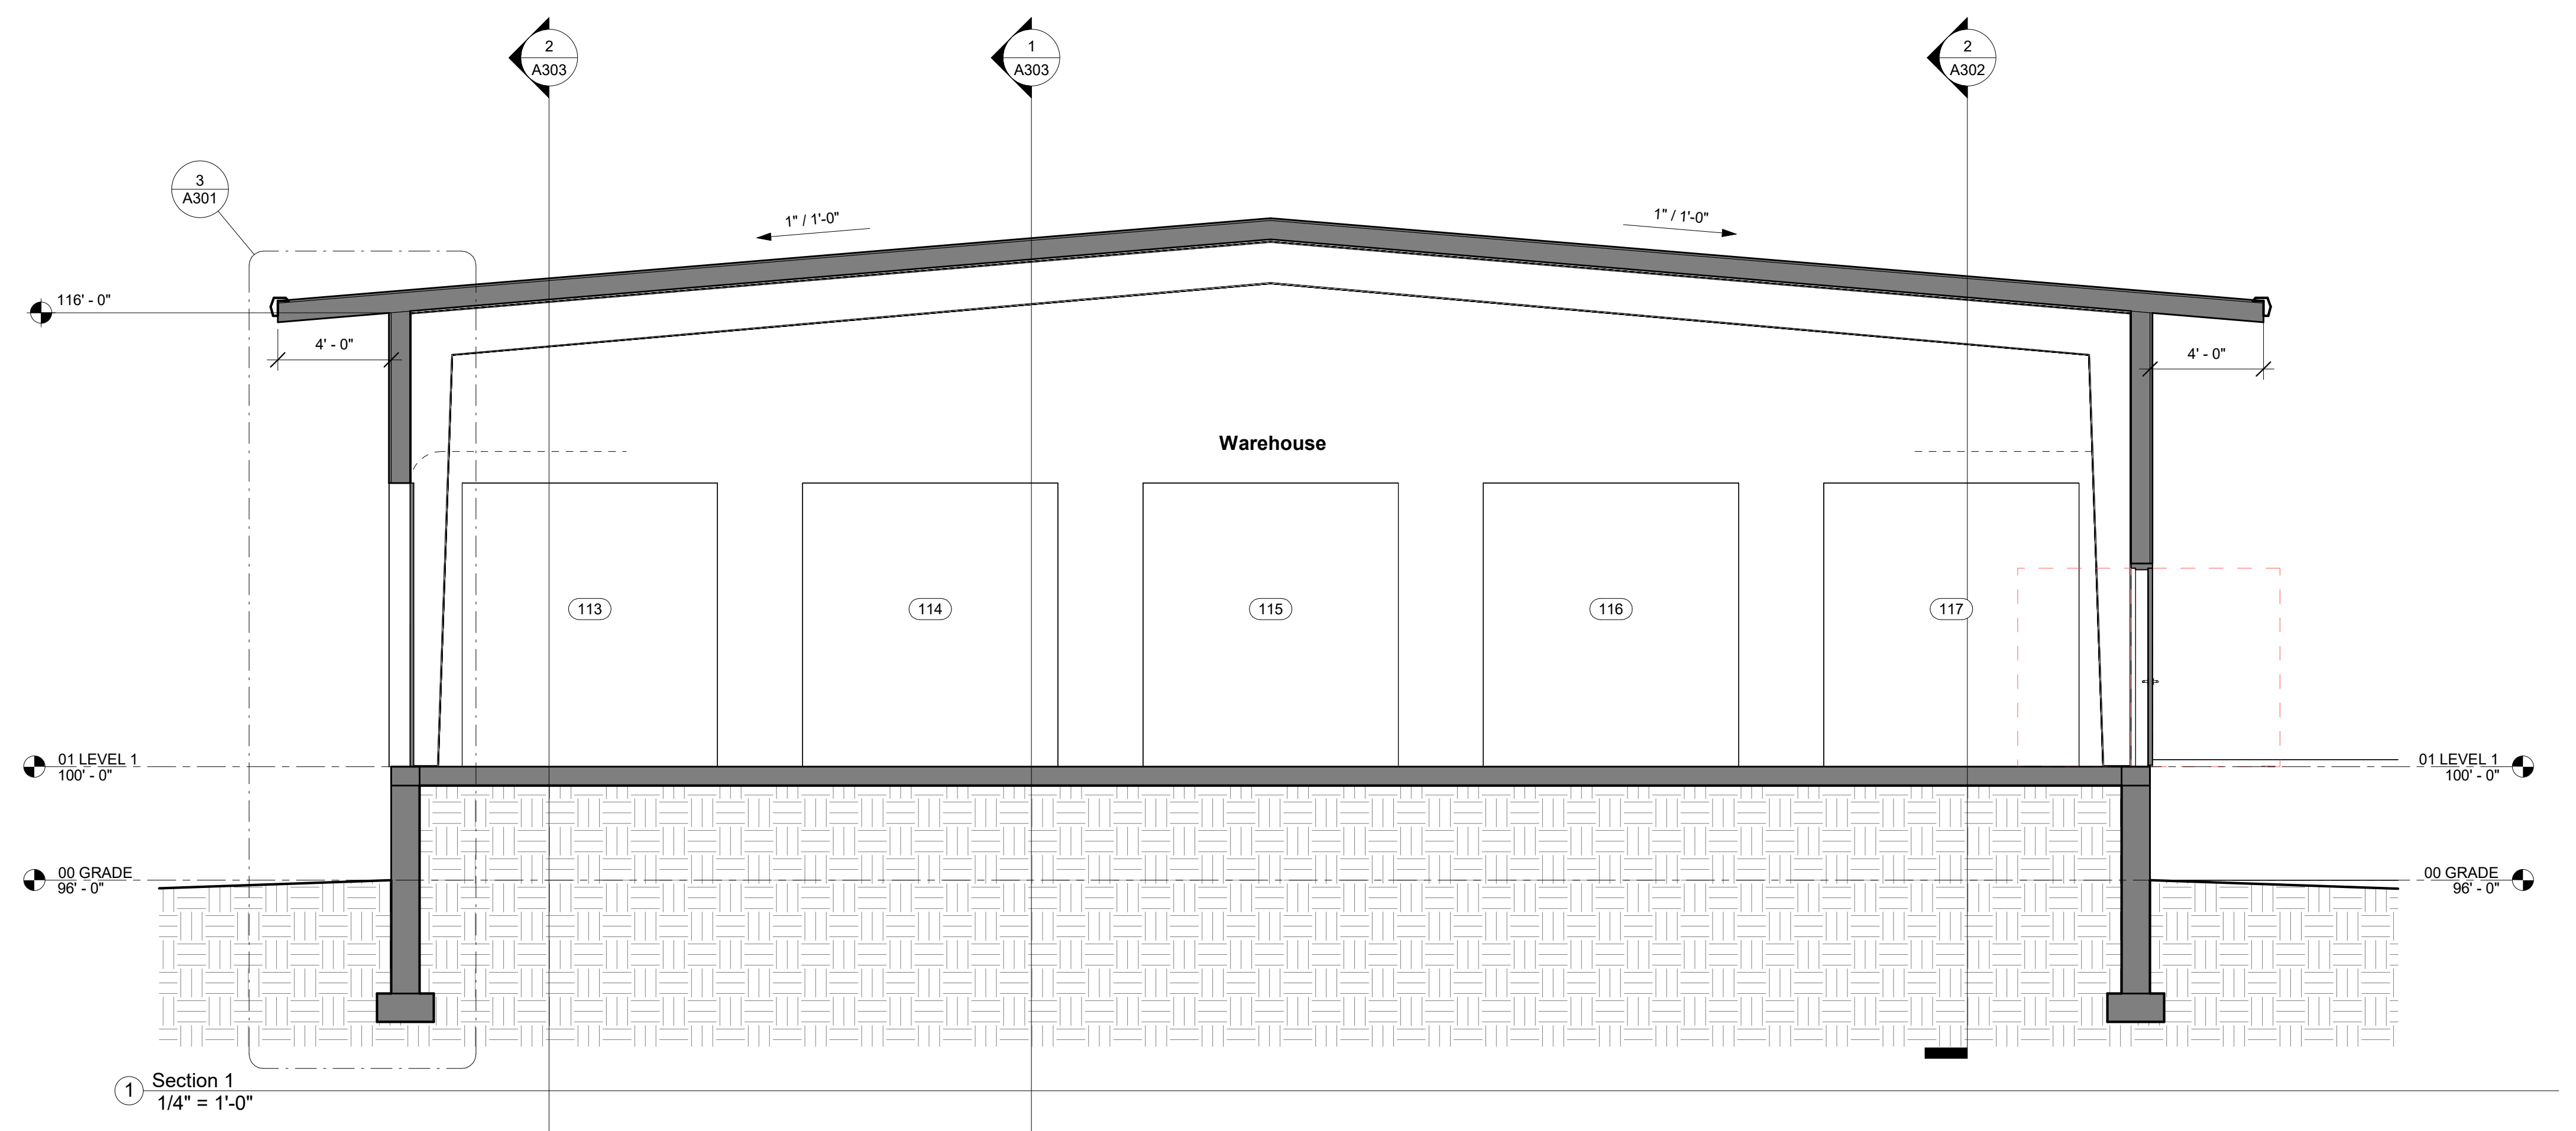


New Warehouse for:  
**Cross Country Freight**  
Lots 11 & 12, Opportunity Subdivision, Mills, Wyoming

Job No. 24-CCFS  
Date: 2/28/2025  
Drawn By: JCB


REVISIONS

BUILDING SECTIONS


**A302**

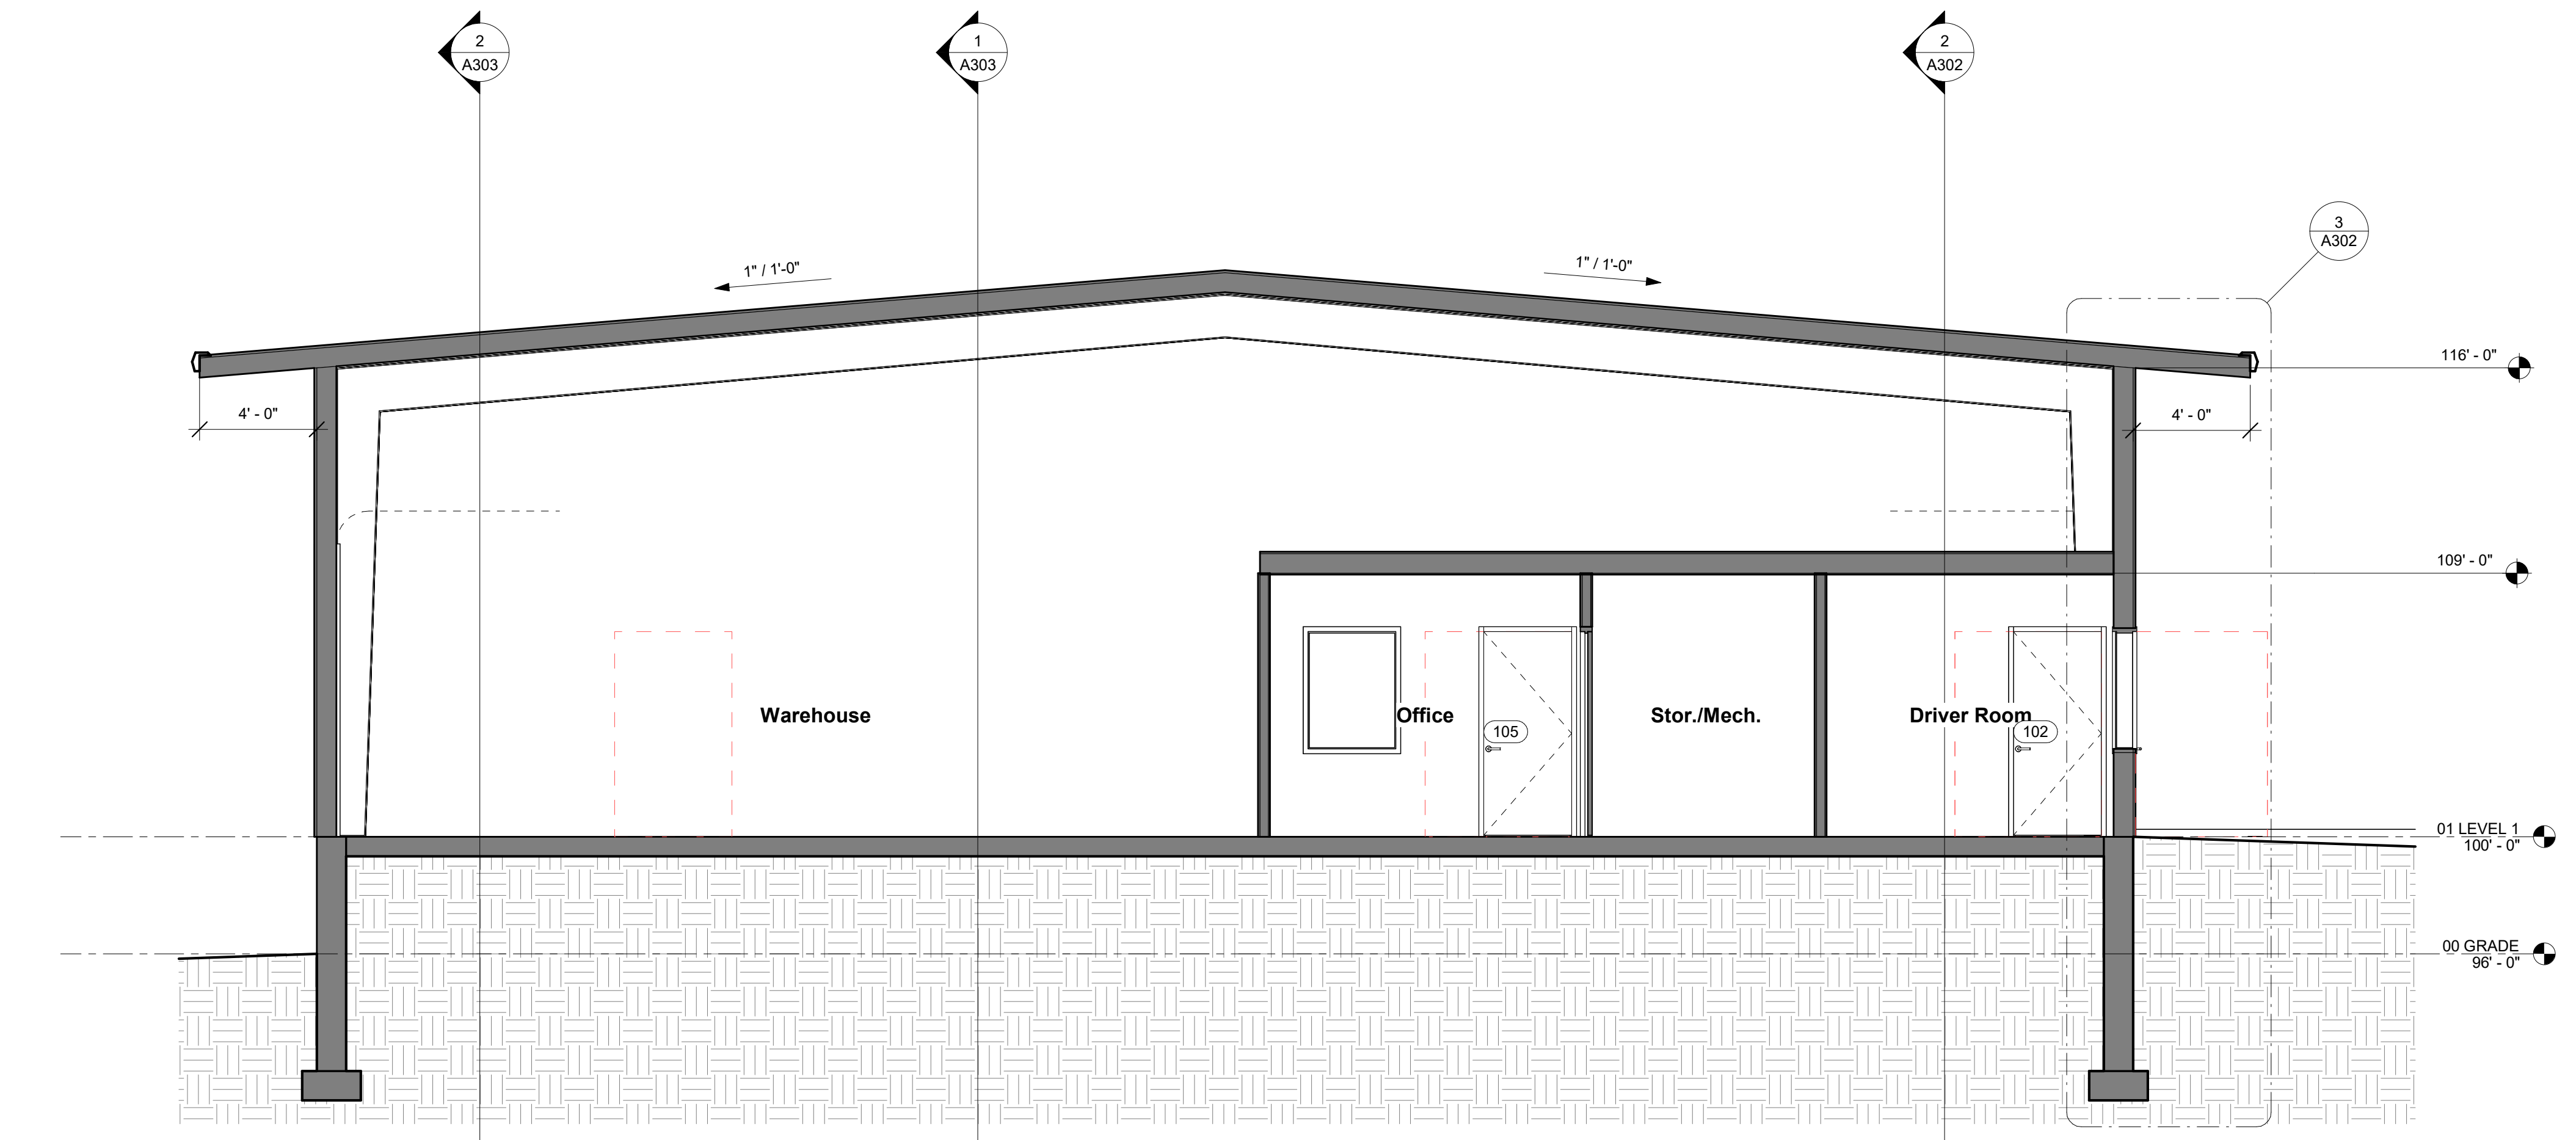


1 Section 3  
1/4" = 1'-0"

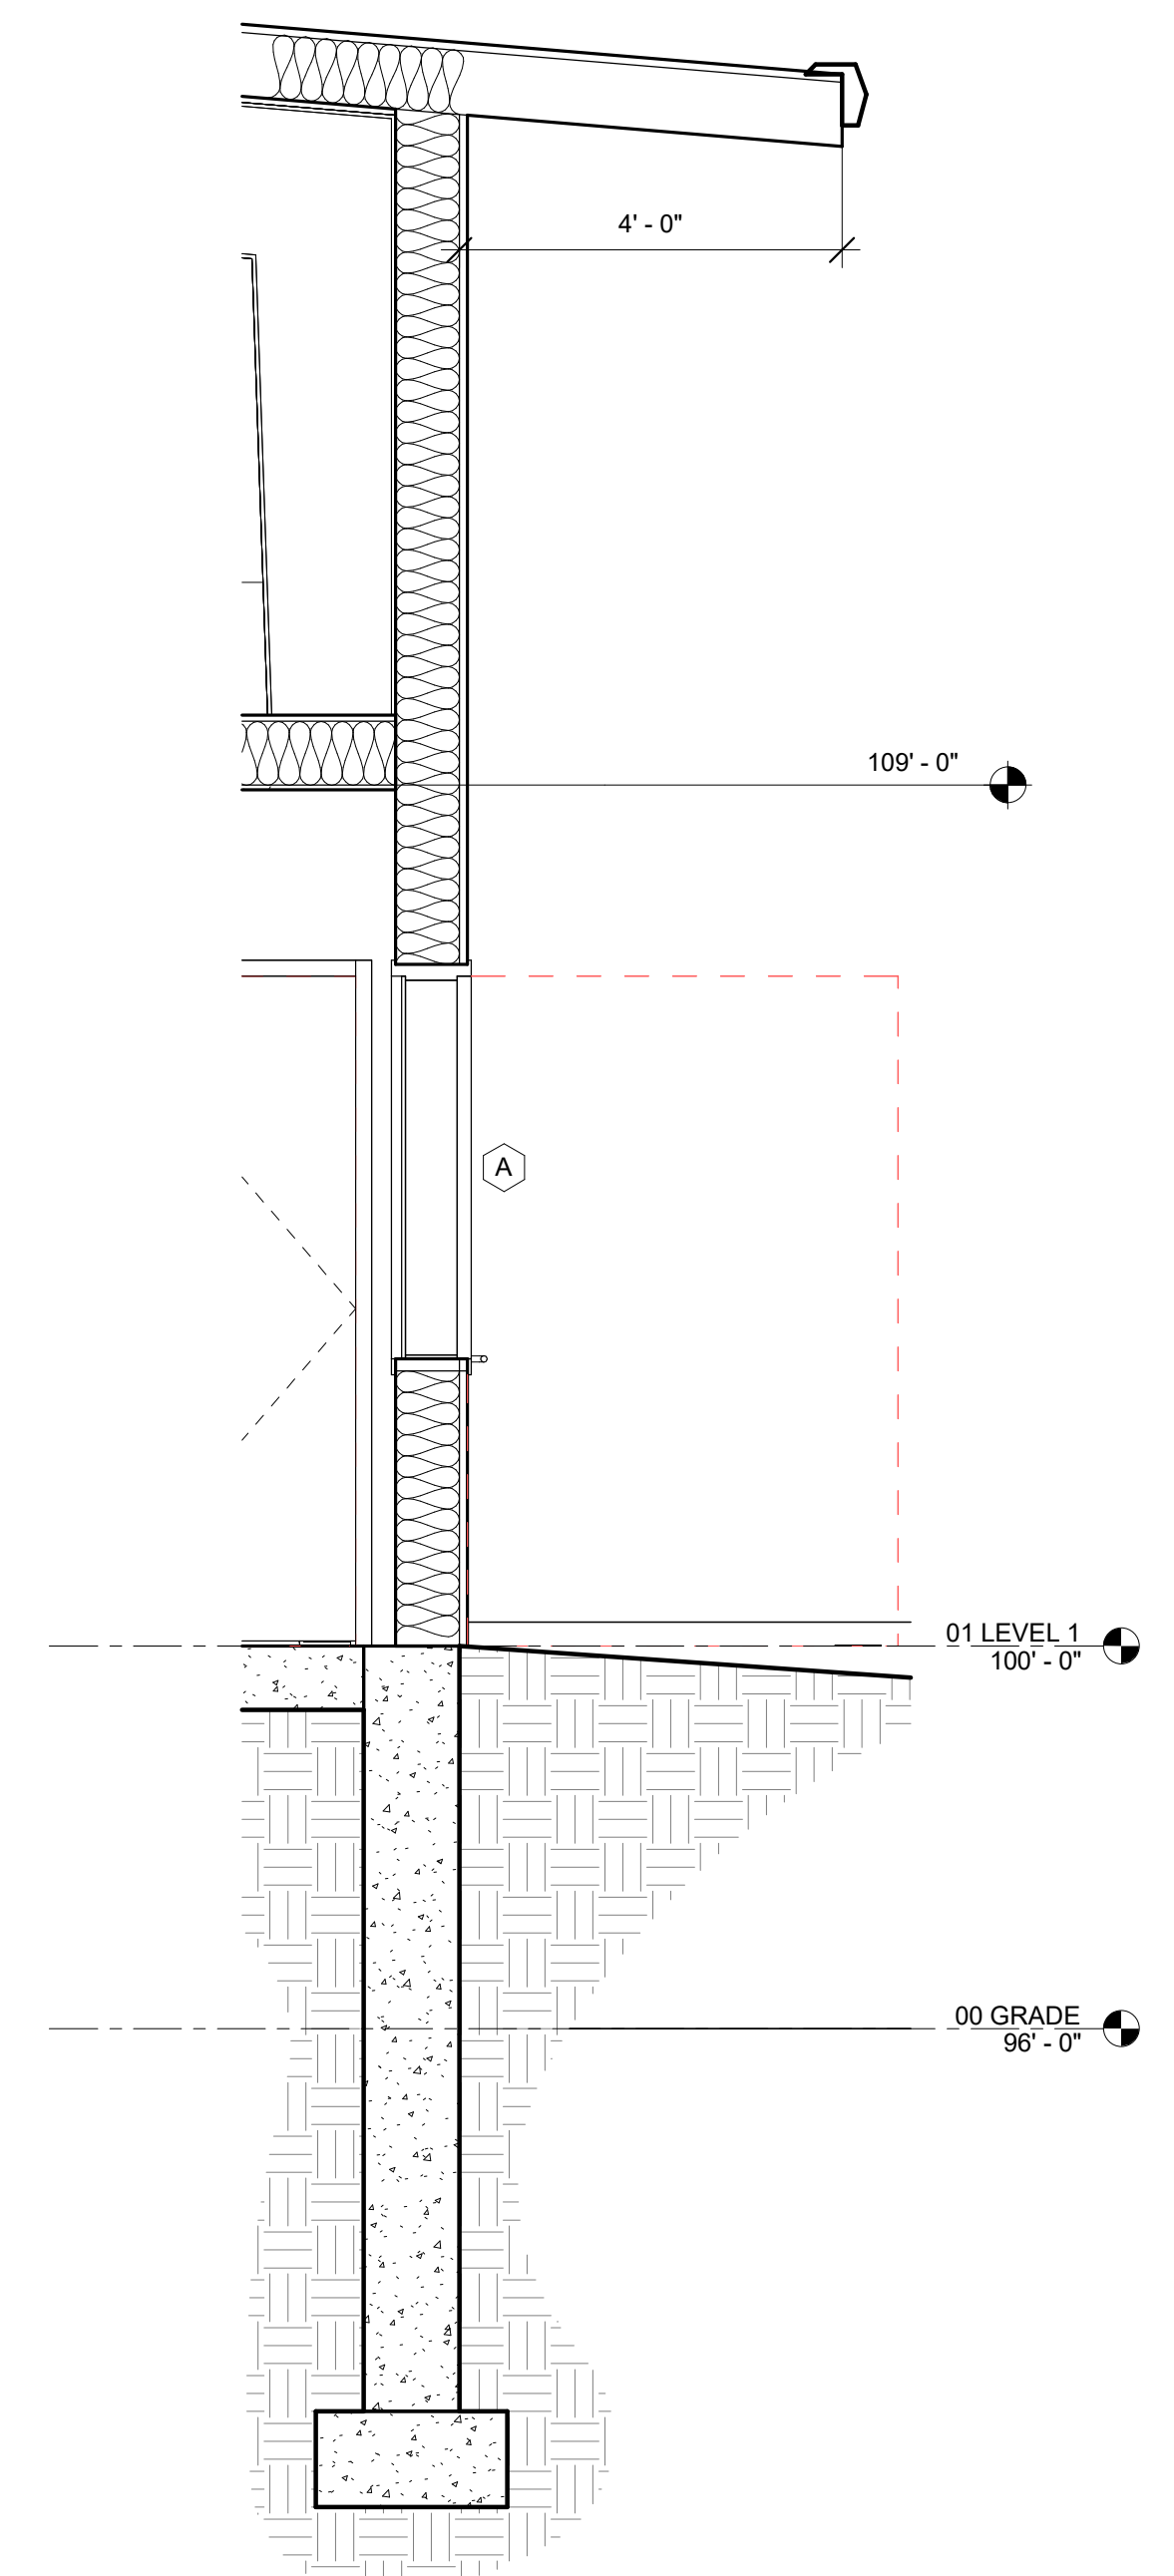

3 WALL SECTION 2  
1/2" = 1'-0"

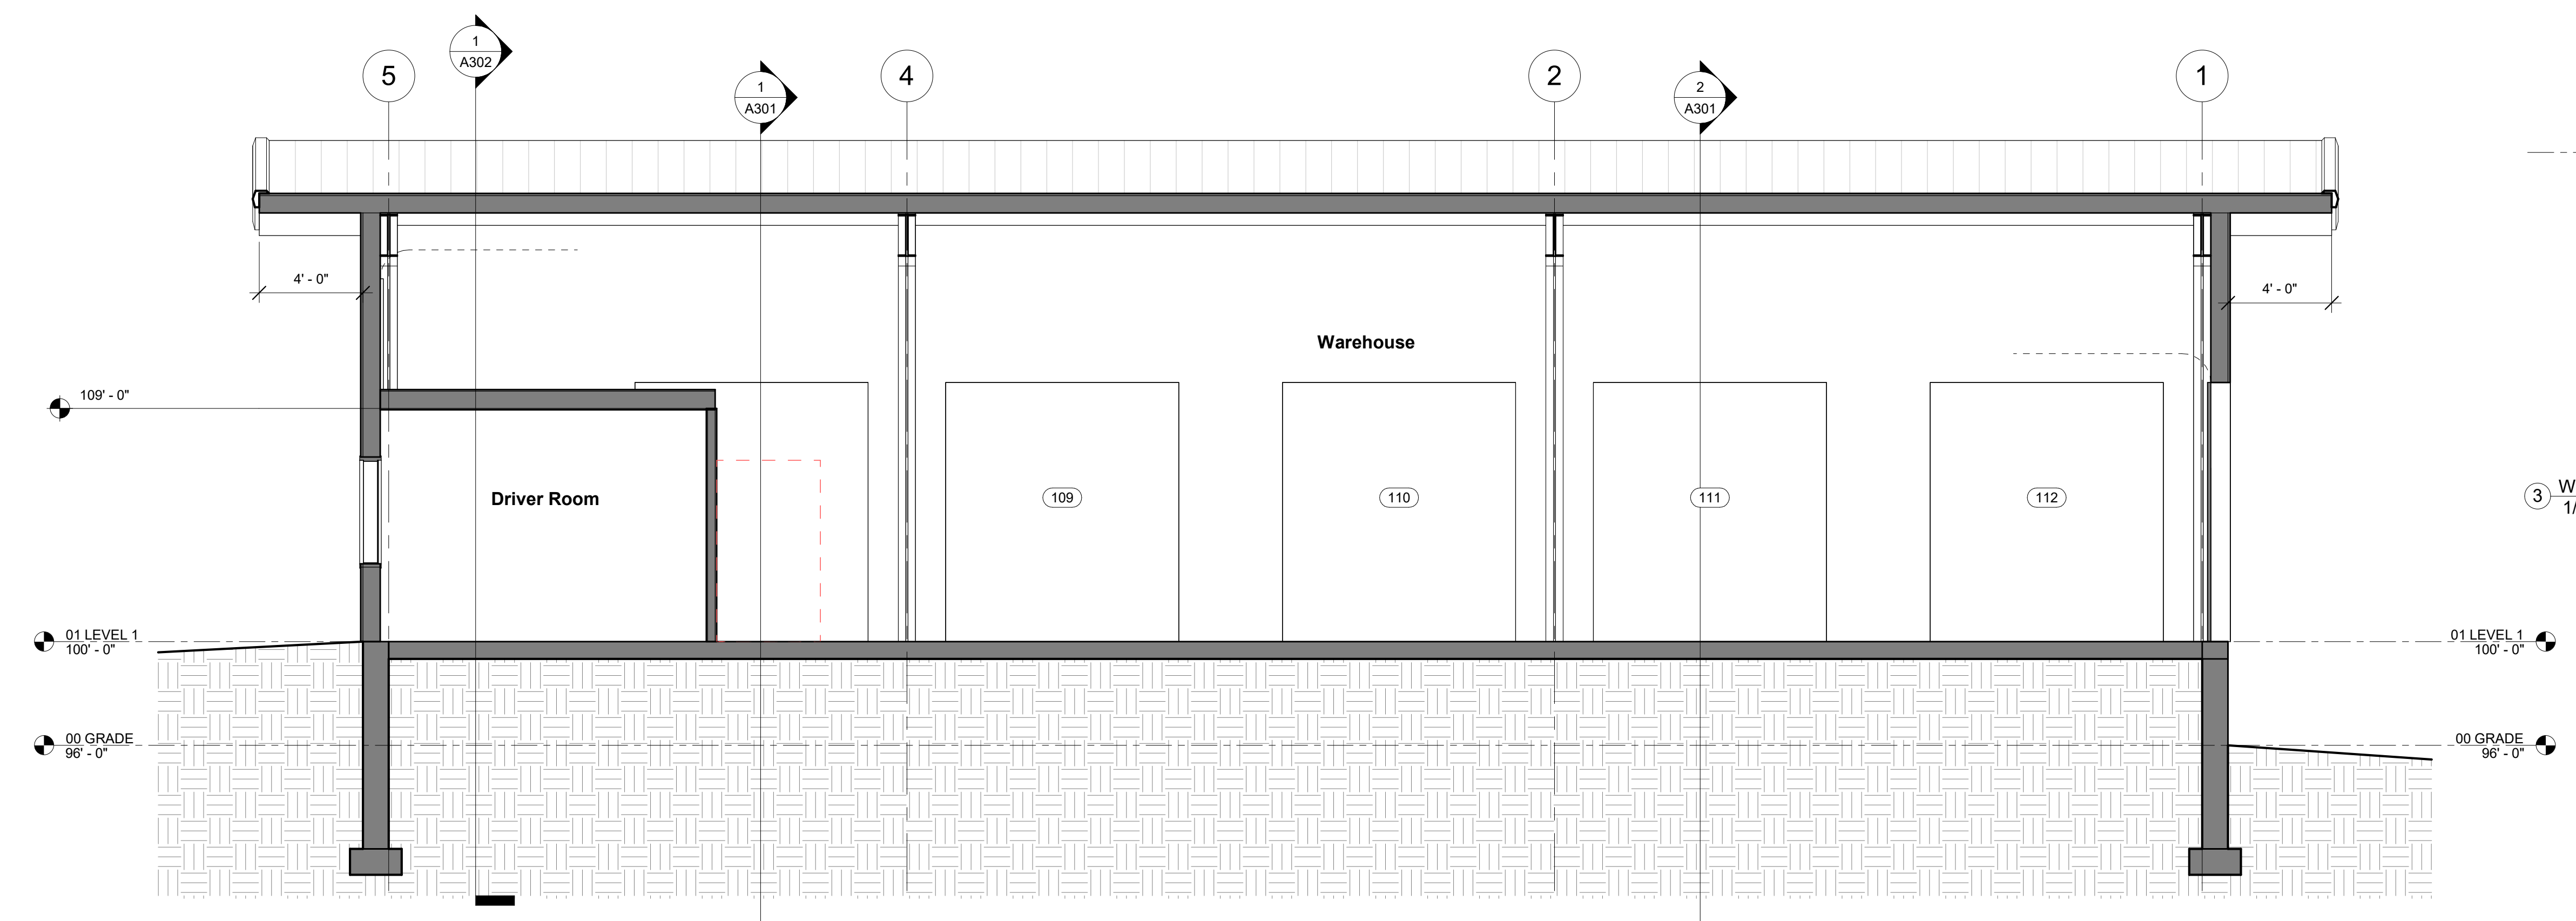

2 Section 4  
1/4" = 1'-0"




New Warehouse for:  
**Cross Country Freight**  
Lots 11 & 12, Opportunity Subdivision, Mills, Wyoming

Job No. 24-CFS  
Date: 2/28/2025  
Drawn By: JCB


REVISIONS

BUILDING SECTIONS


**A303**

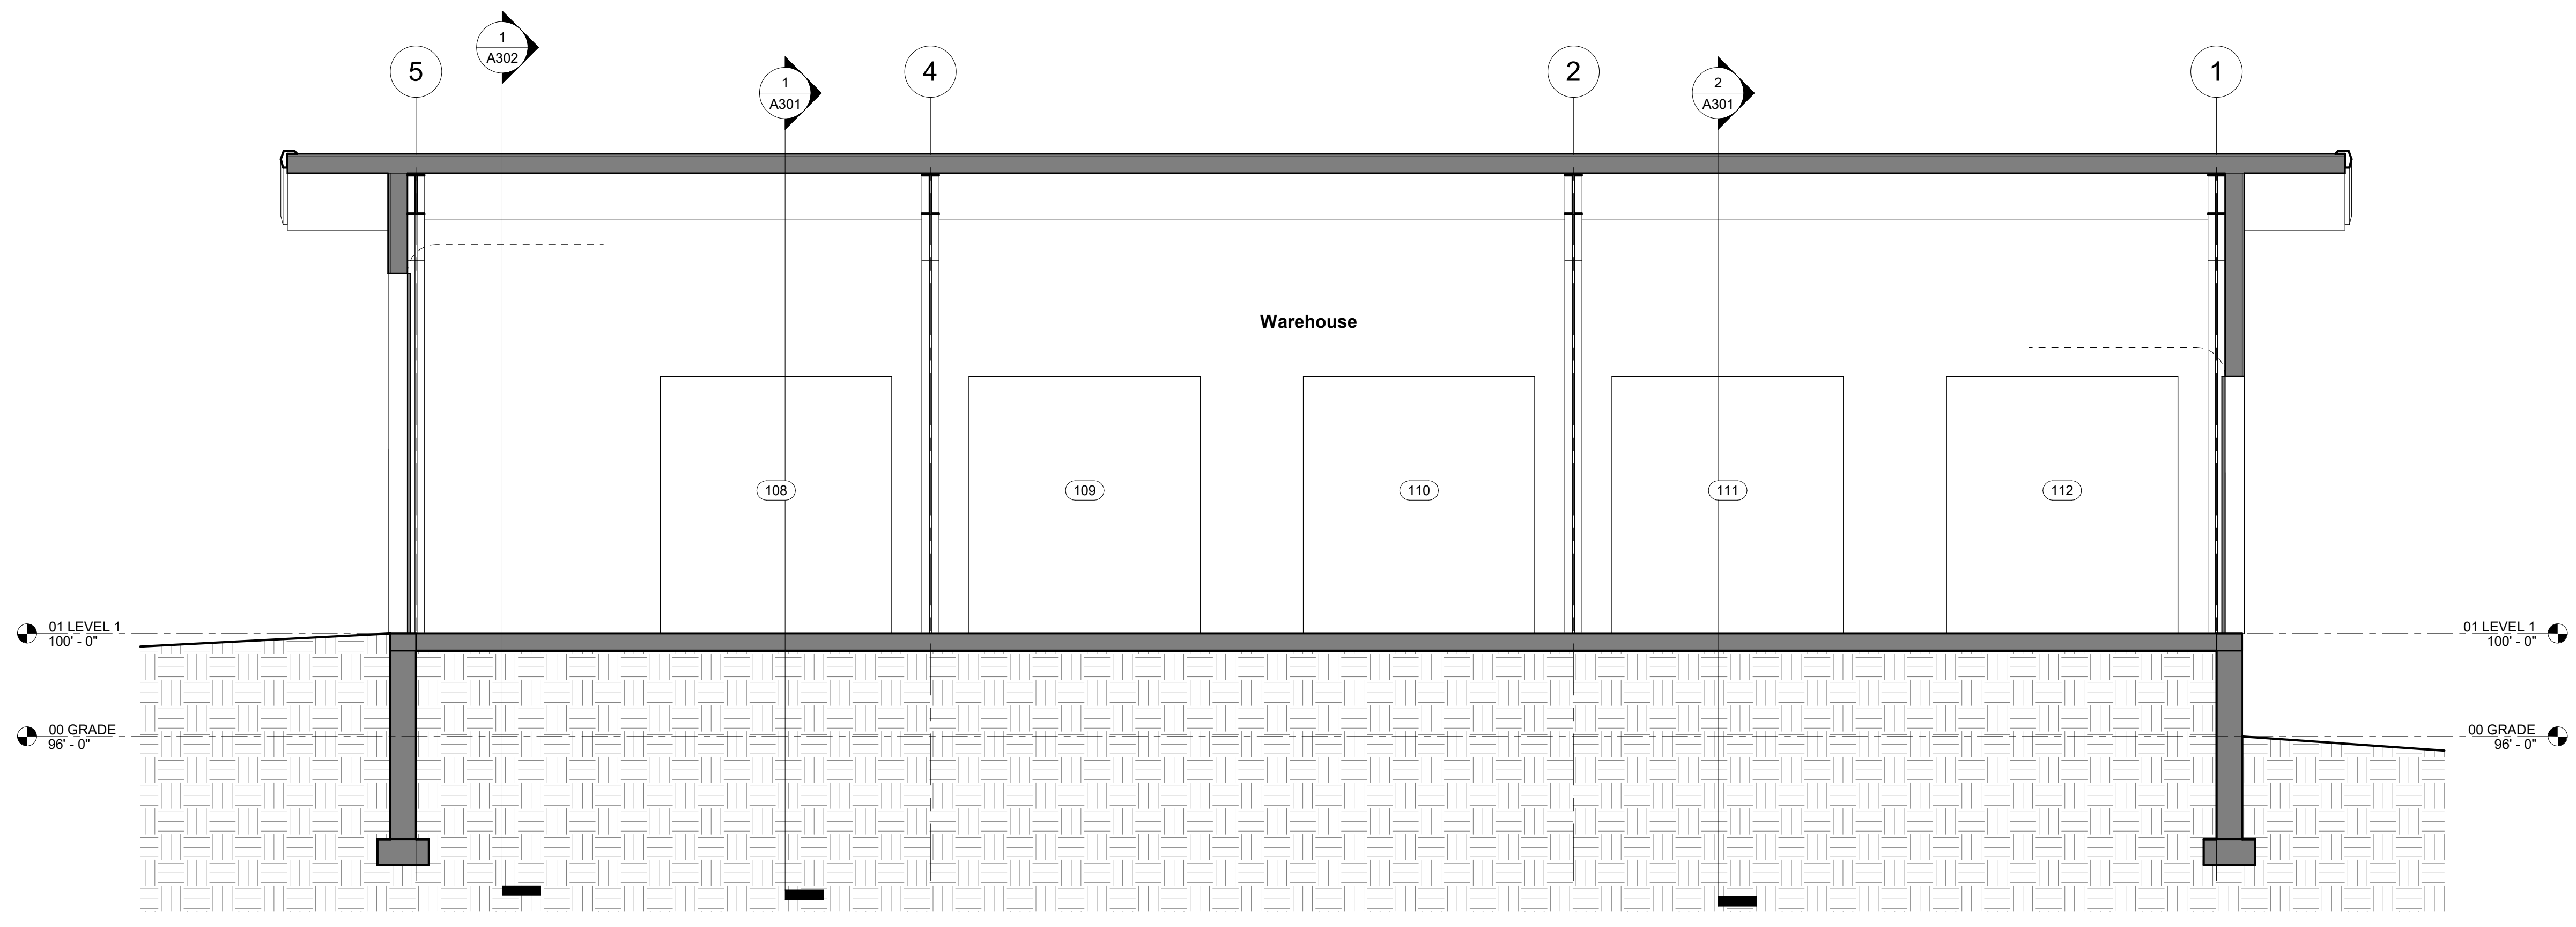


1 Section 5  
1/4" = 1'-0"

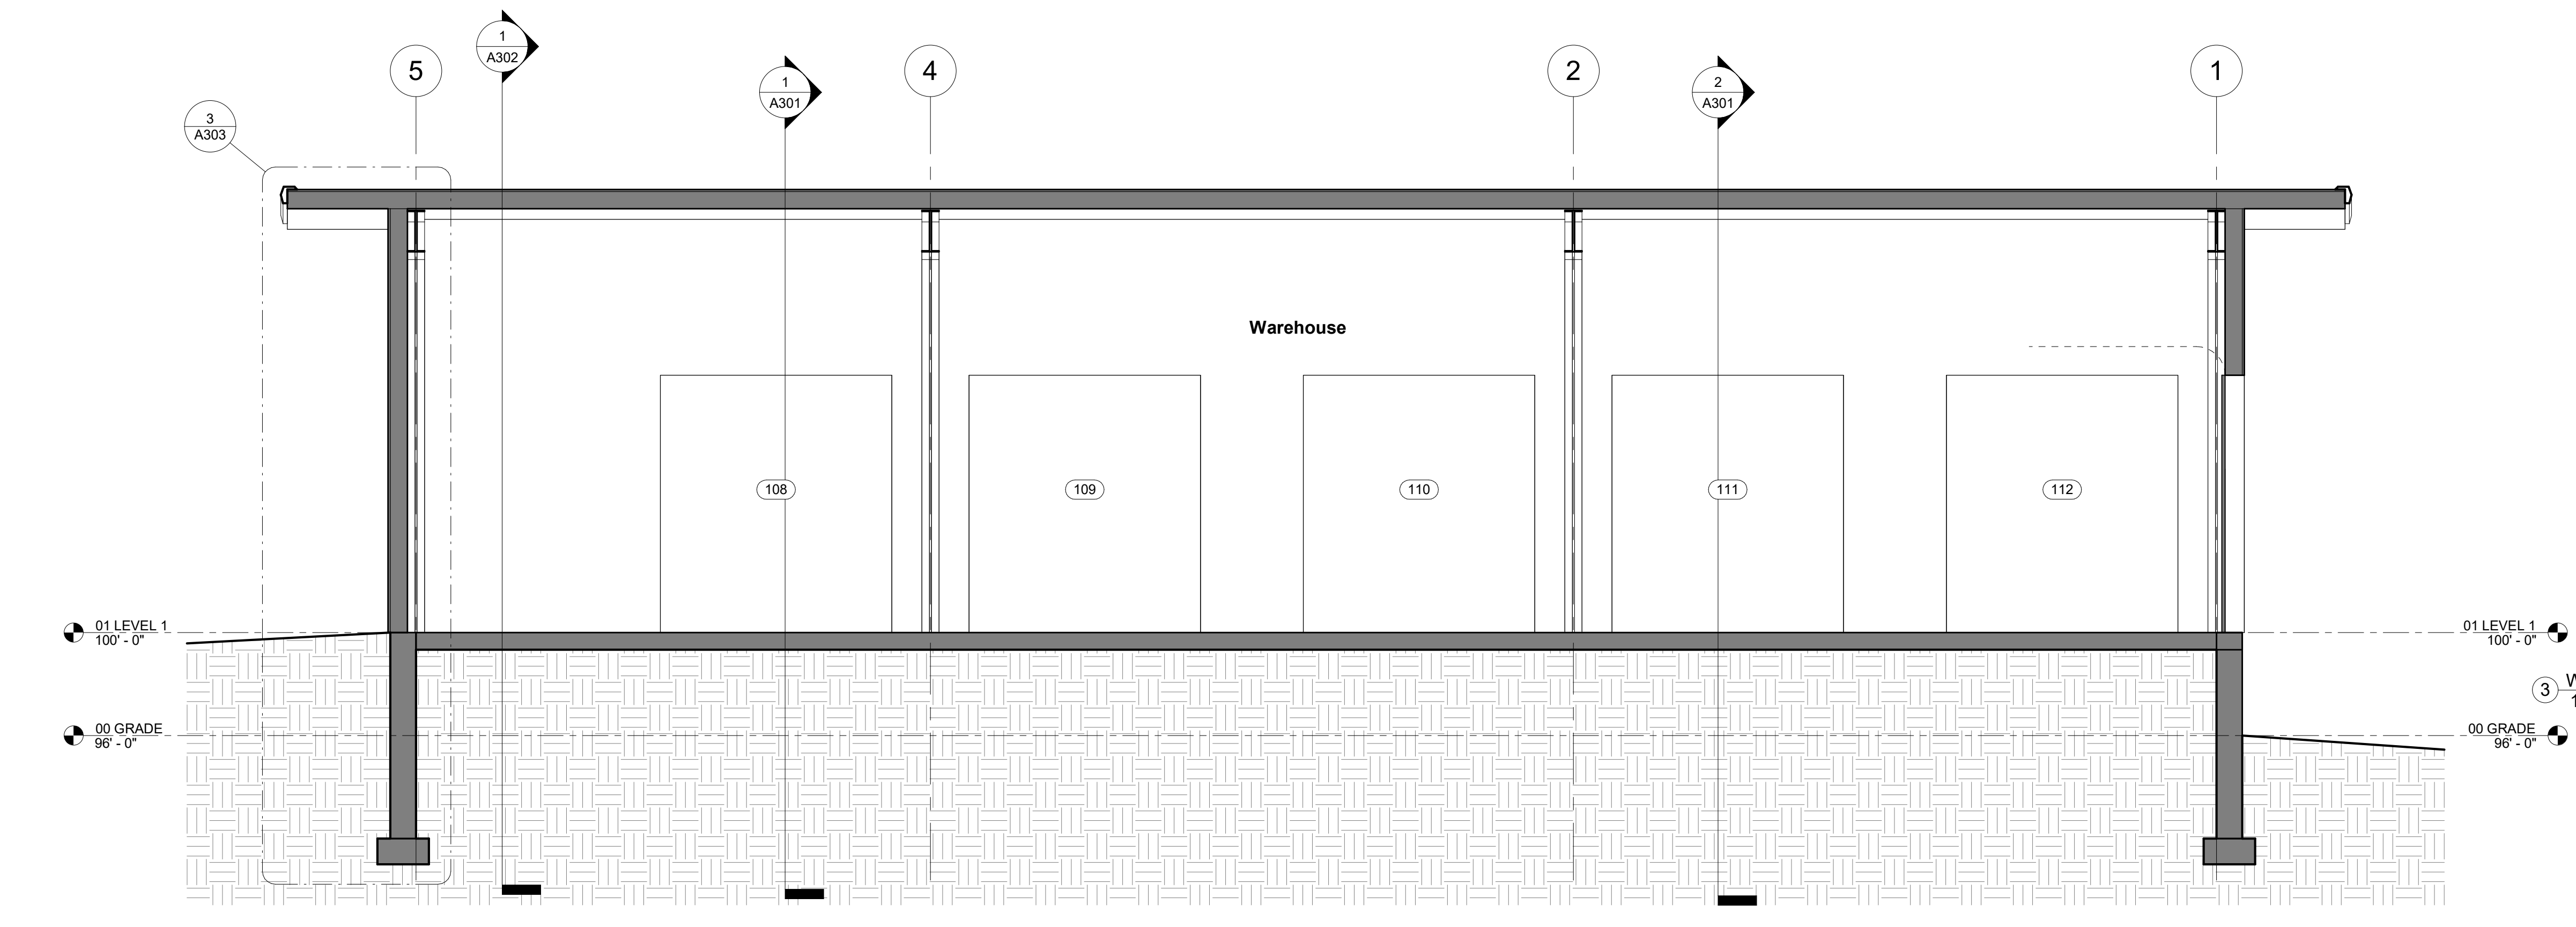

2 Section 6  
1/4" = 1'-0"

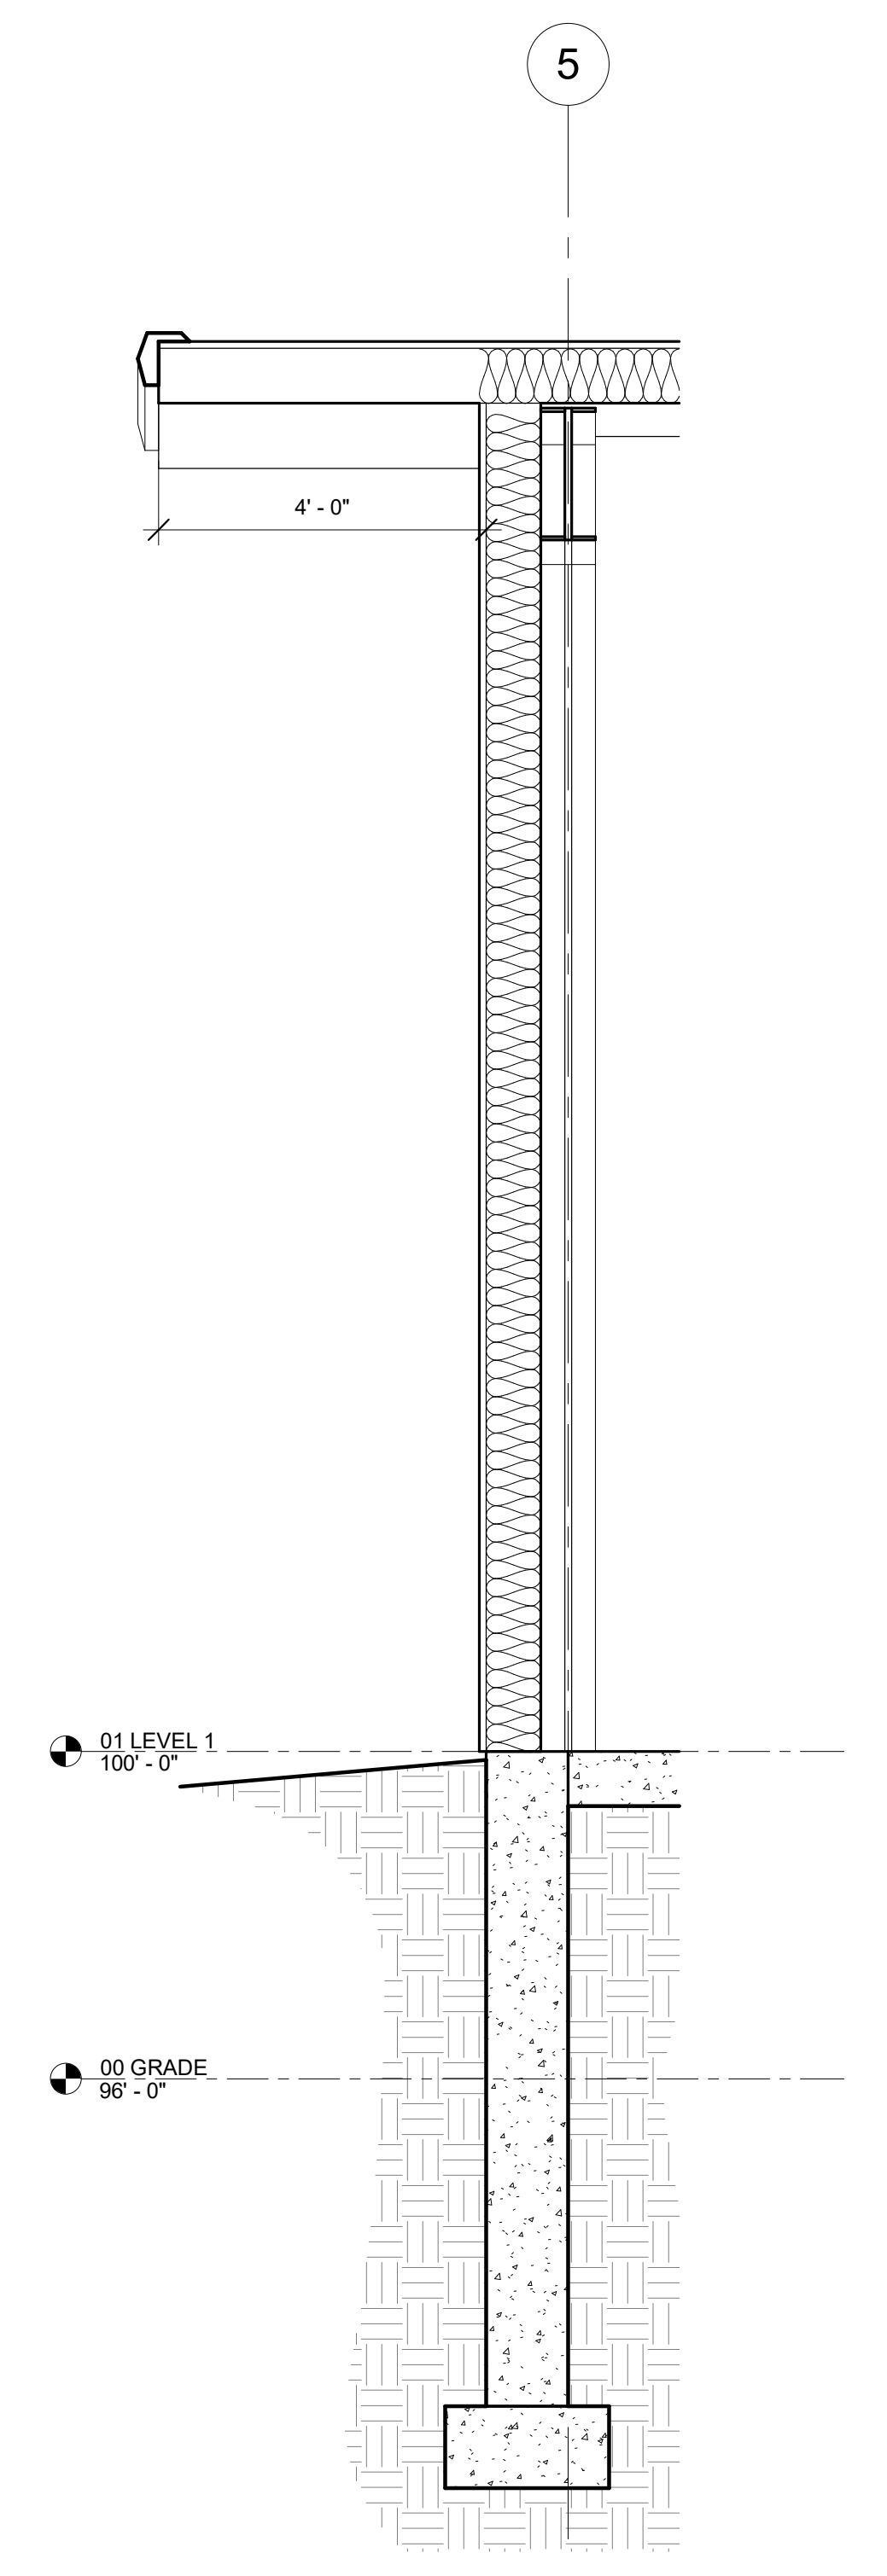

3 WALL SECTION 3  
1/2" = 1'-0"





CASPER  
200 PRONGHORN  
CASPER, WY 82601  
P: 307-266-2524

# Drainage Study for Cross Country Freight Site Development

## 999 TKS Court Mills, WY

Prepared for: Caspar Building Systems

Prepared by: Jason Meyers, PE

Date: March 10, 2025

### INTRODUCTION

The proposed Cross Country Freight site development is located at 999 TKS Court, Mills, WY. The site encompasses approximately 5.0 acres of undeveloped land on Lots 11 and 12 of the Opportunity Subdivision to the City of Mills. The proposed development will include a 4,375 SF warehouse building and asphalt surfacing.

The Drainage Study will evaluate the pre-development runoff characteristics, post-development runoff characteristics, and determine stormwater detention requirements.

### ANALYSIS PROCEDURE

The planning, design, and analysis of the existing and proposed improvements is conducted in accordance with the requirements and recommendations set forth in the City of Casper Storm Water Management Design Manual (SWMDM). Topography and existing improvements were collected through field survey information and available GIS information. This information is used to calculate the contributing basin drainage areas, ground slopes, and the ratio of improved and unimproved areas. The storm water runoff analysis for the pre-development and post-development conditions is conducted using the Rational Method. The use of this method is recommended for analysis of runoff for areas less than 200 acres. The detention pond analysis and outlet is modeled using Hydrology Studio software.

### PRE DEVELOPMENT CONDITIONS

The site consists of one drainage basin. The Basin delineation is presented on the attached Pre-Developed Conditions drawing.

The Pre Development basin encompasses 5.0 acres and is undeveloped land with native grass cover. The basin slopes generally from the north-east to the south-west with slopes ranging from 3.2% to 0.6%. The runoff coefficient used for analysis is 0.3.

CASPER

RAWLINS

DEDICATED TO CLIENTS. REFINED BY EXCELLENCE.



The peak 10-year and 100-year runoff rates are 1.7 cfs and 3.3 cfs, respectively. These runoff rates are used to determine the peak post development release rates from the site.

**POST DEVELOPMENT CONDITIONS**

The post development is the same as the pre development basin in size and general slope. The post development basin includes 60% of building roof and hard surfacing. The remaining 40% of the basin is undisturbed native grass. The combined runoff coefficient used for analysis is 0.66.


The peak 10-year and 100-year runoff rates are 6.6 cfs and 11.7 cfs, respectively. Runoff is directed overland to the south-west corner of the site to a proposed stormwater detention pond.

The stormwater detention bottom elevation is 5293.0' and an overflow elevation of 5294.0' for a total volume of 7,300 cubic feet (CF). The outlet of the pond is a 10" culvert discharging to the west. The 10-year discharge is 1.9 cfs. See Appendix A for pond routing

Storm runoff greater than the 10-year event will overtop the pond to the west.

**CONCLUSION**

This drainage study addresses the pre-development and post-development runoff from the proposed Cross Country Freight site. The proposed stormwater detention area and discharge structure releases 10-year runoff rates at pre-development rates.



Jason Meyers, PE

# Hydrograph Report

Hydrology Studio v 3.0.0.35

## APPENDIX A


Item # 2.

File: CCF 2-28-25.hys  
03-06-2025

### Pre CCF SITE

### Hyd. No. 1

Hydrograph Type	= Rational	Peak Flow	= 1.779 cfs
Storm Frequency	= 10-yr	Time to Peak	= 56 min
Time Interval	= 1 min	Runoff Volume	= 5,977 cuft
Drainage Area	= 5.0 ac	Runoff Coeff.	= 0.3
Tc Method	= User	Time of Conc. (Tc)	= 56.0 min
IDF Curve	= CASPER IDF.idf	Intensity	= 1.19 in/hr
Freq. Corr. Factor	= 1.00	Asc/Rec Limb Factors	= 1/1

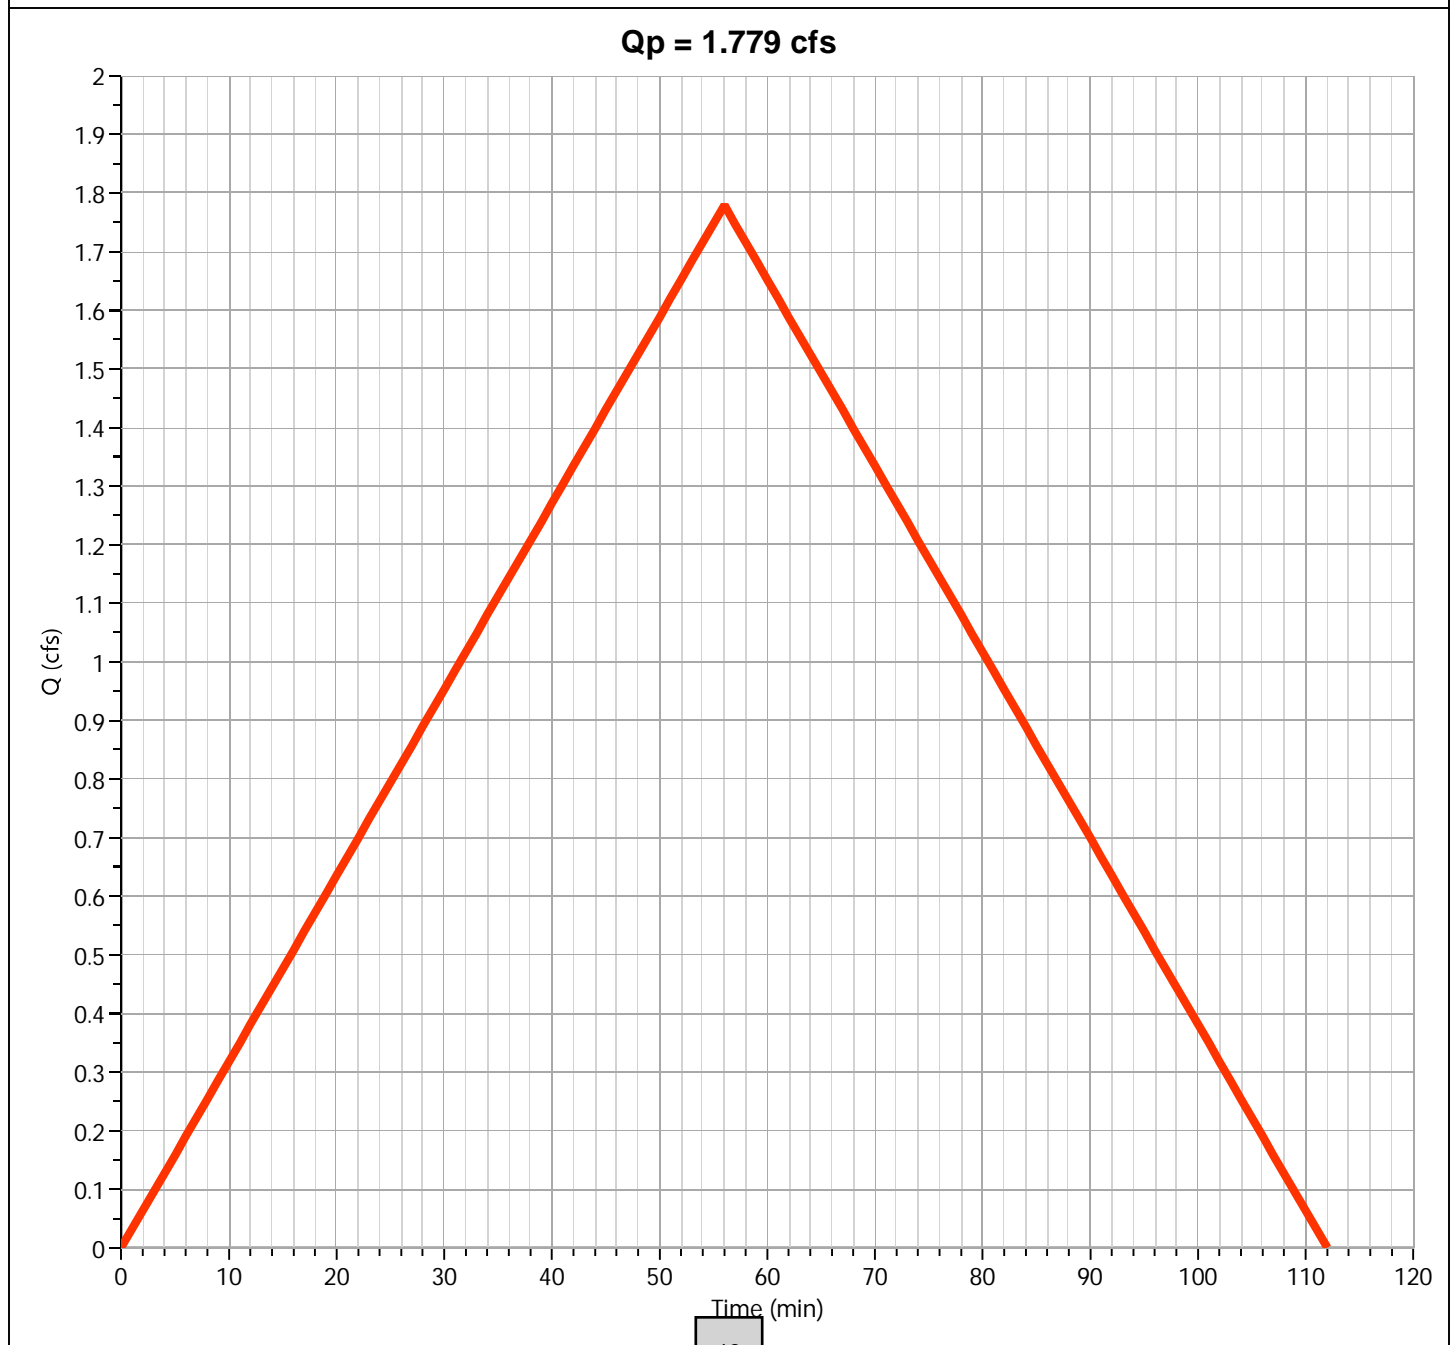

# Hydrograph Report

Hydrology Studio v 3.0.0.35


Item # 2.

File: CCF 2-28-25.hys  
03-06-2025

## POST CCF SITE

## Hyd. No. 2

Hydrograph Type	= Rational	Peak Flow	= 6.593 cfs
Storm Frequency	= 10-yr	Time to Peak	= 25 min
Time Interval	= 1 min	Runoff Volume	= 9,890 cuft
Drainage Area	= 5.0 ac	Runoff Coeff.	= 0.66
Tc Method	= User	Time of Conc. (Tc)	= 25.0 min
IDF Curve	= CASPER IDF.idf	Intensity	= 2.00 in/hr
Freq. Corr. Factor	= 1.00	Asc/Rec Limb Factors	= 1/1

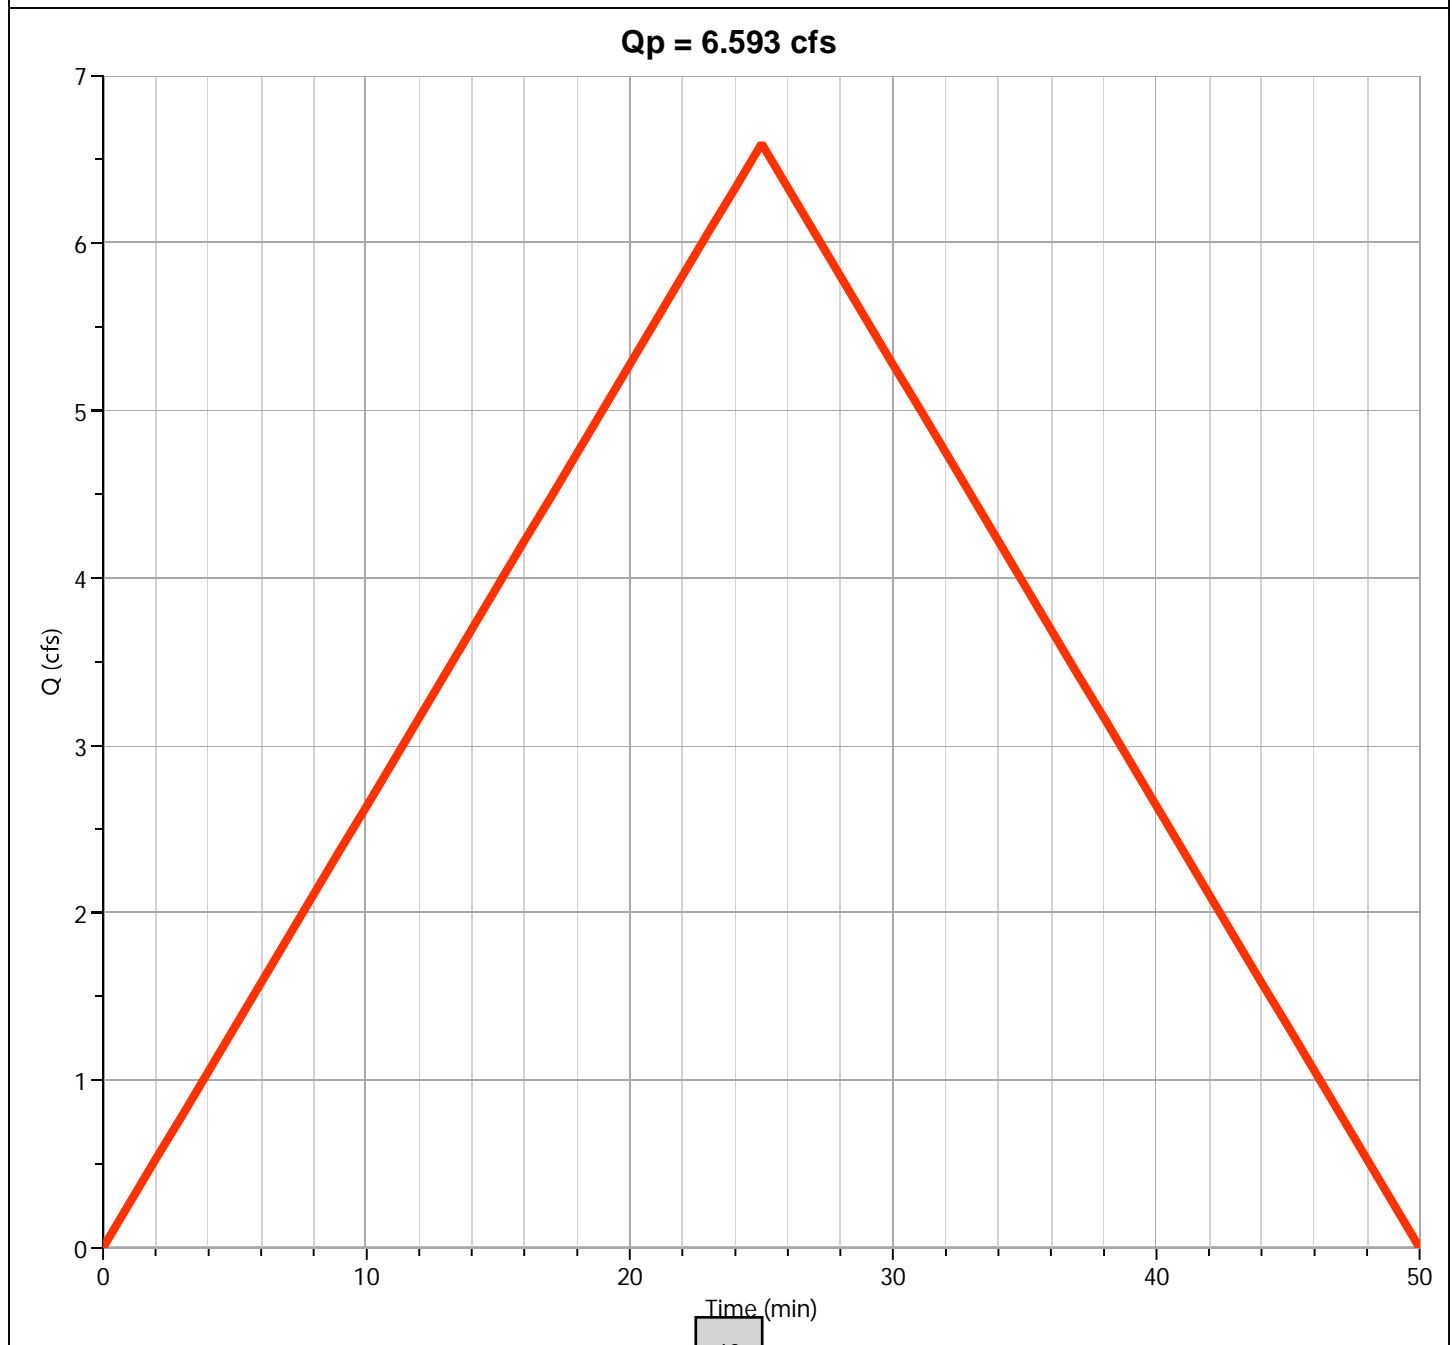

# Hydrograph Report

Hydrology Studio v 3.0.0.35

Item # 2.

File: CCF 2-28-25.hys  
03-06-2025


## Hyd. No. 3

Hydrograph Type	= Pond Route	Peak Flow	= 1.907 cfs
Storm Frequency	= 10-yr	Time to Peak	= 43 min
Time Interval	= 1 min	Hydrograph Volume	= 9,858 cuft
Inflow Hydrograph	= 2 - POST CCF SITE	Max. Elevation	= 5293.99 ft
Pond Name	= DETENTION POND	Max. Storage	= 7,248 cuft

Pond Routing by Storage Indication Method

Center of mass detention time = 1.09 hrs

**Qp = 1.907 cfs**

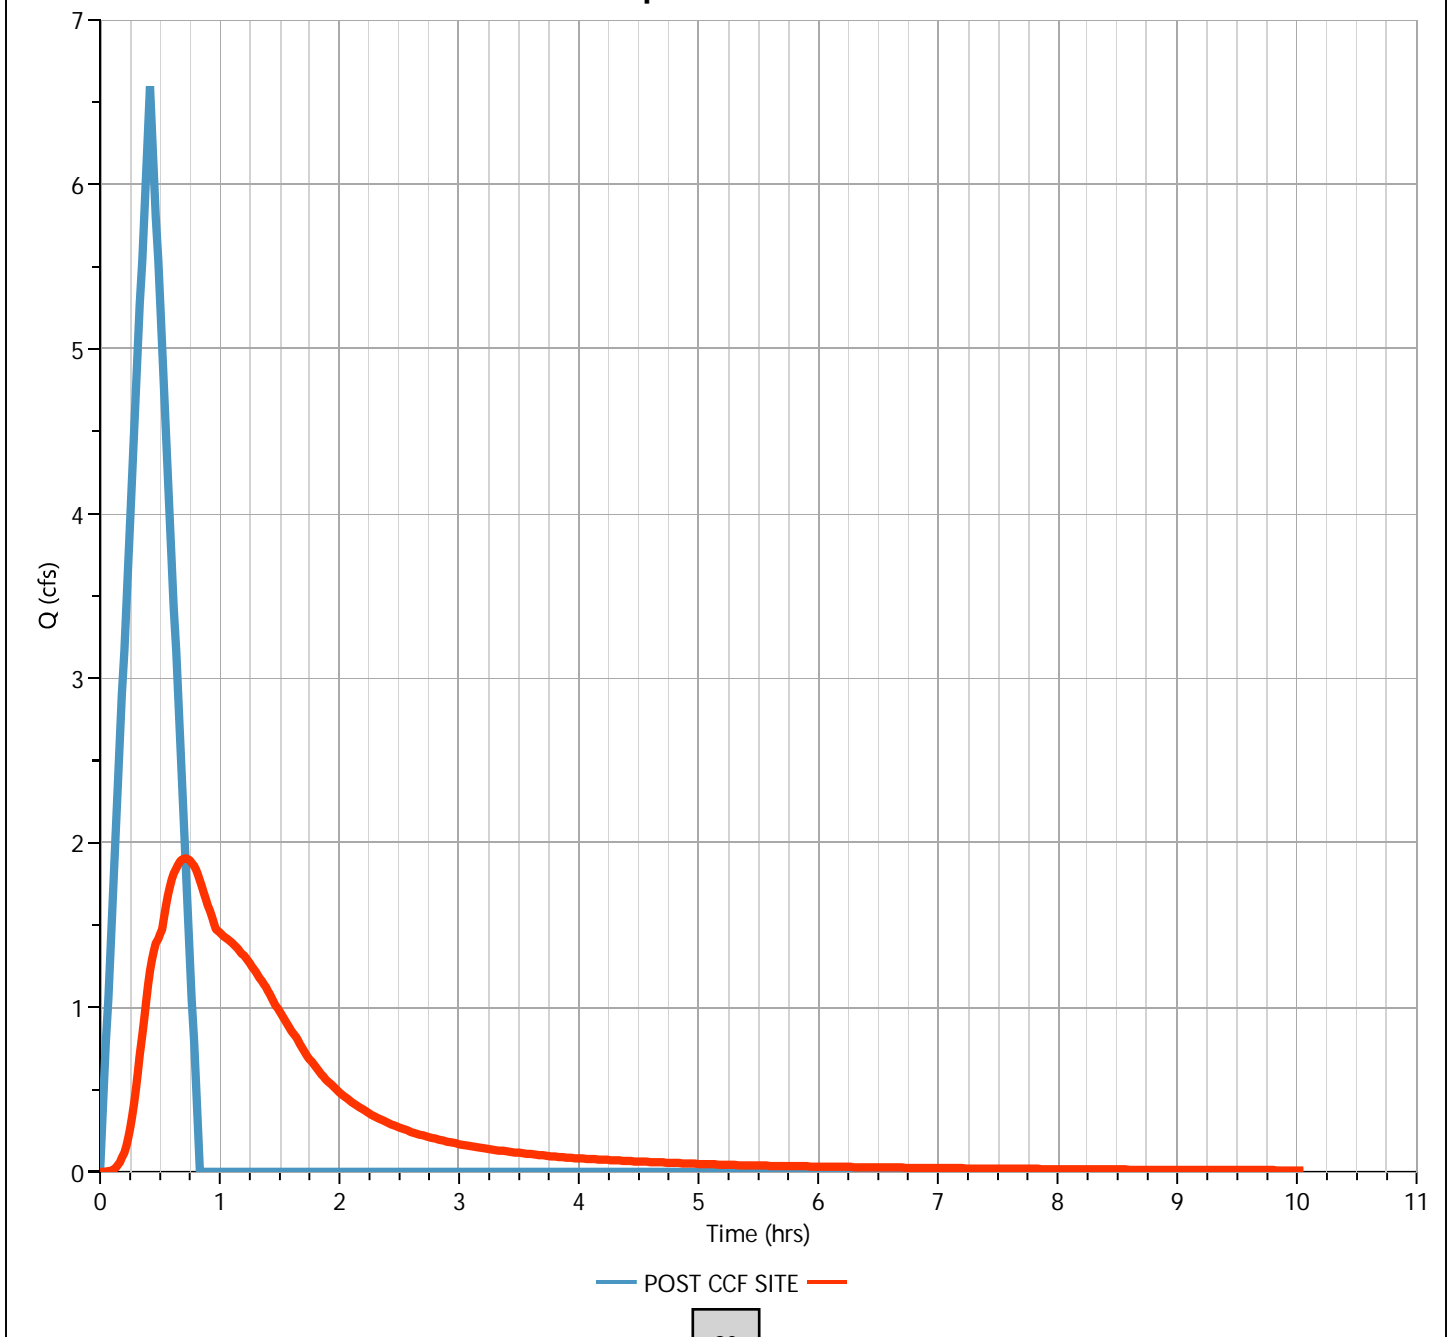




# Pond Report

## DETENTION POND

## Stage-Discharge

Culvert / Orifices	Culvert	Orifice			Perforated Riser
		1	2	3	
Rise, in	10				Hole Diameter, in
Span, in	10				No. holes
No. Barrels	1				Invert Elevation, ft
Invert Elevation, ft	5293.00				Height, ft
Orifice Coefficient, Co	0.60				Orifice Coefficient, Co
Length, ft	10				
Barrel Slope, %	2				
N-Value, n	0.013				
Weirs	Riser	Weir			Ancillary
		1	2	3	
Shape / Type					Exfiltration, in/hr
Crest Elevation, ft					
Crest Length, ft					
Angle, deg					
Weir Coefficient, Cw					

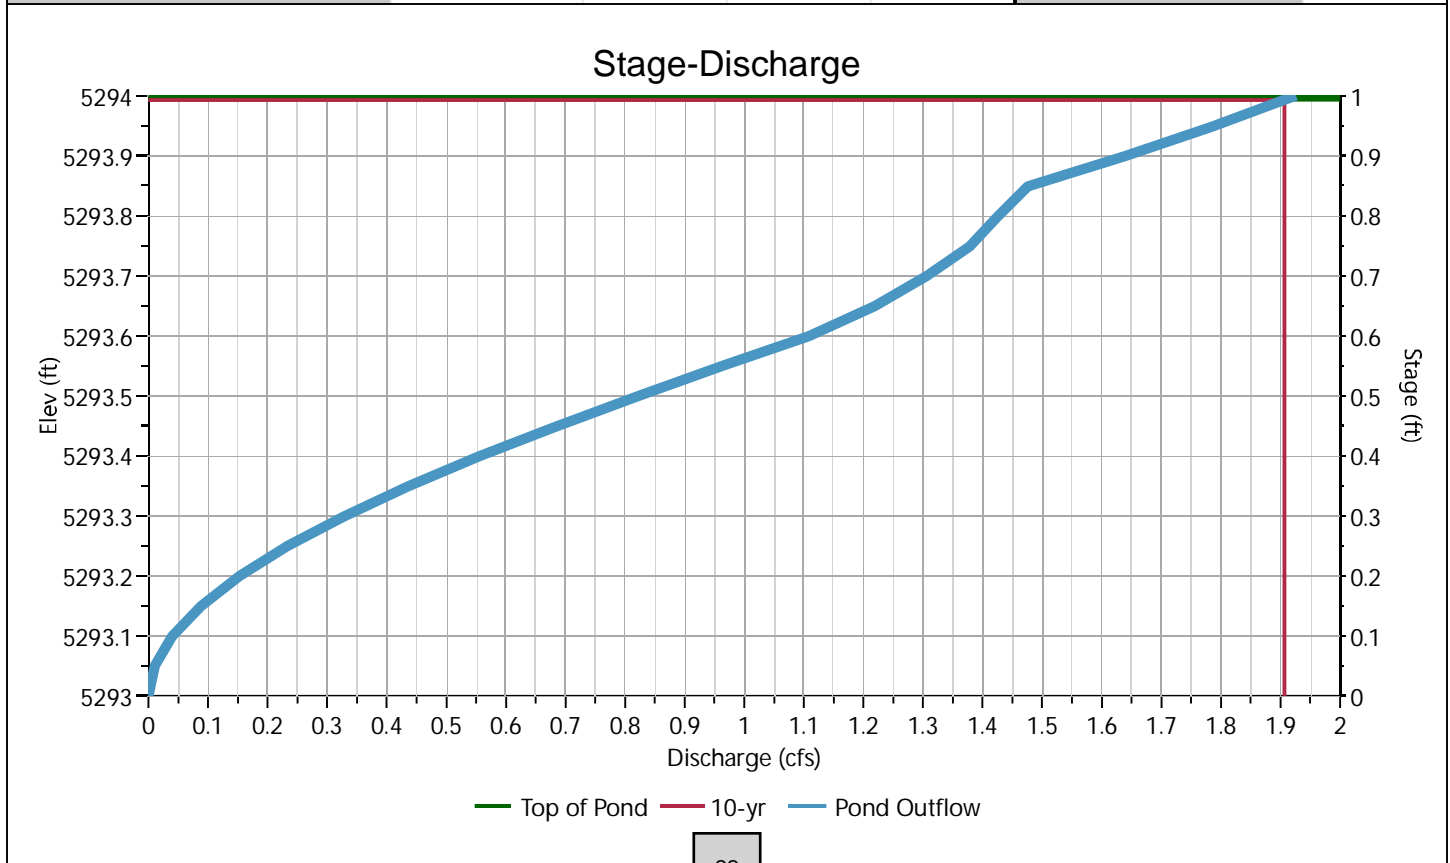

# Pond Report

## DETENTION POND

## Stage-Storage-Discharge Summary

Stage (ft)	Elev. (ft)	Storage (cuft)	Culvert (cfs)	Orifices, cfs			Riser (cfs)	Weirs, cfs			Pf Riser (cfs)	Exfil (cfs)	User (cfs)	Total (cfs)
				1	2	3		1	2	3				
0.00	5293.00	0.000	0.000											0.000
0.50	5293.50	3,230	0.824 ic											0.824
1.00	5294.00	7,301	1.926 oc											1.926

Suffix key: ic = inlet control, oc = outlet control, s = submerged weir

# Hydrograph Report

Hydrology Studio v 3.0.0.35


Item # 2.

File: CCF 2-28-25.hys  
03-06-2025

## Pre CCF SITE

## Hyd. No. 1

Hydrograph Type	= Rational	Peak Flow	= 3.504 cfs
Storm Frequency	= 100-yr	Time to Peak	= 56 min
Time Interval	= 1 min	Runoff Volume	= 11,775 cuft
Drainage Area	= 5.0 ac	Runoff Coeff.	= 0.3
Tc Method	= User	Time of Conc. (Tc)	= 56.0 min
IDF Curve	= CASPER IDF.idf	Intensity	= 1.87 in/hr
Freq. Corr. Factor	= 1.25	Asc/Rec Limb Factors	= 1/1

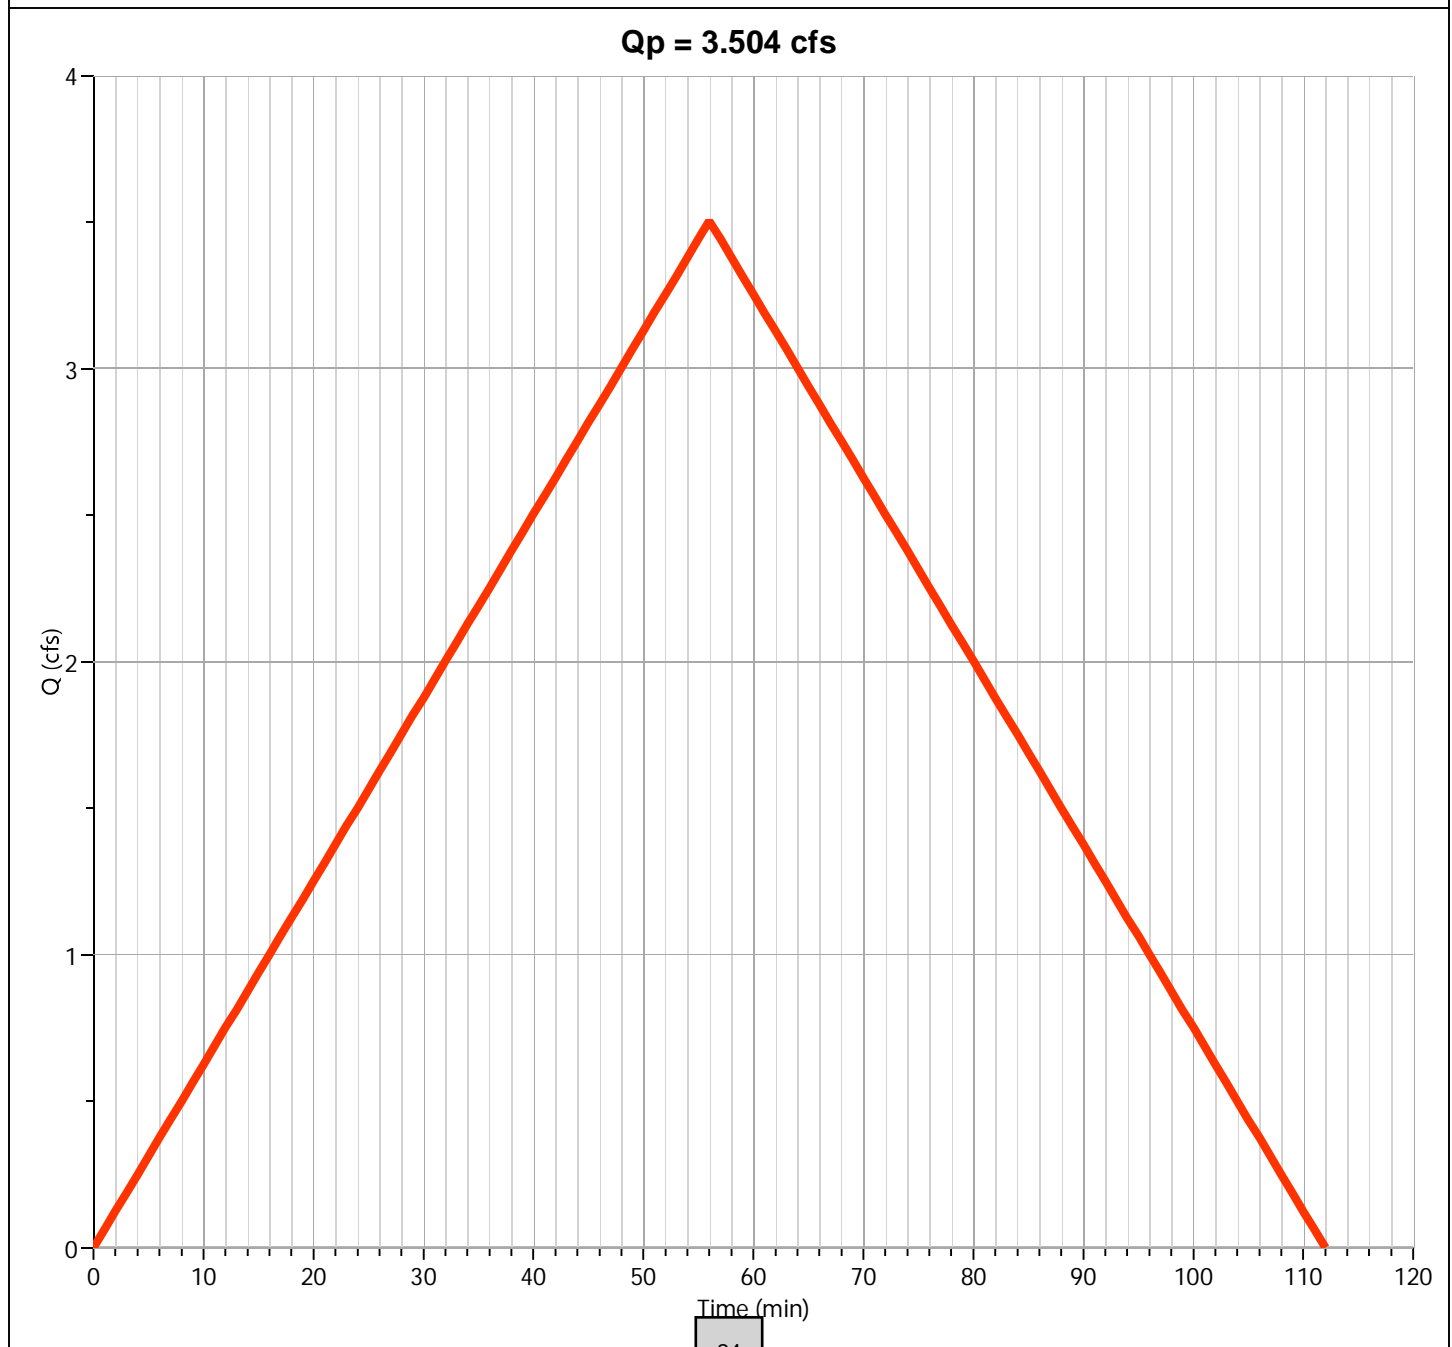



# Hydrograph Report

Hydrology Studio v 3.0.0.35


Item # 2.


File: CCF 2-28-25.hys  
03-06-2025

## POST CCF SITE

## Hyd. No. 2

Hydrograph Type	= Rational	Peak Flow	= 13.04 cfs
Storm Frequency	= 100-yr	Time to Peak	= 25 min
Time Interval	= 1 min	Runoff Volume	= 19,556 cuft
Drainage Area	= 5.0 ac	Runoff Coeff.	= 0.66
Tc Method	= User	Time of Conc. (Tc)	= 25.0 min
IDF Curve	= CASPER IDF.idf	Intensity	= 3.16 in/hr
Freq. Corr. Factor	= 1.25	Asc/Rec Limb Factors	= 1/1

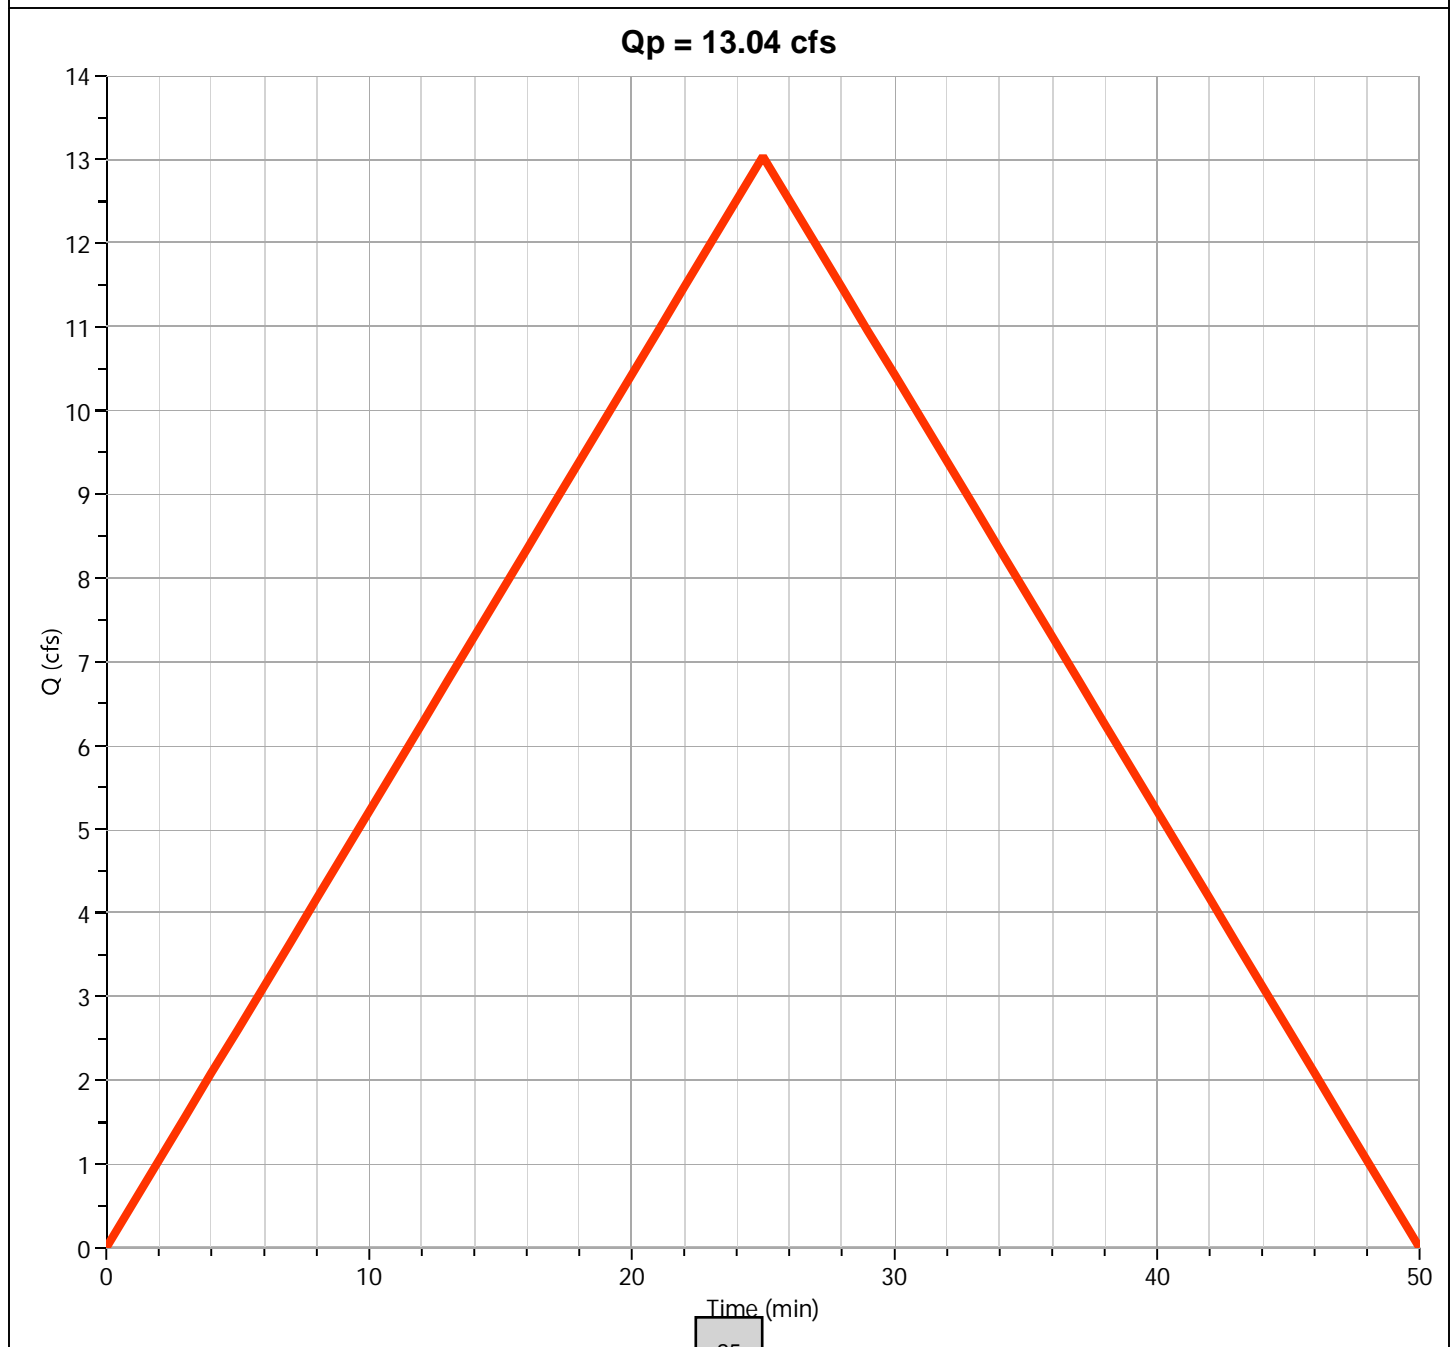

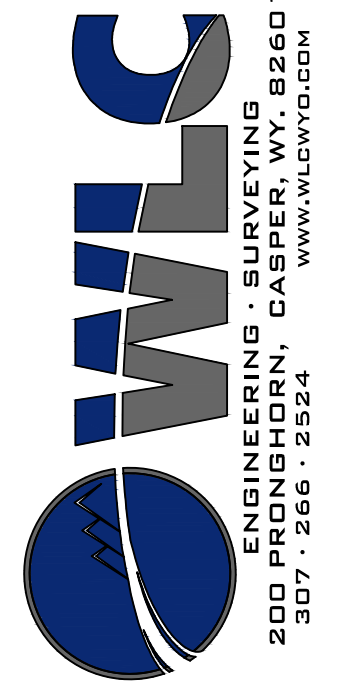



Drawg. By: JLM W.O. No.: 18041  
Chk. By: FCF Book No.:  
Acad File: CCF DESIGN\_CURRENT.dwg  
FOR: CASPAR BUILDING SYSTEMS  
1975 SALT CREEK HWY  
CASPER, WY 82601

REVISIONS

CROSS COUNTRY FREIGHT  
PRE DEVELOPMENT DRAINAGE BASIN

SHEET NO.  
1 OF 1  
DATE:  
3/6/25

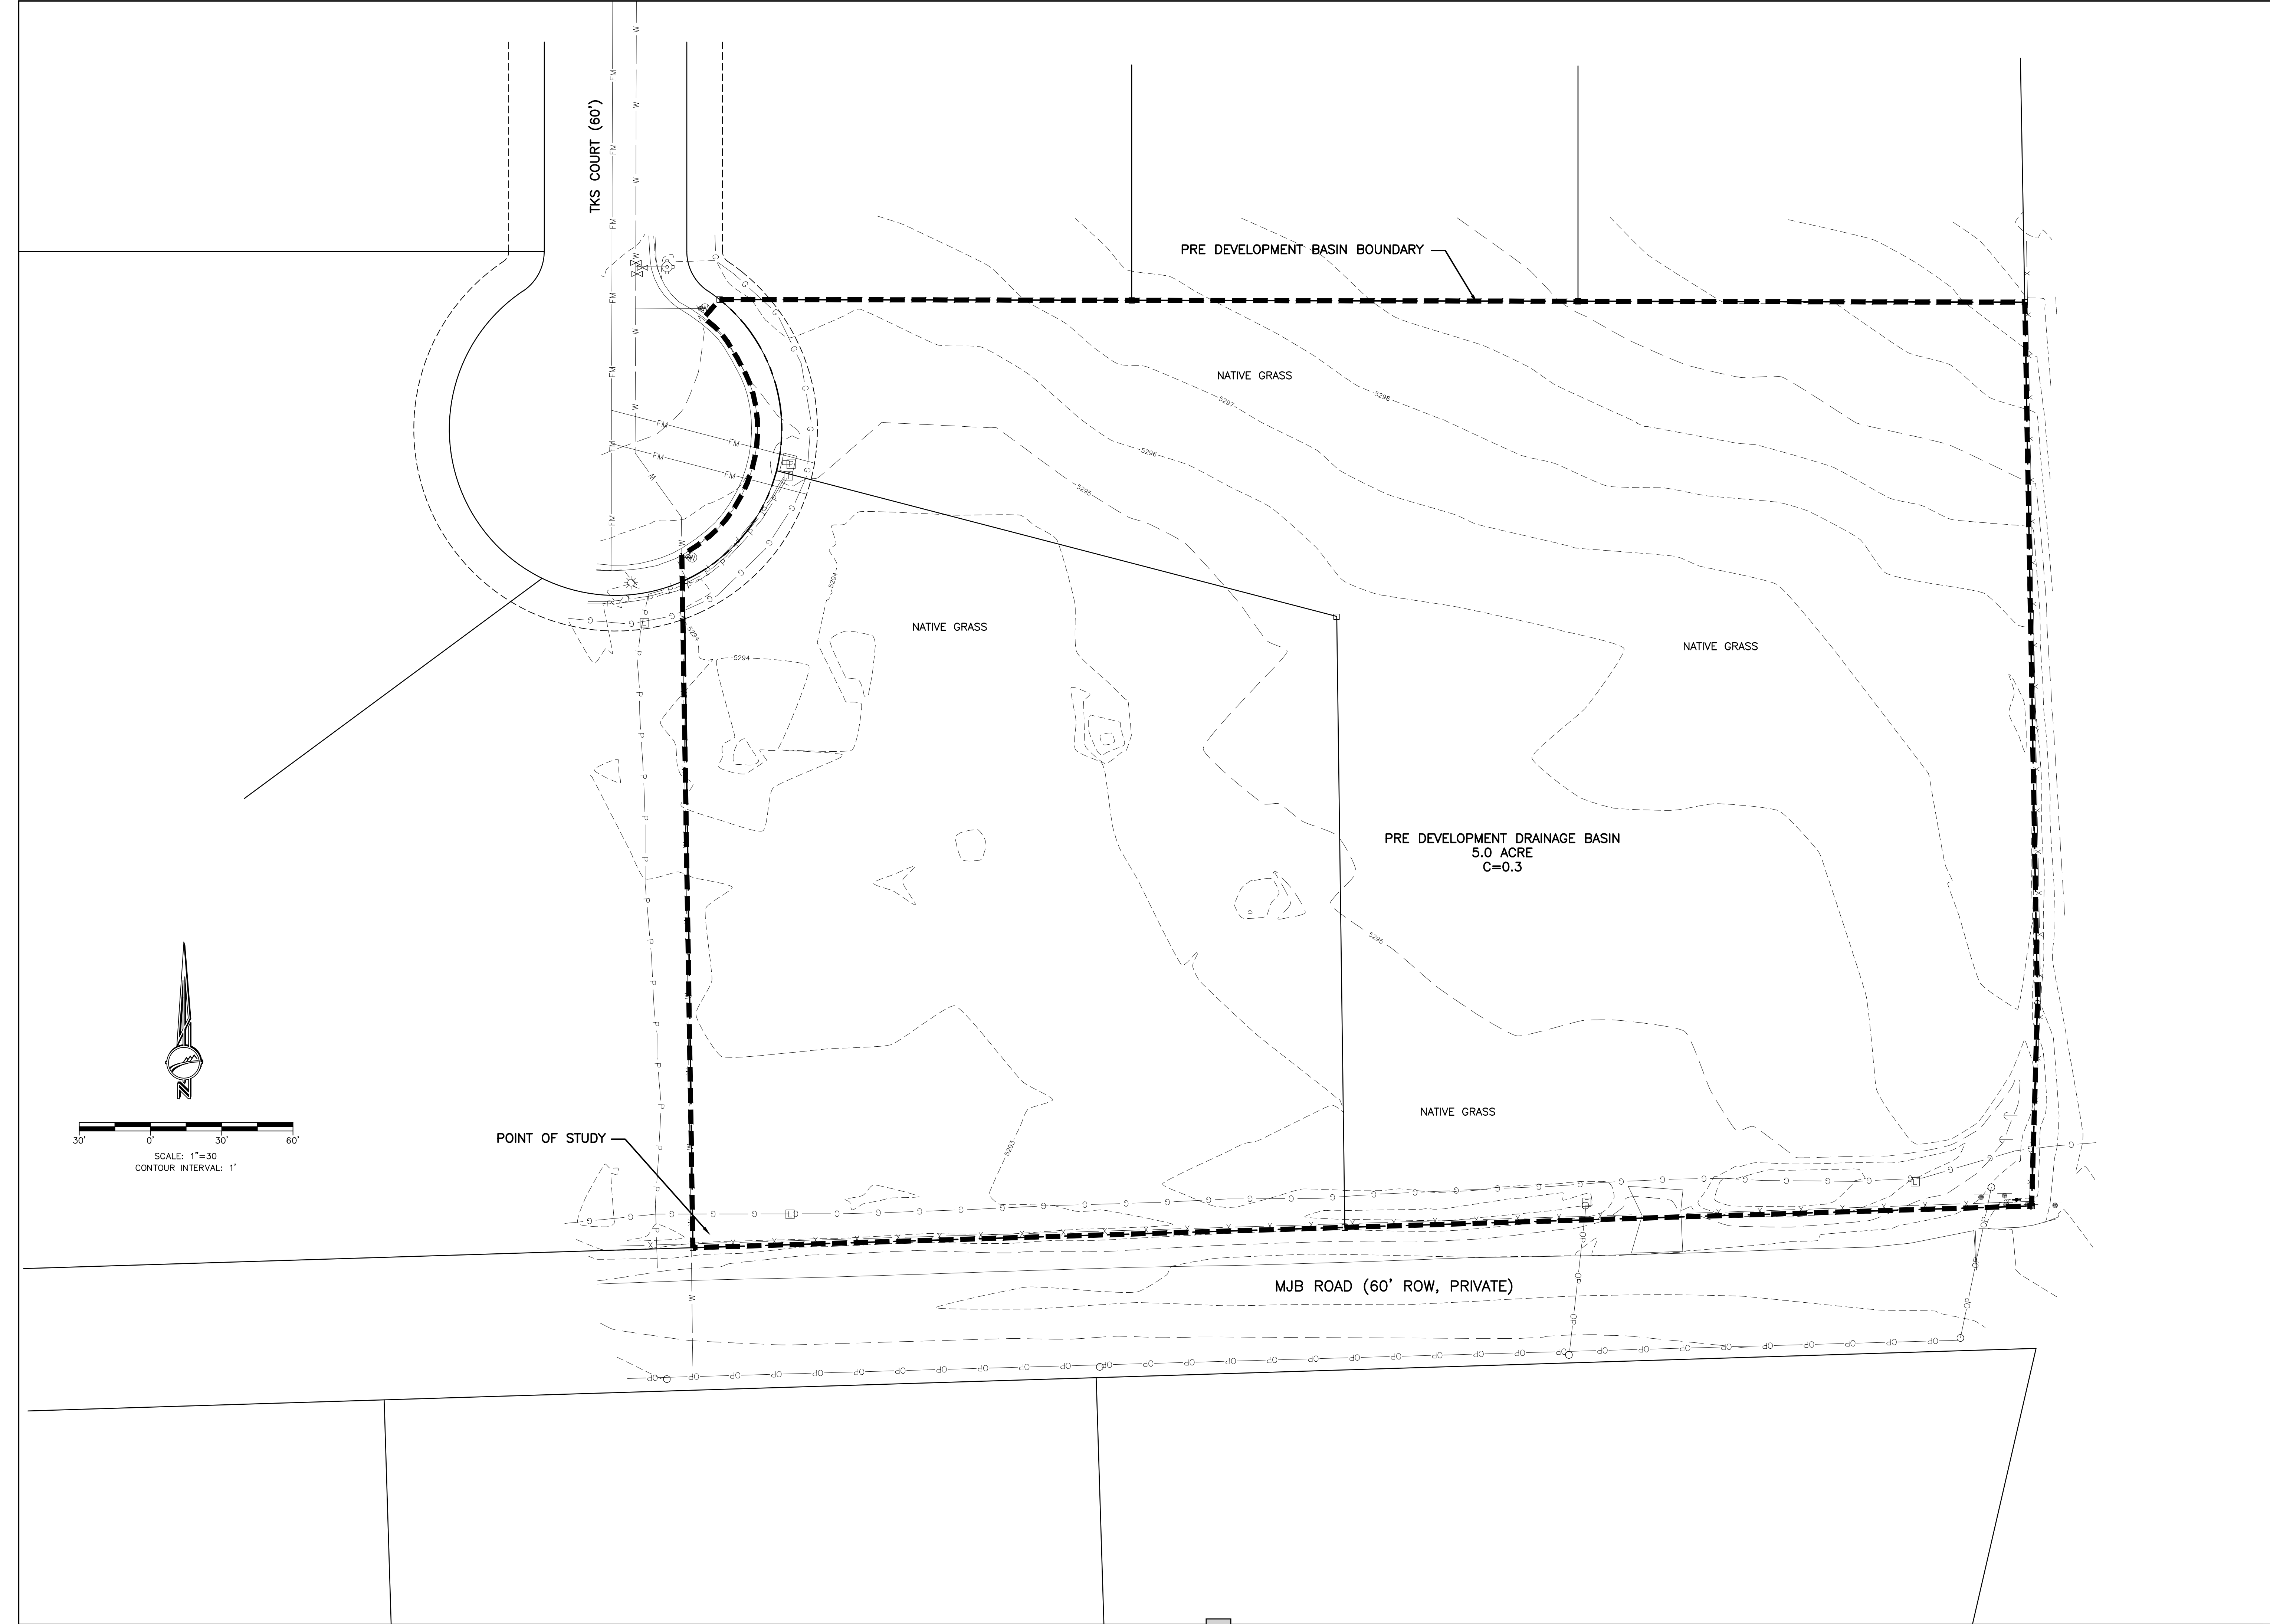

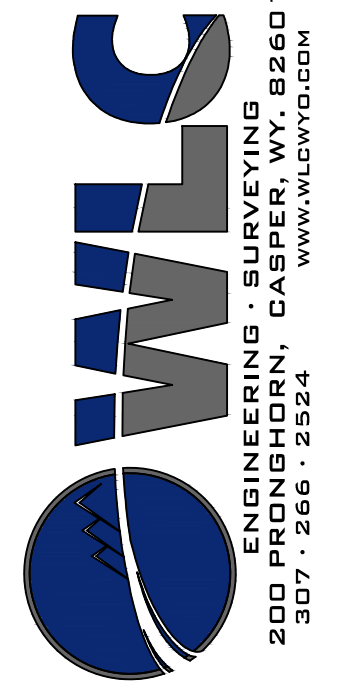

Drawn By: JLM W.O. No.: 1804-1  
Chk. By: FGF Book No.:  
Acad File: CCF DESIGN\_CURRENT.dwg  
FOR: CASPAR BUILDING SYSTEMS  
1975 SALT CREEK HWY  
CASPER, WY 82601

REVISIONS

CROSS COUNTRY FREIGHT  
POST DEVELOPMENT DRAINAGE BASIN

SHEET NO.  
1 OF 1  
DATE:  
3/6/25



# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## FEATURES

- Low profile LED wall luminaire with a variety of IES distributions for lighting applications such as retail, commercial and industrial building mount
- Featuring Strike and Micro Strike Optics which maximizes target zone illumination with minimal losses at the house-side, reducing light trespass issues
- Visual Comfort - Option for Size 2 and Size 3
- Control options including photo control, occupancy sensing, NX Distributed Intelligence™, and LightGRID+.
- Battery Backup options available for emergency code compliance
- Quick-mount adapter allows easy installation/maintenance
- 347V and 480V versions for industrial applications and Canada



## CONTROL TECHNOLOGY



## SPECIFICATIONS

### CONSTRUCTION

- Die-cast housing with hidden vertical heat fins that are optimal for heat dissipation while keeping a clean smooth outer surface
- Corrosion resistant, die-cast aluminum housing with powder coat paint finish
- Powder paint finish provides durability in outdoor environments. Tested to meet 1000 hour salt spray rating

### OPTICS

- Entire optical aperture illuminates to create a larger luminous surface area resulting in a low glare appearance without sacrificing optical performance
- 2700K, 3000K, 3500K, 4000K and 5000K CCTs
- Zero uplight distributions
- LED optics provide IES type II, III and IV distributions.

### INSTALLATION

- Quick-mount adapter provides easy installation to wall or to recessed junction boxes (4" square junction box)
- Designed for direct j-box mount.

### ELECTRICAL

- 120V-277V universal voltage 50/60Hz 0-10V dimming drivers
- 347V input is available in most wattage, 480V is available for 55W and above.
- Ambient operating temperature -40°C to 40°C
- Driver RoHS and IP66
- 10kV Surge Protector optional
- Drivers have greater than .90 power factor and less than 20% Total Harmonic Distortion
- Dual Driver option provides 2 drivers within luminaire but only one set of leads exiting the luminaire, where Dual Power Feed provides two drivers which can be wired independently as two sets of leads are extended from the luminaire. Both options can not be included in one same fixture.
- Dimming drivers are standard. Select CD (Customer Dimming) for the dimming wires to be extended outside the fixture.

### CONTROLS

- Photo control, occupancy sensor and wireless available for complete on/off and dimming control
- Button photocontrol is suitable for 120-277V operation
- NX Distributed Intelligence™ available with in fixture wireless control module, features dimming and occupancy sensor

### CONTROLS CONTINUED

- Integral Battery Backup provides emergency lighting for the required 90 minute path of egress
- Battery Backup suitable for operating temperatures -20°C to 40°C.
- Please consult brand or sales representative when combining control and electrical options as some combinations may not operate as anticipated depending on your application.
- LightGRID+ available with in fixture wireless control module, features dimming and occupancy sensor.

### CERTIFICATIONS

- Certified to UL 1598 and CSA 22.2#250.0-24
- IP65 rated housing
- Emergency battery backup options are California Energy Commission (CEC) Title 20 Compliant
- This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) and Trade Agreements Act (FAR 52.225- 11). See Buy America(n) Solutions (link to <https://http://www.currentlighting.com/resources/americasolutions>).
- DarkSky approved with 3000K CCT or warmer

### WARRANTY

- 5 year limited warranty


DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_

TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_

CATALOG #: \_\_\_\_\_

Item # 2.

## MICRO STRIKE | OPTICS STRIKE

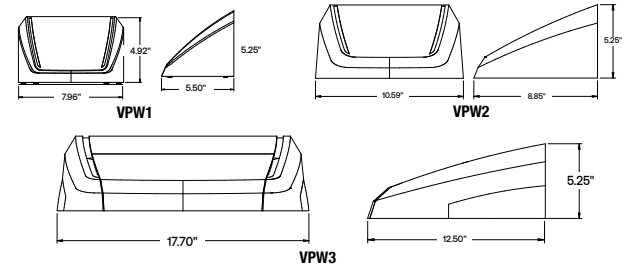

	Weight
VPW1	4.1 lbs / 1.86 kg
VPW2	7.15 lbs / 3.24 kg
VPW3	17.1 lbs / 7.80 kg

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## ORDERING GUIDE

Example: VPW1-24L-10-3K7-2-UNV-BLS

CATALOG # \_\_\_\_\_

Series	# LEDs - Wattage	CCT/CRI	Distribution	Voltage	Color	
VPW1 Viper Wall 1	<b>24L-10</b> 1,000 Lumens	<b>27K8</b> 2700K, 80 CRI <sup>16</sup>	<b>FR</b> Auto Front Row <sup>7,15</sup>	<b>UNV</b> 120-277V	<b>BLT</b> Black Matte Textured	
	<b>24L-15</b> 2,000 Lumens	<b>3K7</b> 3000K, 70 CRI <sup>16</sup>	<b>2</b> IES TYPE 2	<b>120</b> 120V	<b>BLS</b> Black Gloss Smooth	
	<b>24L-25</b> 3,000 Lumens	<b>4K7</b> 4000K, 70 CRI	<b>3</b> IES TYPE 3	<b>208</b> 208V	<b>DBT</b> Dark Bronze Matte Textured	
	VPW2 Viper Wall 2	<b>48L-15</b> 2,000 Lumens	<b>5K7</b> 5000K, 70 CRI	<b>4F</b> IES TYPE 4 Forward	<b>240</b> 240V	<b>DBS</b> Dark Bronze Gloss Smooth
		<b>48L-20</b> 3,000 Lumens	<b>3K8</b> 3000K, 80 CRI	<b>4W</b> IES TYPE 4W	<b>277</b> 277V	<b>GTT</b> Graphite Matte Textured
		<b>48L-30</b> 4,000 Lumens	<b>35K8</b> 3500K, 80 CRI		<b>347</b> 347V	<b>LGS</b> Light Grey Gloss Smooth
		<b>48L-35</b> 5,000 Lumens	<b>4K8</b> 4000K, 80 CRI		<b>480</b> 480V	<b>LGT</b> Light Grey Matte Textured
		<b>48L-45</b> 6,000 Lumens	<b>5K8</b> 5000K, 80 CRI	<b>AP</b> Phosphor Converted Amber <sup>1</sup>		<b>PSS</b> Platinum Silver Smooth
		<b>80L-20</b> 3,000 Lumens				<b>WHT</b> White Matte Textured
		<b>80L-25</b> 4,000 Lumens				<b>WHS</b> White Gloss Smooth
<b>80L-35</b> 5,000 Lumens					<b>VGT</b> Verde Green Textured	
<b>80L-45</b> 6,000 Lumens					<b>Color Option</b>	
<b>80L-55</b> 7,000 Lumens					<b>CC</b> Custom Color	
VPW3 Viper Wall 3	<b>18L-25</b> 3,000 Lumens, Strike Optics					
	<b>18L-30</b> 4,000 Lumens, Strike Optics					
	<b>18L-39</b> 4,750 Lumens, Strike Optics					
	<b>18L-50</b> 6,000 Lumens, Strike Optics					
	<b>18L-60</b> 6,500 Lumens, Strike Optics					
	<b>160L-45</b> 7,000 Lumens					
	<b>160L-70</b> 10,000 Lumens					
	<b>160L-95</b> 12,500 Lumens					
	<b>160L-105</b> 15,000 Lumens					
	<b>160L-135</b> 17,500 Lumens					
<b>160L-155</b> 20,000 Lumens						
<b>36L-55</b> 7,000 Lumens, Strike Optics						
<b>36L-80</b> 9,500 Lumens, Strike Optics						
<b>36L-100</b> 11,500 Lumens, Strike Optics						
<b>36L-120</b> 13,000 Lumens, Strike Optics						

Control Options Network <sup>3,7,11,13</sup>	
<b>NXWS12F</b>	NX Networked Wireless Enabled Integral NXSMP2-OMNI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>14</sup>
<b>NXWS16F</b>	NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>9</sup>
<b>NXWS24F</b>	NX Networked Wireless Enabled Integral NXSMP2-OMNI-HM PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>9</sup>
<b>NXWS40F</b>	NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>9</sup>
<b>NXW</b>	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor
<b>WIR</b>	LightGRID+ In-Fixture Module <sup>9</sup>
<b>WIRSC</b>	LightGRID+ In-Fixture Module with BTS occupancy <sup>9</sup>
Stand Alone Sensors <sup>7,11,13</sup>	
<b>BTS-14F</b>	Bluetooth® Programmable, PIR Occupancy/Daylight Sensor <sup>4,9</sup>
<b>BTS-40F</b>	Bluetooth® Programmable, PIR Occupancy/Daylight Sensor <sup>4,9</sup>
<b>BTSO-12F</b>	Bluetooth® Programmable, PIR Occupancy/Daylight Sensor, up to 12' mounting height <sup>14</sup>
Photocontrol <sup>13</sup>	
<b>PC</b>	Button Photocontrol 120-277V

Options	
<b>F</b>	Fusing <sup>5,7</sup>
<b>E</b>	Battery <sup>6,7,8</sup>
<b>EH</b>	Battery with Heater <sup>6,7,8</sup>
<b>CS</b>	Comfort Shield <sup>7,10</sup>
<b>SP</b>	10kA Surge Protector
<b>2PF</b>	Dual Power Feed <sup>2,7,8</sup>
<b>2DR</b>	Dual Driver <sup>2,7,8</sup>
<b>CD</b>	Customer Dimming <sup>2</sup>
<b>DTS</b>	Dimming Transfer Switch <sup>7</sup>

- Notes:
- Available with Micro Strike Optics only
  - Not available with 480V in Size 1 and Size 2
  - Networked controls cannot be combined with other control options
  - Not available with VPW1 or with 2PF or 2DR options
  - Must specify voltage (VPW1 & VPW2: 120V, 277V or 347V; VPW3: 120V, 208V, 240V, 277V, 347V or 480V)
  - See page 10 for detail Battery configurations
  - Not available in VPW1
  - 2PF can't be combined with E or EH; 2DR can't be combined with E or EH in VPW2
  - Not available in VPW1 and VPW2
  - Not available with Micro Strike 24L and 48L. Not available with Strike 18L and 36L
  - Not available with 2PF
  - Not available with Network Control options or Stand Alone Sensors. Can be ordered with PC
  - Not available in 480V in VPW2; Only available in 480V in VPW3 in 80W, 100W, 120W, 135W and 155W
  - NXWS12F and BTSO-12F are the only sensors available in VPW2
  - Available with Strike Optics only (18L or 36L)
  - DarkSky approved with 3000K CCT or warmer

# VIPER Wall


VPW1/VPW2/VPW3 LED WALLPACK

## ACCESSORIES AND REPLACEMENT PARTS - MADE TO ORDER

Catalog Number	Description
<input type="checkbox"/> WP-BB-XXX	Back Box Accessory for conduit entry <sup>1</sup>
<input type="checkbox"/> CS	Comfort Shield <sup>2</sup>

- Notes:  
 1 replace "xxx" with color option  
 2 Not available with Micro Strike 24L and 48L or Strike 18L and 36L

### DIMENSIONS

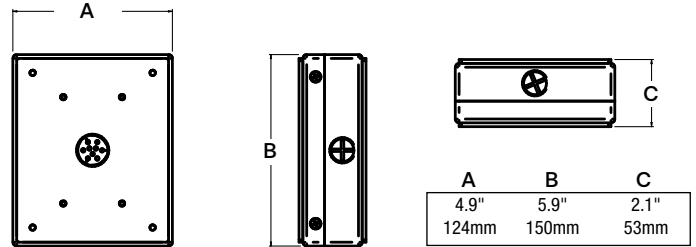

### Back Box Accessory

## CONTROLS FUNCTIONALITY

### OUTDOOR LIGHTING CONTROLS OPTIONS




Control Option Ordering Logic & Description	Control Option Functionality										Control Option Components	
	Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height			
<b>NX Wireless</b> NXW NX Networked Wireless Radio Module NXR2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓	-		NXR2-H	
NXWS16F NX Networked Wireless Enabled Integral NXSP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	16ft		NXSP2-LMO	
NXWS40F NX Networked Wireless Enabled Integral NXSP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	40ft		NXSP2-HMO	
<b>LightGRID+</b> WIR LightGRID+ In-Fixture Module	✓	-	✓	-	-	✓	✓	Gateway	-		WIR	
<b>Independent</b> BTSO-12F Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	12ft		BTSMP-OMNI-O	
BTS-14F Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	14ft		BTSMP-LMO	
BTS-40F Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	40ft		BTSMP-HMO	

## DEFAULT SETTINGS

<b>NX Wireless</b>	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	15 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	0%
	Daylight Sensor	Disabled
	Bluetooth	Enabled
	2.4GHz Wireless Mesh	Off
	*Passcode Factory Passcode: HubbN3T!	Enabled

<b>Stand Alone</b>	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	8 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	0% (Off)
	Daylight Sensor	Disabled

## NX WIRELESS COVERAGE PATTERNS

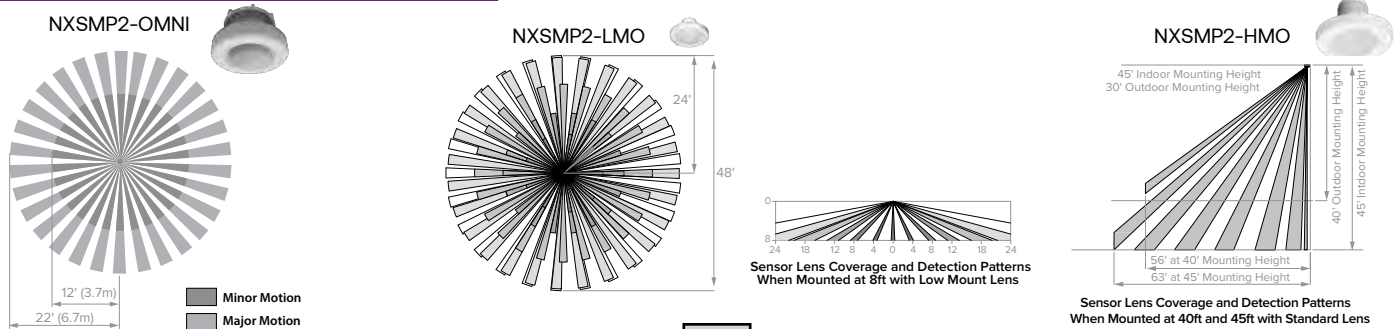

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## NX LIGHTING CONTROLS FREE APP

## CONTROLS TECH SUPPORT 800-888-8006 (7:00 AM - 7:00 PM)



The NX Lighting Controls App is free to use mobile application for programming both NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enable luminaires and program NX system settings.

Apple App: <https://apps.apple.com/us/app/nx-lighting-controls/id962112904>

Google Play: [https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en\\_US&gl=US](https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en_US&gl=US)



## LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF) PROJECTED LUMEN MAINTENANCE

Ambient Temperature	Lumen Multiplier
0°C / 32°F	1.03
10°C / 50°F	1.01
20°C / 68°F	1.00
25°C / 77°F	1.00
30°C / 86°F	0.99
40°C / 104°F	0.98
50°C / 122°F	0.97

Ambient Temp.	OPERATING HOURS		
	0	25,000	TM-21-22 60,000
25°C / 77°F	1.00	0.91	0.83
40°C / 104°F	0.99	0.90	0.82

Lumen maintenance values calculated per TM-21 using six times the LM-80 test time for the LED and in-situ thermal testing of the luminaire.

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

## MULTIPLIER

Micro Strike Lumen Multiplier			
CCT	70 CRI	80 CRI	90 CRI
2700K	-	0.841	-
3000K	0.977	0.861	0.647
3500K	-	0.900	-
4000K	1	0.926	0.699
5000K	1	0.937	0.791
Monochromatic Amber Multiplier			
Amber	0.710		

Strike Lumen Multiplier			
CCT	70 CRI	80 CRI	90 CRI
2700K	0.9	0.81	0.62
3000K	0.933	0.853	0.659
3500K	0.959	0.894	0.711
4000K	1	0.9	0.732
5000K	1	0.9	0.732
Monochromatic Amber Multiplier			
Amber	<a href="#">See Amber Spec Sheet</a>		

## PERFORMANCE DATA: MICROSTRIKE

Description	# of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)					
					Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	
VPW1	24L	10	6.6	2	1068	141	0	0	0	1068	141	0	0	0	989	131	0	0	0	
				3	1076	142	0	0	1	1076	142	0	0	1	997	131	0	0	1	
				4F	1052	139	0	0	1	1052	139	0	0	1	974	129	0	0	1	
				4W	1041	137	0	0	1	1041	137	0	0	1	964	127	0	0	1	
	24L	15	14	14	2	1993	129	1	0	0	1993	129	1	0	0	1845	119	1	0	0
					3	2008	130	1	0	1	2008	130	1	0	1	1859	120	0	0	1
					4F	1964	127	0	0	1	1964	127	0	0	1	1818	117	0	0	1
					4W	1943	125	1	0	1	1943	125	1	0	1	1799	116	0	0	1
	24L	25	23.0	23.0	2	3055	125	1	0	1	3055	125	1	0	1	2828	116	1	0	1
					3	3078	126	1	0	1	3078	126	1	0	1	2850	117	1	0	1
					4F	3010	123	1	0	1	3010	123	1	0	1	2787	114	1	0	1
					4W	2978	122	1	0	1	2978	122	1	0	1	2757	113	1	0	1

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## PERFORMANCE DATA: MICROSTRIKE CONT'D

Description	# of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
					Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
48L	15	13.1	2	2139	145	1	0	1	2139	145	1	0	1	1981	134	1	0	1	
			3	2163	146	1	0	1	2163	146	1	0	1	2003	135	1	0	1	
			4F	2097	143	0	0	1	2097	143	0	0	1	1942	132	0	0	1	
			4W	2101	143	1	0	1	2101	143	1	0	1	1946	132	0	0	1	
	20	20.5	2	2973	141	1	0	1	2973	141	1	0	1	2753	130	1	0	1	
			3	3007	142	1	0	1	3007	142	1	0	1	2784	132	1	0	1	
			4F	2915	138	1	0	1	2915	138	1	0	1	2699	128	1	0	1	
			4W	2921	138	1	0	1	2921	138	1	0	1	2705	128	1	0	1	
	30	28.8	2	4000	137	1	0	1	4000	137	1	0	1	3704	126	1	0	1	
			3	4045	138	1	0	1	4045	138	1	0	1	3745	128	1	0	1	
			4F	3922	134	1	0	1	3922	134	1	0	1	3631	124	1	0	1	
			4W	3930	134	1	0	2	3930	134	1	0	2	3638	124	1	0	1	
	35	37.3	2	4997	134	1	0	1	4997	134	1	0	1	4627	124	1	0	1	
			3	5053	135	1	0	2	5053	135	1	0	2	4679	125	1	0	1	
			4F	4899	131	1	0	1	4899	131	1	0	1	4536	122	1	0	1	
			4W	4909	132	1	0	2	4909	132	1	0	2	4545	122	1	0	2	
	45	45.9	2	5990	127	1	0	1	5990	127	1	0	1	5546	118	1	0	1	
			3	6057	128	1	0	2	6057	128	1	0	2	5608	119	1	0	2	
			4F	5872	124	1	0	2	5872	124	1	0	2	5437	115	1	0	1	
			4W	5884	125	1	0	2	5884	125	1	0	2	5448	115	1	0	2	
	VPW2	20	19.4	2	3485	161	1	0	1	3485	161	1	0	1	3200	147	1	0	1
				3	3516	162	1	0	1	3516	162	1	0	1	3229	149	1	0	1
				4F	3485	161	1	0	1	3485	161	1	0	1	3200	147	1	0	1
				4W	3535	163	1	0	1	3535	163	1	0	1	3246	150	1	0	1
25		26.7	2	4443	154	1	0	1	4443	154	1	0	1	4080	141	1	0	1	
			3	4483	155	1	0	1	4483	155	1	0	1	4117	142	1	0	1	
			4F	4443	154	1	0	1	4443	154	1	0	1	4080	141	1	0	1	
			4W	4507	156	1	0	1	4507	156	1	0	1	4139	143	1	0	1	
35		34.2	2	5438	147	1	0	1	5438	147	1	0	1	4994	135	1	0	1	
			3	5488	148	1	0	1	5488	148	1	0	1	5039	136	1	0	1	
			4F	5438	147	1	0	1	5438	147	1	0	1	4994	135	1	0	1	
			4W	5516	149	1	0	2	5516	149	1	0	2	5066	137	1	0	1	
45		41.7	2	6369	145	1	0	1	6369	145	1	0	1	5848	133	1	0	1	
			3	6427	146	2	0	2	6427	146	2	0	2	5901	134	1	0	1	
			4F	6369	145	1	0	1	6369	145	1	0	1	5848	133	1	0	1	
			4W	6460	147	1	0	2	6460	147	1	0	2	5933	135	1	0	2	
55		50.6	2	7209	137	2	0	2	7209	137	2	0	2	6620	126	1	0	1	
			3	7275	139	2	0	2	7275	139	2	0	2	6680	127	2	0	2	
			4F	7209	137	1	0	1	7209	137	1	0	1	6620	126	1	0	1	
			4W	7313	139	1	0	2	7313	139	1	0	2	6715	128	1	0	2	
65		58.3	2	7781	130	2	0	2	7781	130	2	0	2	7145	119	2	0	2	
			3	7852	131	2	0	2	7852	131	2	0	2	7210	120	2	0	2	
			4F	7781	130	2	0	1	7781	130	2	0	1	7145	119	1	0	1	
			4W	7893	132	1	0	2	7893	132	1	0	2	7248	121	1	0	2	
70	63.5	2	8367	128	2	0	2	8367	128	2	0	2	7683	117	2	0	2		
		3	8443	129	2	0	2	8443	129	2	0	2	7753	119	2	0	2		
		4F	8367	128	2	0	1	8367	128	2	0	1	7683	117	2	0	1		
		4W	8487	130	1	0	2	8487	130	1	0	2	7794	119	1	0	2		



# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## PERFORMANCE DATA: MICROSTRIKE CONT'D

Description	# of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
					Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
VPW3	160L	45	46.2	2	7623	148	1	0	2	7623	148	1	0	2	7000	136	1	0	1
				3	7626	148	2	0	2	7626	148	2	0	2	7003	136	2	0	2
				4F	7590	147	2	0	1	7590	147	2	0	1	6970	135	1	0	1
				4W	7715	150	1	0	2	7715	150	1	0	2	7084	138	1	0	2
		70	68.3	2	10322	139	2	0	2	10322	139	2	0	2	9478	128	2	0	2
				3	10326	140	2	0	2	10326	140	2	0	2	9482	128	2	0	2
				4F	10277	139	2	0	2	10277	139	2	0	2	9437	128	2	0	2
				4W	10446	141	2	0	2	10446	141	2	0	2	9592	130	1	0	2
		95	91	2	12929	132	2	0	2	12929	132	2	0	2	11872	121	2	0	2
				3	12934	132	3	0	3	12934	132	3	0	3	11877	121	3	0	3
				4F	12873	131	2	0	2	12873	131	2	0	2	11821	120	2	0	2
				4W	13084	133	2	0	3	13084	133	2	0	3	12015	122	2	0	3
		105	106.3	2	15055	138	2	0	2	15055	138	2	0	2	13825	127	2	0	2
				3	15062	138	3	0	3	15062	138	3	0	3	13831	127	3	0	3
				4F	14991	138	2	0	2	14991	138	2	0	2	13766	127	2	0	2
				4W	15236	140	2	0	3	15236	140	2	0	3	13991	129	2	0	3
		135	134.8	2	17533	127	3	0	3	17533	127	3	0	3	16100	116	3	0	3
				3	17541	127	3	0	3	17541	127	3	0	3	16107	116	3	0	3
				4F	17457	126	2	0	2	17457	126	2	0	2	16031	116	2	0	2
				4W	17744	128	2	0	4	17744	128	2	0	4	16294	118	2	0	3
		155	158.3	2	20066	123	3	0	3	20066	123	3	0	3	18426	113	3	0	3
				3	20075	123	3	0	3	20075	123	3	0	3	18434	113	3	0	3
				4F	19980	123	3	0	3	19980	123	3	0	3	18347	113	2	0	2
				4W	20307	125	2	0	4	20307	125	2	0	4	18648	115	2	0	4

## PERFORMANCE DATA: STRIKE

Description	# of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
					Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
VPW2	18L	25	22.6	2	3314	147	1	0	1	3298	146	1	0	G1	3171	140	1	0	1
				3	3356	148	1	0	1	3340	148	1	0	G1	3212	142	1	0	1
				4F	3367	149	0	0	1	3351	148	0	0	G1	3222	143	0	0	1
				4W	3361	149	1	0	2	3345	148	1	0	G2	3216	142	1	0	2
		30	31.3	2	4124	132	1	0	1	4104	131	1	0	G1	3946	126	1	0	1
				3	4176	133	1	0	2	4156	133	1	0	G2	3996	128	1	0	1
				4F	4189	134	1	0	1	4169	133	1	0	G1	4009	128	1	0	1
				4W	4182	134	1	0	2	4162	133	1	0	G2	4002	128	1	0	2
		39	38.8	2	4894	126	1	0	1	4870	126	1	0	G1	4683	121	1	0	1
				3	4956	128	1	0	2	4932	127	1	0	G2	4742	122	1	0	2
				4F	4972	128	1	0	2	4948	128	1	0	G2	4758	123	1	0	2
				4W	4963	128	1	0	2	4939	127	1	0	G2	4749	122	1	0	2
		50	52.6	2	6325	120	1	0	1	6295	120	1	0	G1	6052	115	1	0	1
				3	6405	122	1	0	2	6374	121	1	0	G2	6129	117	1	0	2
				4F	6426	122	1	0	2	6395	122	1	0	G2	6149	117	1	0	2
				4W	6414	122	1	0	3	6384	121	1	0	G3	6138	117	1	0	3
		60	60.4	2	6865	114	1	0	2	6832	113	1	0	G2	6569	109	1	0	2
				3	6952	115	1	0	2	6919	115	1	0	G2	6652	110	1	0	2
				4F	6974	115	1	0	2	6941	115	1	0	G2	6674	110	1	0	2
				4W	6962	115	1	0	3	6929	115	1	0	G3	6662	110	1	0	3

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## PERFORMANCE DATA: STRIKE CONT'D

Description	# of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
					Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
VPW3	36L	55	63.1	2	7284	135	1	0	2	7249	134	1	0	G2	6970	129	1	0	2
				3	7376	137	1	0	2	7341	136	1	0	G2	7058	131	1	0	2
				4F	7400	137	1	0	2	7364	137	1	0	G2	7081	131	1	0	2
				4W	7387	137	1	0	3	7351	136	1	0	G3	7069	131	1	0	3
		80	77.6	2	9788	126	2	0	2	9741	126	2	0	G2	9366	121	2	0	2
				3	9912	128	1	0	3	9864	127	1	0	G3	9485	122	1	0	3
				4F	9944	128	1	0	2	9896	128	1	0	G2	9516	123	1	0	2
				4W	9926	128	1	0	3	9879	127	1	0	G3	9499	122	1	0	3
		105	108.2	2	12650	128	2	0	2	12589	127	2	0	G2	12105	122	2	0	2
				3	12810	130	2	0	3	12748	129	2	0	G3	12258	124	2	0	3
				4F	12851	130	1	0	3	12790	129	1	0	G3	12298	124	1	0	3
				4W	12829	130	2	0	3	12767	129	2	0	G3	12276	124	2	0	3
	120	120.9	2	13730	114	2	0	2	13664	113	2	0	G2	13138	109	2	0	2	
			3	13904	115	2	0	3	13837	114	2	0	G3	13305	110	2	0	3	
			4F	13949	115	1	0	3	13882	115	1	0	G3	13348	110	1	0	3	
			4W	13924	115	2	0	4	13857	115	2	0	G4	13324	110	2	0	3	

## ELECTRICAL DATA: STRIKE

# OF LEDs	18L				
NOMINAL WATTAGE	25	30	39	50	60
SYSTEM POWER (W)	22.6	31.3	38.8	52.6	60.4
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	0.21	0.26	0.32	0.44	0.50
208	0.12	0.15	0.19	0.25	0.29
240	0.10	0.13	0.16	0.22	0.25
277	0.09	0.11	0.14	0.19	0.22
347	0.07	0.09	0.11	0.15	0.17
480	0.05	0.07	0.08	0.11	0.13

# OF LEDs	36L			
NOMINAL WATTAGE	55	80	100	120
SYSTEM POWER (W)	53.9	77.6	98.9	120.9
INPUT VOLTAGE (V)	CURRENT (Amps)			
120	0.45	0.65	0.82	1.01
208	0.26	0.37	0.48	0.58
240	0.22	0.32	0.41	0.50
277	0.19	0.28	0.36	0.44
347	0.16	0.22	0.29	0.35
480	0.11	0.16	0.21	0.25

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK

## ELECTRICAL DATA: MICROSTRIKE

# OF LEDS	24L		
NOMINAL WATTAGE	10	15	25
SYSTEM POWER (W)	6.6	14.0	23.0
INPUT VOLTAGE (V)	CURRENT (Amps)		
120	0.06	0.12	0.19
208	0.03	0.07	0.11
240	0.03	0.06	0.10
277	0.02	0.05	0.08
347	0.02	0.04	0.07
480	0.01	0.03	0.05

# OF LEDS	48L				
NOMINAL WATTAGE	15	20	30	35	45
SYSTEM POWER (W)	13.1	20.5	28.8	37.3	45.9
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	0.11	0.17	0.24	0.31	0.38
208	0.06	0.10	0.14	0.18	0.22
240	0.05	0.09	0.12	0.16	0.19
277	0.05	0.07	0.10	0.13	0.17
347	0.04	0.06	0.08	0.11	0.13
480	0.03	0.04	0.06	0.08	0.10

# OF LEDS	80L						
NOMINAL WATTAGE	20	25	35	45	55	65	70
SYSTEM POWER (W)	19.4	26.7	34.2	41.7	50.6	58.3	63.5
INPUT VOLTAGE (V)	CURRENT (Amps)						
120	0.16	0.22	0.29	0.35	0.42	0.49	0.53
208	0.10	0.13	0.18	0.22	0.27	0.28	0.31
240	0.08	0.12	0.15	0.19	0.24	0.24	0.26
277	0.07	0.10	0.13	0.17	0.21	0.21	0.23
347	0.06	0.08	0.11	0.13	0.16	0.17	0.18
480	0.04	0.06	0.08	0.10	0.12	0.12	0.13

# OF LEDS	160L					
NOMINAL WATTAGE	45	70	95	105	135	155
SYSTEM POWER (W)	46.2	68.3	91	106.3	134.8	158.3
INPUT VOLTAGE (V)	CURRENT (Amps)					
120	0.39	0.57	0.76	0.89	1.12	1.32
208	0.22	0.33	0.44	0.51	0.65	0.76
240	0.19	0.28	0.38	0.44	0.56	0.66
277	0.17	0.25	0.33	0.38	0.49	0.57
347	0.13	0.20	0.26	0.31	0.39	0.46
480	0.10	0.14	0.19	0.22	0.28	0.33


# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK


## PHOTOMETRY

Mounting Height: 10ft


Type 2




Type 3



Type 4F






Type 4W





## DIMENSIONS



VPW1






VPW2



VPW2 with Battery Back Box

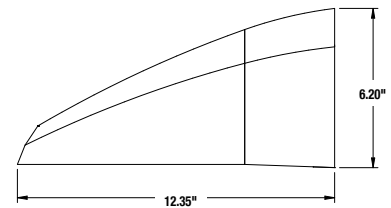

VPW3

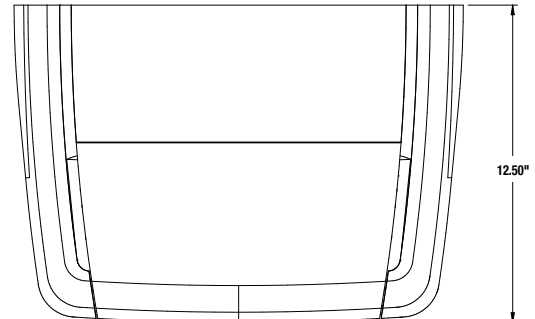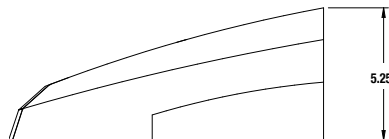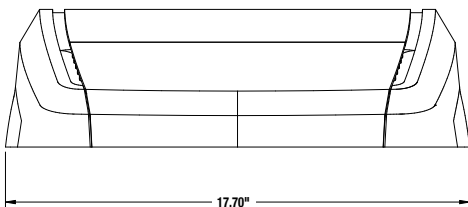

# VIPER Wall

VPW1/VPW2/VPW3 LED WALLPACK


## BATTERY OPTIONS & HOUSING SIZES

SIZE	OPTICS	OPTION	BATTERY WATTAGE	FIXTURE WATTAGES	HOUSING
VPW1	NO BATTERY OFFERED				
VPW2	Micro Strike	E	10W	20W, 25W, 35W	Standard
	Micro Strike	E	10W	45W, 55W, 65W, 70W	Not offered
	Micro Strike	EH	13W	20W, 25W, 35W, 45W, 55W, 65W, 70W	Housing with Backbox
	Strike	E	10W	15W, 20W, 25W, 35W, 39W	Standard
	Strike	E	10W	50W, 60W	Not offered
	Strike	EH	13W	15W, 20W, 25W, 30W, 39W, 50W, 60W	Housing with Backbox
VPW3	Micro Strike	E	10W	Not offered	
	Micro Strike	EH	13W	45W, 70W, 95W	Standard
	Micro Strike	EH	13W	105W, 135W, 155W	Not offered
	Strike	E	10W	Not offered	
	Strike	EH	13W	55W, 80W, 100W	Standard
	Strike	EH	13W	120W	Not offered


## PHOTOMETRY - BATTERY

Mounting Height: 12ft  
 Scale: 10ft

18L BATTERY PHOTOMETRY

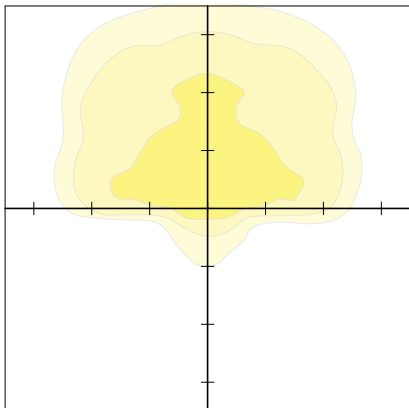

80L BATTERY PHOTOMETRY

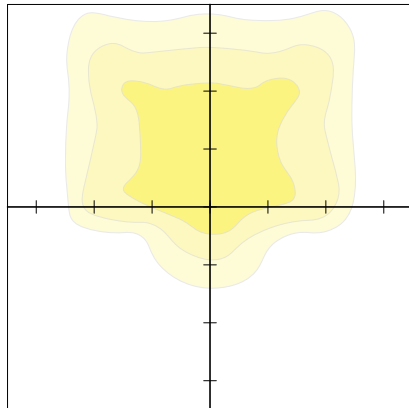

# SSS-B Series Poles

SQUARE STRAIGHT STEEL

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Item # 2.







## SPECIFICATIONS

### CONSTRUCTION

- Shaft: One-piece straight steel with square cross section, flat sides and minimum 0.23" radius on all corners; Minimum yield of 46,000 psi (ASTM-A500, Grade B); Longitudinal weld seam to appear flush with shaft side wall; Steel base plate with axial bolt circle slots welded flush to pole shaft having minimum yield of 36,000 psi (ASTM A36)
- Base cover: Two-piece square aluminum base cover included standard
- Pole cap: Pole shaft supplied with removable cover when applicable; Tenon and post-top configurations also available
- Hand hole: Rectangular 3x5 steel hand hole frame (2.38" x 4.38" opening); Mounting provisions for grounding lug located behind gasketed cover
- Anchor bolts: Four galvanized anchor bolts provided per pole with minimum yield of 55,000 psi (ASTM F1554). Galvanized hardware with two washers and two nuts per bolt for leveling
  - Anchor bolt part numbers: 3/4 x 30 x 3 — TAB-30-M38  
1 x 36 x 4 — TAB-36-M38
- Durable thermoset polyester powder coat paint finish with nominal 3.0 mil thickness
- Powder paint prime applied over "white metal" steel substrate cleaned via mechanical shot blast method
- Decorative finish coat available in multiple standard colors; Custom colors available; RAL number preferable

### INSTALLATION

- Lighting installations for side and top mounting of luminaires with effective projected area (EPA) not exceeding maximum allowable loading of the specified pole in its installed geographic location

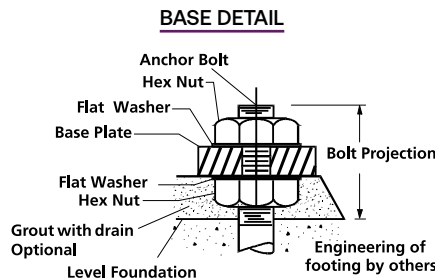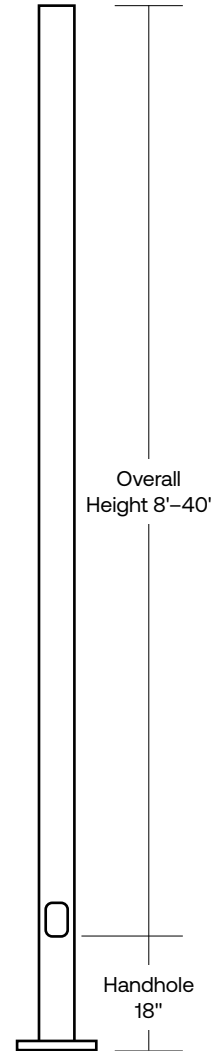

# SSS-B Series Poles

SQUARE STRAIGHT STEEL

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_

Item # 2.

## ORDERING INFORMATION

Example: SSS-B-25-40-A-2L-S2-DBT-UL

SSS-B Series	Height	Shaft	Thickness	Mounting	Drill Pattern	Finish	Options
SSS-B Square Straight Steel Pole Beacon	Reference page 3 Ordering matrix	Reference page 3 Ordering matrix	Reference page 3 Ordering matrix A - .125" Wall B - .188" Wall C - .250" Wall	1 Single arm mount 2 Two fixtures at 180° 2L Two fixtures at 90° 3T Three fixtures at 90° 4 Four fixtures at 90° TA Tenon (2.38" OD x 4" Tall) TB Tenon (2.88" OD x 4" Tall) TC Tenon (3.5" OD x 6" Tall) TR <sup>1</sup> Removable Tenon (2.375" x 4.25") OT Open Top (includes pole cap)	B1 Cruiser, "AM" arm B3 2 bolt (2-1/2" spacing), Viper "A" arm S2 2 bolt (3-1/2" spacing), Viper "AD" arm UDP Universal Drill Pattern	BLT Black Matte Textured BLS Black Gloss Smooth DBT Dark Bronze Matte Textured DBS Dark Bronze Gloss Smooth GTT Graphite Matte Textured LGT Light Grey Matte Textured LGS Light Grey Gloss Smooth PSS Platinum Silver Smooth WHT White Matte Textured WHS White Gloss Smooth VGT Verde Green Textured <b>Color Option</b> CC Custom Color <sup>2</sup>	GF1 <sup>3</sup> 20 Amp GFCI Receptacle and Cover EHH <sup>3</sup> Extra Handhole C05 <sup>3</sup> 5" Coupling C07 <sup>3</sup> .75" Coupling C20 <sup>3</sup> 2" Coupling MPB <sup>3</sup> Mid-pole Luminaire Bracket VM1 <sup>4</sup> Mode vibration dampener VM2 <sup>5</sup> 2nd mode vibration dampener LAB Less Anchor Bolts UL UL Certified


### Accessories (Order Separately)

- VM2S08 Field-installed 2nd mode vibration dampener - 8 ft
- VM2S12 Field-installed 2nd mode vibration dampener - 12 ft
- VM2S16 Field-installed 2nd mode vibration dampener - 16 ft
- VM2S20 Field-installed 2nd mode vibration dampener - 20 ft
- VM2S25 Field-installed 2nd mode vibration dampener - 25 ft

- 1 Removable tenon used in conjunction with side arm mounting. First specify desired arm configuration followed by the "TR" notation. Example: SSS-B-25-40-A-1-B1-TR-BBTT.
- 2 Custom colors available; RAL number preferable
- 3 Specify option location using logic found on page 3 (Option Orientation).
- 4 VM1 recommended on poles 20' and taller with EPA of less than 1.
- 5 There will be a weld witness mark on the side of the pole with the Factory installed VM2


## MOUNTING ORIENTATION

○ ← Denotes handhole location

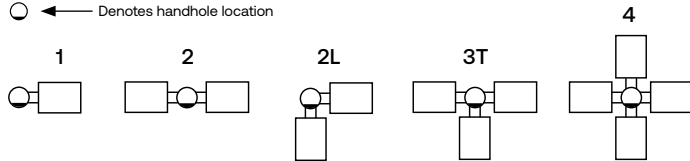

## DRILL PATTERNS

### UNIVERSAL DRILL PATTERN (UDP)

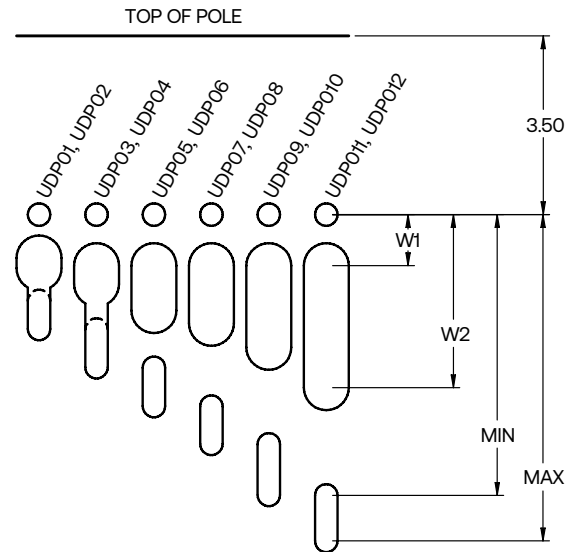

Two Bolt Mounting with Center Wireway						
Mounting Hardware	Universal Mounting Patterns					
3/8" or less	UDP01	UDP03	UDP05	UDP07	UDP09	UDP011
7/8" to 1/2"	UDP02	UDP04	UDP06	UDP08	UDP10	UDP12
"Min" Attachment Dimension	1.69	2.25	3.00	3.76	4.50	5.50
"Max" Attachment Dimension	2.24	2.99	3.75	4.49	5.49	6.00
W1 (Wireway min)	0.85	1.00	1.00	1.00	1.00	1.00
W2 (Wireway max)	1.05	1.36	1.88	2.13	2.60	3.00

# SSS-B Series Poles

SQUARE STRAIGHT STEEL

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_

Item # 2.

## ORDERING INFORMATION (CONTINUED)

CATALOG NUMBER	HEIGHT		NOMINAL SHAFT DIMENSIONS	WALL THICKNESS	BOLT CIRCLE (SUGGESTED)	BOLT CIRCLE (RANGE)	BASE PLATE SQUARE	ANCHOR BOLT SIZE	BOLT PROJECTION	POLE WEIGHT (LBS)
	FEET	METERS								
SSS-B-10-40-A-XX-XX	10	3.0	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	77
SSS-B-12-40-A-XX-XX	12	3.7	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	90
SSS-B-14-40-A-XX-XX	14	4.3	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	103
SSS-B-16-40-A-XX-XX	16	4.9	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	116
SSS-B-18-40-A-XX-XX	18	5.5	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	129
SSS-B-20-40-A-XX-XX	20	6.1	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	142
SSS-B-25-40-A-XX-XX	25	7.6	4" square	.0125"	9"	8" - 10"	9"	3/4" x 30" x 3"	3.5	175
SSS-B-14-40-B-XX-XX	14	4.3	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	152
SSS-B-16-40-B-XX-XX	16	4.9	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	171
SSS-B-18-40-B-XX-XX	18	5.5	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	190
SSS-B-20-40-B-XX-XX	20	6.1	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	209
SSS-B-25-40-B-XX-XX	25	7.6	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	257
SSS-B-30-40-B-XX-XX	30	9.1	4" square	.188"	11"	10" - 12"	10.50"	3/4" x 30" x 3"	3.5	304
SSS-B-16-50-B-XX-XX	16	4.9	5" square	.188"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	219
SSS-B-18-50-B-XX-XX	18	5.5	5" square	.188"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	243
SSS-B-20-50-B-XX-XX	20	6.1	5" square	.188"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	267
SSS-B-25-50-B-XX-XX	25	7.6	5" square	.188"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	327
SSS-B-30-50-B-XX-XX	30	9.1	5" square	.188"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	387
SSS-B-25-50-C-XX-XX	25	7.6	5" square	.25"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	427
SSS-B-30-50-C-XX-XX	30	9.1	5" square	.25"	11"	10.25" - 13.25"	11.50"	1" x 36" x 4"	4.5	507
SSS-B-20-60-B-XX-XX	20	6.1	6" square	.188"	12"	11.00" - 13.25"	12.25"	1" x 36" x 4"	4.5	329
SSS-B-25-60-B-XX-XX	25	7.6	6" square	.188"	12"	11.00" - 13.25"	12.25"	1" x 36" x 4"	4.5	404
SSS-B-30-60-B-XX-XX	30	9.1	6" square	.188"	12"	11.00" - 13.25"	12.25"	1" x 36" x 4"	4.5	479
SSS-B-35-60-B-XX-XX	35	10.7	6" square	.188"	12"	11.00" - 13.25"	12.25"	1" x 36" x 4"	4.5	554
SSS-B-40-60-B-XX-XX	40	12.2	6" square	.188"	12"	11.00" - 13.25"	12.25"	1" x 36" x 4"	4.5	629

- Notes:**
- Factory supplied template must be used when setting anchor bolts. Current will deny any claim for incorrect anchorage placement resulting from failure to use factory supplied template and anchor bolts.
  - For more information about pole vibration and vibration dampeners, please consult factory.
  - Unwrap poles immediately upon receipt to avoid condensation build up and possible corrosion.
  - There will be a weld witness mark on the side of the pole with the Factory installed VM2.

<p><b>EHH</b> Extra handhole</p> <p>Provision for Grounding</p>	<p><b>C05 / C07 / C20</b> Coupling</p> <p>2" -11.5 NPSC Threads 3/4" - 14 NPSC Threads 1/2" - 14 NPSC Threads</p>	<p><b>VM1</b> 1st mode vibration dampener</p> <p>Field Installed Pole Top dampener designed to reduce pole top deflection or sway. VM1 is recommended for pole systems 25' and taller with a total EPA of 1.0 or less.</p>	<p><b>VM2<sup>1</sup></b> 2nd mode vibration dampener</p> <p>Factory installed, internal dampener designed to alter pole resonance to reduce movement and material fatigue caused by 2nd mode vibration.</p>	<p><b>VM2SXX</b> Field-installed 2nd mode vibration dampener</p> <p>VM2S08 - 8' VM2S12 - 12' VM2S16 - 16' VM2S20 - 20' VM2S24 - 24'</p> <p>Field installed, internal dampener designed to alter pole resonance to reduce movement and material fatigue caused by 2nd mode vibration.</p>
<p><b>GFI</b> 20 Amp GCFI Receptacle &amp; Cover</p> <p>Square Steel Pole Standard hand hole frame Adapter plate Gasket 20 AMP GFCI Wet Locations In-use Cover</p>	<p><b>MPB</b> Mid Pole Bracket</p> <p>Square Steel Pole Attachment stub, 5" long, welded to pole 2" pipe tenon, 4.25" tall Arm, 3" Sq. x 13.5" long (ships separately)</p>	<p><b>Option Orientation</b></p> <p>Follow the logic below when ordering location specific options. For each option, include its orientation (in degrees) and its height (in feet).</p> <p><b>Example:</b> Option C05 should be ordered as: SSS-B-20-40-A-TA-DBT-C05-0-15 (5" coupling on the handhole/arm side of pole, 15' up from the pole base) 1' spacing required between option. Consult factory for other configurations.</p> <p>90° 180° 270° HAND HOLE 0' Height of option in feet</p>		



# SSS-B Series Poles


SQUARE STRAIGHT STEEL

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_

Item # 2.

## WIND MAPS


ASCE7-05 WIND MAP

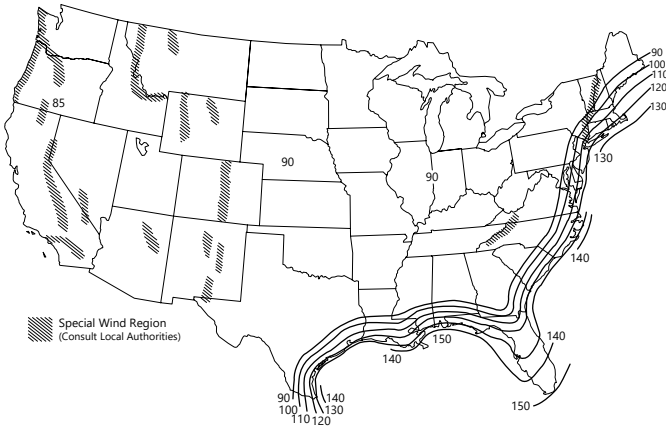

HAWAII – 105 mph  
 PUERTO RICO – 145 mph


\*Printed with permission from ASCE

FLORIDA REGION WIND MAP

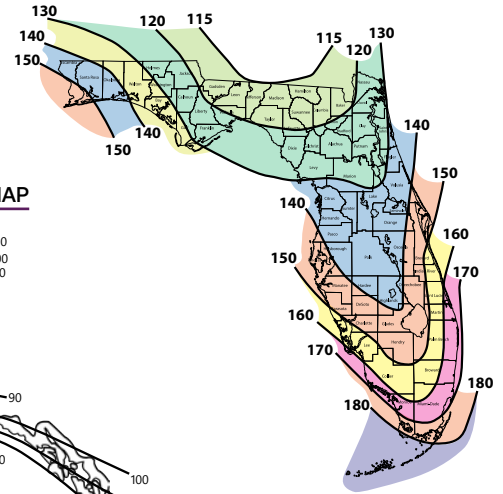

Florida region wind map above is based upon 3-second gust winds and the 2017 Florida Building Code.

ALASKA REGION WIND MAP

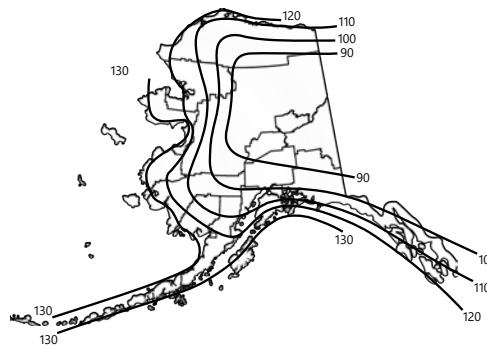

ASCE 7-05 wind map EPA Load Rating - 3 second gust wind speeds (Use for all locations except Florida)										
Catalog Number	85	90	100	105	110	120	130	140	145	150
SSS-B-10-40-A	25.0	25.0	25.0	22.8	20.6	17.0	14.2	11.9	11.0	10.1
SSS-B-12-40-A	25.0	25.0	20.0	18.0	16.1	13.2	10.8	8.9	8.1	7.4
SSS-B-14-40-A	23.1	20.4	16.1	14.3	12.8	10.2	8.2	6.6	5.9	5.3
SSS-B-16-40-A	19.0	16.7	13.0	11.5	10.1	7.9	6.2	4.7	4.1	3.6
SSS-B-18-40-A	15.6	13.6	10.0	9.0	7.8	5.9	4.4	3.1	2.6	2.1
SSS-B-20-40-A	12.7	10.9	7.9	6.9	5.9	4.2	2.8	1.7	1.3	0.9
SSS-B-25-40-A	7.3	5.9	3.8	2.9	2.1	0.8	NR	NR	NR	NR
SSS-B-14-40-B	25.0	25.0	23.3	20.8	18.6	15.1	12.3	10.2	9.2	8.4
SSS-B-16-40-B	25.0	24.9	19.4	17.3	15.4	12.3	9.9	8.0	7.2	6.4
SSS-B-18-40-B	24.0	20.8	16.1	14.2	12.5	9.8	7.7	6.1	5.3	4.7
SSS-B-20-40-B	20.2	17.5	13.2	11.6	10.1	7.7	5.9	4.4	3.8	3.2
SSS-B-25-40-B	12.8	11.0	7.9	6.7	5.5	3.7	2.3	1.2	0.7	NR
SSS-B-30-40-B	8.0	6.6	4.1	3.1	2.2	0.8	NR	NR	NR	NR
SSS-B-16-50-B	25.0	25.0	25.0	25.0	24.8	20.1	16.5	13.6	12.3	11.2
SSS-B-18-50-B	25.0	25.0	25.0	22.9	20.4	16.4	13.2	10.7	9.6	8.6
SSS-B-20-50-B	25.0	25.0	21.3	18.9	16.7	13.2	10.4	8.1	7.2	6.3
SSS-B-25-50-B	20.7	17.8	13.3	11.5	9.8	7.2	5.0	3.3	2.6	1.9
SSS-B-30-50-B	13.5	11.3	7.7	6.2	4.9	2.8	1.1	NR	NR	NR
SSS-B-25-50-C	25.0	25.0	19.4	17.1	15.1	11.7	9.0	6.9	6.0	5.1
SSS-B-30-50-C	20.1	17.3	12.7	10.9	9.3	6.6	4.5	2.8	2.1	1.4
SSS-B-20-60-B	25.0	25.0	25.0	25.0	25.0	20.2	16.1	12.9	11.5	10.3
SSS-B-25-60-B	25.0	25.0	20.6	18.0	15.6	11.8	8.7	6.2	5.2	4.2
SSS-B-30-60-B	21.4	18.1	12.9	10.7	8.8	5.7	3.3	1.3	NR	NR
SSS-B-35-60-B	14.0	11.3	6.9	5.2	3.6	1.0	NR	NR	NR	NR
SSS-B-40-60-B	8.1	5.8	2.2	nr	NR	NR	NR	NR	NR	NR

Florida Building Code 2017 EPA Load Rating - 3 second gust wind speeds (Use for Florida only)								
Catalog Number	115	120	130	140	150	160	170	180
SSS-B-10-40-A	25.0	25.0	25.0	25.0	21.4	18.4	15.9	13.9
SSS-B-12-40-A	25.0	25.0	23.6	19.8	16.7	14.2	12.1	10.4
SSS-B-14-40-A	25.0	23.1	19.0	15.7	13.1	10.9	9.1	7.6
SSS-B-16-40-A	20.8	18.7	15.2	12.3	10.1	8.2	6.7	5.4
SSS-B-18-40-A	16.8	15.0	11.9	9.4	7.5	5.9	4.5	3.4
SSS-B-20-40-A	13.6	11.9	9.2	7.1	5.3	3.9	2.7	1.7
SSS-B-25-40-A	7.4	6.2	4.1	2.5	1.1	NR	NR	NR
SSS-B-14-40-B	25.0	23.6	19.4	16.1	13.4	11.2	9.4	7.8
SSS-B-16-40-B	21.4	19.2	15.6	12.7	10.4	8.5	6.9	5.6
SSS-B-18-40-B	17.2	15.4	12.2	9.7	7.7	6.1	4.7	3.6
SSS-B-20-40-B	13.9	12.3	9.5	7.3	5.5	4.1	2.9	1.9
SSS-B-25-40-B	7.7	6.4	4.3	2.6	1.3	NR	NR	NR
SSS-B-30-40-B	3.2	2.1	NR	NR	NR	NR	NR	NR
SSS-B-16-50-B	25.0	25.0	25.0	25.0	25.0	21.4	18.2	15.5
SSS-B-18-50-B	25.0	25.0	25.0	24.4	20.4	17.0	14.2	11.9
SSS-B-20-50-B	25.0	25.0	24.4	19.9	16.3	13.4	11.0	8.9
SSS-B-25-50-B	21.8	19.3	15.0	11.5	8.8	6.5	4.7	3.1
SSS-B-30-50-B	13.7	11.7	8.2	5.5	3.3	1.5	NR	NR
SSS-B-25-50-C	21.8	19.3	15.0	11.5	8.8	6.5	4.7	3.1
SSS-B-30-50-C	13.7	11.7	8.2	5.5	3.3	1.5	NR	NR
SSS-B-20-60-B	25.0	25.0	25.0	21.9	17.8	14.5	11.7	9.4
SSS-B-25-60-B	23.8	20.9	16.1	12.3	9.2	6.6	4.5	2.8
SSS-B-30-60-B	14.6	12.3	8.4	5.3	2.8	0.8	NR	NR
SSS-B-35-60-B	7.5	5.6	2.4	NR	NR	NR	NR	NR
SSS-B-40-60-B	1.8	NR	NR	NR	NR	NR	NR	NR

# SSS-B Series Poles

SQUARE STRAIGHT STEEL

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_

TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_

CATALOG #: \_\_\_\_\_

Item # 2.

## NOTES

### Wind-speed Website disclaimer:

Current has no connection to the linked website and makes no representations as to its accuracy. While the information presented on this third party website provides a useful starting point for analyzing wind conditions, Current has not verified any of the information on this third party website and assumes no responsibility or liability for its accuracy. The material presented in the windspeed website should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. Current does not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the windspeed report provided by this website. Users of the information from this third party website assume all liability arising from such use. Use of the output of these referenced websites do not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the windspeed report. <http://windspeed.atcouncil.org>

- Allowable EPA, to determine max pole loading weight, multiply allowable EPA by 30 lbs.
- The tables for allowable pole EPA are based on the ASCE 7-05 Wind Map or the Florida Region Wind Map for the 2010 Florida Building Code. The Wind Maps are intended only as a general guide and cannot be used in conjunction with other maps. Always consult local authorities to determine maximum wind velocities, gusting and unique wind conditions for each specific application
- Allowable pole EPA for jobsite wind conditions must be equal to or greater than the total EPA for fixtures, arms, and accessories to be assembled to the pole. Responsibility lies with the specifier for correct pole selection. Installation of poles without luminaires or attachment of any unauthorized accessories to poles is discouraged and shall void the manufacturer's warranty
- Wind speeds and listed EPAs are for ground mounted installations. Poles mounted on structures (such as bridges and buildings) must consider vibration and coefficient of height factors beyond this general guide; Consult local and federal standards
- Wind Induced Vibration brought on by steady, unidirectional winds and other unpredictable aerodynamic forces are not included in wind velocity ratings. Consult Current Lighting's Pole Vibration Application Guide for environmental risk factors and design considerations.
- Extreme Wind Events like, Hurricanes, Typhoons, Cyclones, or Tornadoes may expose poles to flying debris, wind shear or other detrimental effects not included in wind velocity ratings

# VIPER Area/Site

VIPER LUMINAIRE

## FEATURES

- Low profile LED area/site luminaire with a variety of IES distributions for lighting applications such as auto dealership, retail, commercial, and campus parking lots
- Featuring two different optical technologies, Strike and Micro Strike Optics, which provide the best distribution patterns for retrofit or new construction
- Rated for high vibration applications including bridges and overpasses. All sizes are rated for 1.5G
- Control options including photo control, occupancy sensing, NX Lighting Controls™, LightGRID+ and 7-Pin with networked controls
- New customizable lumen output feature allows for the wattage and lumen output to be customized in the factory to meet whatever specification requirements may entail
- Field interchangeable mounting provides additional flexibility after the fixture has shipped



## CONTROL TECHNOLOGY



## SERVICE PROGRAMS



## SPECIFICATIONS

### CONSTRUCTION

- Die-cast housing with hidden vertical heat fins are optimal for heat dissipation while keeping a clean smooth outer surface
- Corrosion resistant, die-cast aluminum housing with 1000 hour powder coat paint finish
- External hardware is corrosion resistant

### OPTICS

- Micro Strike Optics (160, 320, 480, or 720 LED counts) maximize uniformity in applications and come standard with mid-power LEDs which evenly illuminate the entire luminous surface area to provide a low glare appearance. Catalog logic found on page 2
- Strike Optics (36, 72, 108, or 162 LED counts) provide best in class distributions and maximum pole spacing in new applications with high powered LEDs. Strike optics are held in place with a polycarbonate bezel to mimic the appearance of the Micro Strike Optics so both solutions can be combined on the same application. Catalog logic found on page 3
- Both optics maximize target zone illumination with minimal losses at the house-side, reducing light trespass issues. Additional backlight control shields and house side shields can be added for further reduction of illumination behind the pole
- One-piece silicone gasket ensures a weatherproof seal
- Zero up-light at 0 degrees of tilt
- Field rotatable optics

### INSTALLATION

- Mounting patterns for each arm can be found on page 11
- Optional universal mounting block for ease of installation during retrofit applications. Available as an option (ASQU) or accessory for square and round poles
- All mounting hardware included
- Knuckle arm fitter option available for 2-3/8" OD tenon
- For products with EPA less than 1 mounted to a pole greater than 20ft, a vibration damper is recommended


### ELECTRICAL

- Universal 120-277 VAC or 347-480 VAC input voltage, 50/60 Hz
- Ambient operating temperature -40°C to 40°C
- Drivers have greater than 90% power factor and less than 20% THD
- LED drivers have output power over-voltage, over-current protection and short circuit protection with auto recovery
- Field replaceable surge protection device provides 20kA protection meeting ANSI/ IEEE C62.41.2 Category C High and Surge Location Category C3; Automatically takes fixture off-line for protection when device is compromised
- Dual Driver option provides 2 drivers within luminaire but only one set of leads exiting the luminaire, where Dual Power Feed provides two drivers which can be wired independently as two sets of leads are extended from the luminaire. Both options cannot be combined

### CONTROLS

- Photo control, occupancy sensor programmable controls, and Zigbee wireless controls available for complete on/off and dimming control
- Please consult brand or sales representative when combining control and electrical options as some combinations may not operate as anticipated depending on your application
- 7-pin ANSI C136.41-2013 photocontrol receptacle option available for twist lock photocontrols or wireless control modules (control accessories sold separately)
- 0-10V Dimming Drivers are standard.
- NX Lighting Controls™ available with in fixture wireless control module, features dimming and occupancy sensor
- LightGRID+ available with in fixture wireless control module, features dimming and occupancy sensor. Also available in 7-pin configuration

## MICRO STRIKE | STRIKE OPTICS

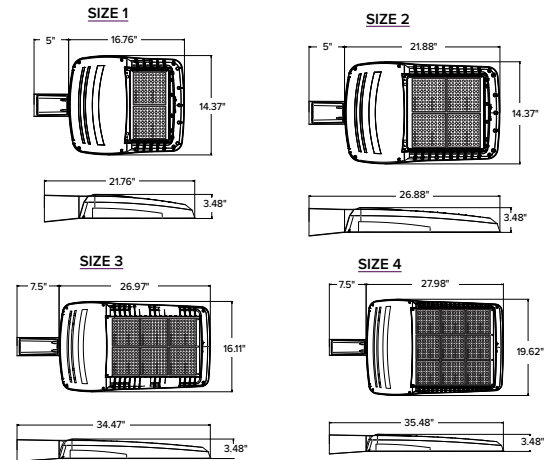

	EPA				Config
	VP1 (Size 1)	VP2 (Size 2)	VP3 (Size 3)	VP4 (Size 4)	
Single Fixture	0.454	0.555	0.655	0.698	
Two at 180	0.908	1.110	1.310	1.396	
Two at 90	0.583	0.711	0.857	0.948	
Three at 90	1.037	1.266	1.512	1.646	
Three at 120	0.943	1.155	1.392	1.680	
Four at 90	1.166	1.422	1.714	1.896	

### CERTIFICATIONS

- DLC® (DesignLights Consortium Qualified), with some Premium Qualified configurations. Not all product variations listed in this document are DLC® qualified. Refer to <http://www.designlights.org> for the most up-to-date list.
- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations and 40°C ambient temperatures
- 1.5 G rated for ANSI C136.31 high vibration applications
- Fixture is IP65 rated
- Meets IDA recommendations using 3K CCT configuration at 0 degrees of tilt
- This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) and Trade Agreements Act (FAR 52.225-11). See Buy America(n) Solutions (link to <https://www.currentlighting.com/resources/america-solutions>).
- FCC CFR Title 47 Part 15, Class A

### WARRANTY

- 5 year warranty

# VIPER Area/Site

VIPER LUMINAIRE

## MICROSTRIKE OPTICS – ORDERING GUIDE

Gray Shading = Service Program Limit of 15 luminaires

**QS10**

Example: VP-2-320L-145-3K7-2-R-UNV-A3-BLT

CATALOG # \_\_\_\_\_

VP Series	Optic Platform	Size	Light Engine	CCT/CRI	Distribution	Optic Rotation	Voltage
VP Viper Area	BLANK Micro Strike	1 Size 1	<b>160L-35</b> <sup>6</sup> 35W - 5,500 Lumens <b>160L-50</b> <sup>6</sup> 50W - 7,500 Lumens <b>160L-75</b> 75W - 10,000 Lumens <b>160L-100</b> 100W - 12,500 Lumens <b>160L-115</b> 115W - 15,000 Lumens <b>160L-135</b> 135W - 18,000 Lumens <b>160L-160</b> 160W - 21,000 Lumens <b>320L-145</b> 145W - 21,000 Lumens <b>320L-170</b> 170W - 24,000 Lumens <b>320L-185</b> 185W - 27,000 Lumens <b>320L-210</b> 210W - 30,000 Lumens <b>320L-235</b> 235W - 33,000 Lumens <b>320L-255</b> 255W - 36,000 Lumens <b>320L-315</b> <sup>6</sup> 315W - 40,000 Lumens <b>480L-285</b> 285W - 40,000 Lumens <b>480L-320</b> 320W - 44,000 Lumens <b>480L-340</b> 340W - 48,000 Lumens <b>480L-390</b> 390W - 52,000 Lumens <b>480L-425</b> 425W - 55,000 Lumens <b>480L-470</b> 470W - 60,000 Lumens <b>720L-435</b> 435W - 60,000 Lumens <b>720L-475</b> 475W - 65,000 Lumens <b>720L-515</b> 515W - 70,000 Lumens <b>720L-565</b> <sup>6</sup> 565W - 75,000 Lumens <b>720L-600</b> <sup>6</sup> 600W - 80,000 Lumens <b>CLO</b> Custom Lumen Output <sup>1</sup>	<b>AP</b> AP-Amber Phosphor Converted <b>27K8</b> 2700K, 80 CRI <b>3K7</b> 3000K, 70 CRI <b>3K8</b> 3000K, 80 CRI <b>35K8</b> 3500K, 80 CRI <b>3K9</b> 3000K, 90 CRI <b>4K7</b> 4000K, 70 CRI <b>4K8</b> 4000K, 80 CRI <b>4K9</b> 4000K, 90 CRI <b>5K7</b> 5000K, 70 CRI <b>5K8</b> 5000K, 80 CRI	<b>2</b> Type 2 <b>3</b> Type 3 <b>4F</b> Type 4 Forward <b>4W</b> Type 4 Wide <b>5QW</b> Type 5 Square Wide	<b>BLANK</b> No Rotation <b>L</b> Optic rotation left <b>R</b> Optic rotation right	<b>UNV</b> 120-277V <b>120</b> 120V <b>208</b> 208V <b>240</b> 240V <b>277</b> 277V <b>347</b> 347V <b>480</b> 480V
		2 Size 2					
		3 Size 3					
		4 Size 4					

Mounting	
<b>A</b>	Arm mount for square pole/flat surface (B3 Drill Pattern) (Does not include round pole adapter)
<b>A_</b>	Arm mount for round pole <sup>2</sup>
<b>ASQU</b>	Universal arm mount for square pole. Can be used with B3 or S2 Drill Pattern
<b>A_U</b>	Universal arm mount for round pole <sup>2</sup>
<b>AAU</b>	Adjustable arm for pole mounting (universal drill pattern)
<b>AA_U</b>	Adjustable arm mount for round pole <sup>2</sup>
<b>ADU</b>	Decorative upswept Arm (universal drill pattern)
<b>AD_U</b>	Decorative upswept arm mount for round pole <sup>2</sup>
<b>MAF</b>	Mast arm fitter for 2-3/8" OD horizontal arm
<b>K</b>	Knuckle
<b>T</b>	Trunnion
<b>WB</b>	Wall Bracket, horizontal tenon with MAF
<b>WM</b>	Wall mount bracket with decorative upswept arm
<b>WA</b>	Wall mount bracket with adjustable arm

Color	
<b>BLT</b>	Black Matte Textured
<b>BLS</b>	Black Gloss Smooth
<b>DBT</b>	Dark Bronze Matte Textured
<b>DBS</b>	Dark Bronze Gloss Smooth
<b>GTT</b>	Graphite Matte Textured
<b>LGS</b>	Light Grey Gloss Smooth
<b>LGT</b>	Light Grey Gloss Textured
<b>PSS</b>	Platinum Silver Smooth
<b>WHT</b>	White Matte Textured
<b>WHS</b>	White Gloss Smooth
<b>VGT</b>	Verde Green Textured
Color Option	
<b>CC</b>	Custom Color

Options	
<b>F</b>	Fusing
<b>2PF</b>	Dual Power Feed
<b>2DR</b>	Dual Driver
<b>TE</b>	Tooless Entry
<b>BC</b>	Backlight Control <sup>8</sup>
<b>TB</b>	Terminal Block
<b>LS</b>	Lumen Switch

Network Control Options	
<b>NXWS-16F</b>	NX Networked Wireless Enabled Integral NXSM2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>13,4</sup>
<b>NXWS-40F</b>	NX Networked Wireless Enabled Integral NXSM2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>13,4</sup>
<b>NXW</b>	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor <sup>3,4</sup>
<b>WIR</b>	LightGRID+ In-Fixture Module <sup>3,4</sup>
<b>WIRSC-14F</b>	LightGRID+ Module and Occupancy Sensor 14ft Mounting height <sup>3,4</sup>
<b>WIRSC-40F</b>	LightGRID+ Module and Occupancy Sensor 40ft Mounting height <sup>3,4</sup>
Stand Alone Sensors	
<b>BTS-14F</b>	Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens
<b>BTS-40F</b>	Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens
<b>BTSO-12F</b>	Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens
<b>7PR</b>	7-Pin Receptacle <sup>4</sup>
<b>7PR-SC</b>	7-Pin Receptacle with shorting cap <sup>4</sup>
<b>7PR-TL</b>	7-Pin PCR with NEMA photocontrol <sup>4</sup>
<b>3PR</b>	3-Pin Receptacle <sup>4</sup>
<b>3PR-SC</b>	3-Pin receptacle with shorting cap <sup>4</sup>
<b>3PR-TL</b>	3-Pin PCR with NEMA photocontrol <sup>4</sup>
Programmed Controls	
<b>SCP_F</b>	Sensor Control Programmable, 8F or 40F <sup>9</sup>
<b>ADD</b>	AutoDim Timer Based Dimming <sup>10</sup>
<b>ADT</b>	AutoDim Time of Day Dimming <sup>10</sup>

1 – Items with a grey background can be done as a custom order. Contact brand representative for more information  
 2 – Replace “\_” with “3” for 3.5”-4.13” OD pole, “4” for 4.18”-5.25” OD pole, “5” for 5.5”-6.5” OD pole  
 3 – Networked Controls cannot be combined with other control options  
 4 – Not available with 2PF option  
 5 – Not available with Dual Driver option

6 – Some voltage restrictions may apply when combined with controls  
 7 – Not available with 480V  
 8 – BC not available on 4F and type 5 distributions  
 9 – At least one SCPREMOTE required to program SCP motion sensor. Must select 8ft or 40ft.  
 10 - Please refer to page 8 for AutoDim ordering guide

# VIPER Area/Site

VIPER LUMINAIRE

## STRIKE OPTIC – ORDERING GUIDE

**Example:** VP-ST-1-36L-39-3K7-2-UNV-A-BLT

CATALOG #								
VP	Series	Optic Platform	Size	Light Engine	CCT/CRI	Distribution	Optic Rotation	Voltage
VP	Viper Area	ST Strike Optics	1 Size 1	<b>36L-39</b> <sup>8</sup> 39W - 5,500 Lumens <b>36L-55</b> <sup>8</sup> 55W - 7,500 Lumens <b>36L-85</b> 85W - 10,000 Lumens <b>36L-105</b> 105W - 12,500 Lumens <b>36L-120</b> 120W - 15,000 Lumens	<b>27K8</b> 2700K, 80 CRI <b>3K7</b> 3000K, 70 CRI <b>3K8</b> 3000K, 80 CRI <b>3K9</b> 3000K, 90 CRI <b>35K8</b> 3500K, 80 CRI	<b>FR</b> Auto Front Row <b>2</b> Type 2 <b>3</b> Type 3 <b>4F</b> Type 4 Forward <b>4W</b> Type 4 Wide <b>5QN</b> Type 5 Square Narrow <b>5QW</b> Type 5 Square Wide <b>5QM</b> Type 5 Square Medium <b>5W</b> Type 5 Wide (Round) <b>5RW</b> Type 5 Rectangular <b>C</b> Corner Optic <b>TC</b> Tennis Court Optic	<b>BLANK</b> <b>No Rotation</b> <b>L</b> Optic rotation left <b>R</b> Optic rotation right	<b>UNV</b> 120-277V <b>120</b> 120V <b>208</b> 208V <b>240</b> 240V <b>277</b> 277V <b>347</b> 347V <b>480</b> 480V
			2 Size 2	<b>72L-115</b> 115W - 15,000 Lumens <b>72L-145</b> 145W - 18,000 Lumens <b>72L-180</b> 180W - 21,000 Lumens <b>72L-210</b> 210W - 24,000 Lumens <b>72L-240</b> 240W - 27,000 Lumens	<b>4K7</b> 4000K, 70 CRI <b>4K8</b> 4000K, 80 CRI <b>4K9</b> 4000K, 90 CRI <b>5K7</b> 5000K, 70 CRI <b>5K8</b> 5000K, 80 CRI			
			3 Size 3	<b>108L-215</b> <sup>8</sup> 215W - 27,000 Lumens <b>108L-250</b> 250W - 30,000 Lumens <b>108L-280</b> 280W - 33,000 Lumens <b>108L-325</b> 325W - 36,000 Lumens <b>108L-365</b> 365W - 40,000 Lumens				
			4 Size 4	<b>162L-320</b> 320W - 40,000 Lumens <b>162L-365</b> <sup>10</sup> 365W - 44,000 Lumens <b>162L-405</b> 405W - 48,000 Lumens <b>162L-445</b> 445W - 52,000 Lumens <b>162L-485</b> 485W - 55,000 Lumens <b>162L-545</b> <sup>8</sup> 545W - 60,000 Lumens <b>CLO</b> Custom Lumen Output <sup>1</sup>				

Mounting	Color	Options	Network Control Options
<b>A</b> Arm mount for square pole/flat surface <b>A_</b> Arm mount for round pole <sup>3</sup> <b>ASQU</b> Universal arm mount for square pole <b>A_U</b> Universal arm mount for round pole <sup>3</sup> <b>AAU</b> Adjustable arm for pole mounting (universal drill pattern) <b>AA_U</b> Adjustable arm mount for round pole <sup>3</sup> <b>ADU</b> Decorative upswept Arm (universal drill pattern) <b>AD_U</b> Decorative upswept arm mount for round pole <sup>3</sup> <b>MAF</b> Mast arm fitter for 2-3/8" OD horizontal arm <b>K</b> Knuckle <b>T</b> Trunnion <b>WB</b> Wall Bracket, horizontal tenon with MAF <b>WM</b> Wall mount bracket with decorative upswept arm <b>WA</b> Wall mount bracket with adjustable arm	<b>BLT</b> Black Matte Textured <b>BLS</b> Black Gloss Smooth <b>DBT</b> Dark Bronze Matte Textured <b>DBS</b> Dark Bronze Gloss Smooth <b>GTT</b> Graphite Matte Textured <b>LGS</b> Light Grey Gloss Smooth <b>LGT</b> Light Grey Gloss Textured <b>PSS</b> Platinum Silver Smooth <b>WHT</b> White Matte Textured <b>WHS</b> White Gloss Smooth <b>VGT</b> Verde Green Textured <b>Color Option</b> <b>CC</b> Custom Color	<b>F</b> Fusing <b>E</b> Battery Backup <sup>1,2,7,8,9</sup> <b>2PF</b> Dual Power Feed <b>2DR</b> Dual Driver <b>TE</b> Toolless Entry <b>BC</b> Backlight Control <b>TB</b> Terminal Block <b>LS</b> Lumen Switch	<b>NXWS-16F</b> NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>1,4,5</sup> <b>NXWF-40F</b> NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming <sup>1,4,5</sup> <b>NXW</b> NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor <sup>4,5</sup> <b>WIR</b> LightGRID+ In-Fixture Module <sup>4,5</sup> <b>WIRSC-14F</b> LightGRID+ Module and Occupancy Sensor 14ft Mounting height <sup>4,5</sup> <b>WIRSC-40F</b> LightGRID+ Module and Occupancy Sensor 40ft Mounting height <sup>4,5</sup> <b>Stand Alone Sensors</b> <b>BTS-14F</b> Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens <b>BTS-40F</b> Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming® Photocell and 360° Lens <b>BTSO-12F</b> Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens <b>7PR</b> 7-Pin Receptacle <sup>4</sup> <b>7PR-SC</b> 7-Pin Receptacle with shorting cap <sup>4</sup> <b>7PR-TL</b> 7-Pin PCR with NEMA photocontrol <sup>4</sup> <b>3PR</b> 3-Pin Receptacle <sup>4</sup> <b>3PR-SC</b> 3-Pin receptacle with shorting cap <sup>4</sup> <b>3PR-TL</b> 3-Pin PCR with NEMA photocontrol <sup>4</sup> <b>Programmed Controls</b> <b>SCP_F</b> Sensor Control Programmable, 8F or 40F <sup>11</sup> <b>ADD</b> AutoDim Timer Based Dimming <sup>12</sup> <b>ADT</b> AutoDim Time of Day Dimming <sup>12</sup>

1 – Items with a grey background can be done as a custom order. Contact brand representative for more information

2 – Battery temperature rating -20C to 55C

3 – Replace “\_” with “3” for 3.5”-4.13” OD pole, “4” for 4.18”-5.25” OD pole, “5” for 5.5”-6.5” OD pole

4 – Networked Controls cannot be combined with other control options

5 – Not available with 2PF option

6 – Not available with 480V

7 – Not available with 347 or 480V

8 – Not available with Dual Driver option

9 – Only available in Size 1 housing, up to 105 Watts

10 – Some voltage restrictions may apply when combined with controls

11 – At least one SCPREMOTE required to program SCP motion sensor. Must select 8ft or 40ft.

12 – Please refer to page 8 for AutoDim ordering guide

# VIPER Area/Site

VIPER LUMINAIRE

## ORDERING GUIDE (CONT'D)

CATALOG # \_\_\_\_\_

Accessory Type	Size	Option	Color
<b>SHD</b> Shield	1 Size 1	<b>HSS-90-B</b> House Side Shield 90° Back	<b>BLS</b> Black Gloss Smooth
	2 Size 2	<b>HSS-90-F</b> House Side Shield 90° Front	<b>BLT</b> Black Matte Textured
	3 Size 3	<b>HSS-90-S</b> House Side Shield 90° Side	<b>DBS</b> Dark Bronze Gloss Smooth
	4 Size 4	<b>HSS-270-BSS</b> House Side Shield 270° Back/Side/Side	<b>DBT</b> Dark Bronze Matte Textured
		<b>HSS-270-FSS</b> House Side Shield 270° Front/Side/Side	<b>GTT</b> Graphite Matte Textured
		<b>HSS-270-FSB</b> House Side Shield 270° Front/Side/Back	<b>LGS</b> Light Gray Gloss Smooth
		<b>HSS-360</b> House Side Shield 360°	<b>PSS</b> Platinum Silver Smooth
		<b>BC</b> Back Light Control	<b>WHS</b> White Gloss Smooth
		<b>A</b> Arm Mount for square pole/flat surface	<b>WHT</b> White Matte Textured
		<b>ASQU</b> Universal Arm Mount for square pole	<b>VGT</b> Green Landscape Decorative
	<b>AAU</b> Adjustable Arm for pole mounting	<b>LEG</b> Legacy Colors	
	<b>ADU</b> Decorative upswept Arm	<b>Color Option</b>	
	<b>RPA</b> Round Pole Adapter	<b>CC</b> Custom Color	
	<b>MAF</b> Mast Arm Fitter for 2-3/8" OD horizontal arm		
	<b>K</b> Knuckle		
	<b>T</b> Trunnion		
	<b>WB</b> Wall Bracket (compatible with universal arm mounts)		
<b>MTG</b> Mounting			
<b>Accessory Type</b>		<b>Option</b>	
<b>MSC</b> Miscellaneous		<b>BIRD SPK</b> Bird Spike	

**Current Control Solutions — Accessories (Sold Separately)**
**NX Lighting Controls**
 **NXOFM-1R1D-UNV** On-fixture Module (7-pin), On / Off / Dim, Daylight Sensor with NX Radio and Bluetooth® Radio, 120–480VAC

**LightGRID+ Lighting Control**
 **WIR-RME-L** On-fixture Module (7-pin or 5-pin), On / Off / Dim, Daylight Sensor with LightGRID+ Radio, 110–480VAC


 **SCP-REMOTE** Remote Control for SCP/\_F option. Order at least one per project to program and control the occupancy sensor

For additional information related to these accessories please visit [currentlighting.com/beacon](http://currentlighting.com/beacon). Options provided for use with integrated sensor, please view specification sheet ordering information table for details.

# VIPER Area/Site

VIPER LUMINAIRE

## VIPER POLE EXPRESS COMBO – ORDERING GUIDE

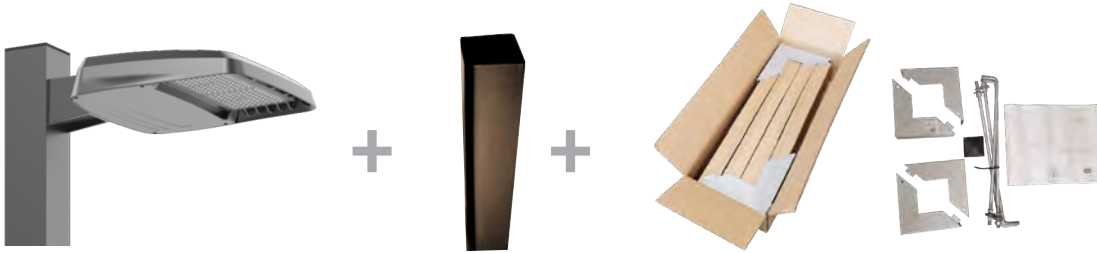

Catalog Number	Pole	Single or Double Head	Fixture	Lumens*	Wattage	Distribution	CCT/CRI	Mounting	Finish
VP-1-160-4K-3-LS-S20	20' Square Straight Steel	Single	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S20	20' Square Straight Steel	Single	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S25	25' Square Straight Steel	Single	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S25	25' Square Straight Steel	Single	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S20	20' Square Straight Steel	Single	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S20	20' Square Straight Steel	Single	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S25	25' Square Straight Steel	Single	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S25	25' Square Straight Steel	Single	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured

## VIPER POLE EXPRESS COMBO – STOCK LUMINAIRE SKUS

Catalog Number	Lumens	LPW	Distribution	Wattage	CCT/CRI	Voltage	Mounting	Finish
VP-1-160-4K-3-LS	19584	123.9	3	158W	4000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-4K-4F-LS	19426	122.9	4F	158W	4000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-5K-3-LS	19499	123.4	3	158W	5000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-5K-4F-LS	19186	121.4	4F	158W	5000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured

## VIPER POLE EXPRESS COMBO – ACCESSORIES











Catalog Number	Description
VM14DB	Vibration Dampener, mounts to top of pole for reduced vibration



# VIPER Area/Site

VIPER LUMINAIRE

## OUTDOOR LIGHTING CONTROLS OPTIONS    CONTROLS FUNCTIONALITY    LIGHT GRID+




Control Option Ordering Logic & Description	Control Option Functionality										Control Option Components
	Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height		
<b>NX Wireless</b> NXOFMIRID-UNV NX 7-Pin Twist-Lock® with NX Networked Wireless Radio, Integral Automatic Dimming Photocell, Integral Single Pole Relay with Dimming, and Bluetooth Programming	✓	✓	✓	Paired with external control	✓	✓	✓	✓	-		NXOFM-IRID-UV
NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓	-		NXRM2-H
NXWS12F NX Networked Wireless Enabled Integral NXSMP2-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	12ft		NXSMP2-OMNI-O
NXWS16F NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	16ft		NXSMP2-LMO
NXWS40F NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	40ft		NXSMP2-HMO
<b>LightGRID+</b> WIR LightGRID+ In-Fixture Module	✓	-	✓	-	-	✓	✓	Gateway	-		WIR
WIR-RME-L LightGRID+ On Fixture Module	✓	-	✓	-	-	✓	✓	Gateway	-		WIR-RME-L
WIRSC LightGRID+ Module and Occupancy Sensor	✓	✓	✓	✓	✓	✓	✓	Gateway	14ft - 40ft		BTMSP
<b>Independent</b> BTSO-12F Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	12ft		BTSMP-OMNI-O
BTS-14F Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	14ft		BTSMP-LMO
BTS-40F Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	40ft		BTSMP-HMO

### DEFAULT SETTINGS

<b>NX Wireless</b>	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	15 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	0%
	Daylight Sensor	Disabled
	Bluetooth	Enabled
	2.4GHz Wireless Mesh	On
	*Passcode Factory Passcode: HubbN3T!*	Enabled

<b>Stand Alone</b>	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	8 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	50%
	Daylight Sensor	Disabled

### NX WIRELESS COVERAGE PATTERNS

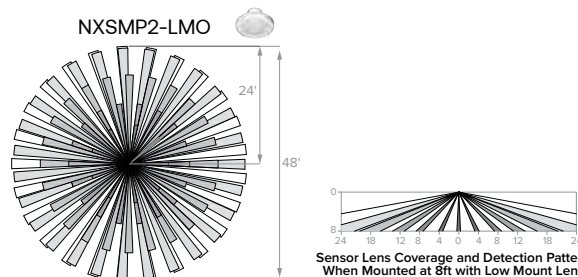



# VIPER Area/Site

VIPER LUMINAIRE

## NX LIGHTING CONTROLS FREE APP

## CONTROLS TECH SUPPORT 800-888-8006 (7:00 AM - 7:00 PM)



The NX Lighting Controls App is free to use mobile application for programming both NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enable luminaires and program NX system settings.

Apple App: <https://apps.apple.com/us/app/nx-lighting-controls/id962112904>

Google Play: [https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en\\_US&q=US](https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en_US&q=US)






Apple App




Google Play

## OUTDOOR LIGHTING CONTROLS OPTIONS    CONTROLS FUNCTIONALITY

Control Option Ordering Logic & Description	Control Option Functionality										Control Option Components
	Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height		
SCP_F    Sensor Control Programmable, 8F or 40F	-	-	-	✓	✓	✓	✓	-	8ft or 40ft		SCP_F
ADD    AutoDIM Timer Based Dimming	-	-	✓	-	-	-	✓	-	-		ADD
ADT    AutoDIM Time of Day Dimming	-	-	✓	-	-	-	✓	-	-		ADT
7PR    7-Pin Receptacle	-	-	Paired with external control	-	Paired with external control	-	Paired with external control	-	-		7PR
7PR-SC    7-Pin Receptacle with shorting cap	-	-	-	-	-	-	-	-	-		7PR-SC
3PR    3-Pin twist lock	-	-	-	-	-	-	Paired with external control	-	-		3PR
3PR-SC    3-Pin Receptacle with shorting cap	-	-	-	-	-	-	-	-	-		3PR-SC
3PR-TL    3-Pin with photocontrol	-	-	-	-	✓	-	✓	-	-		3PR-TL

## COVERAGE PATTERNS FOR SCP\_F

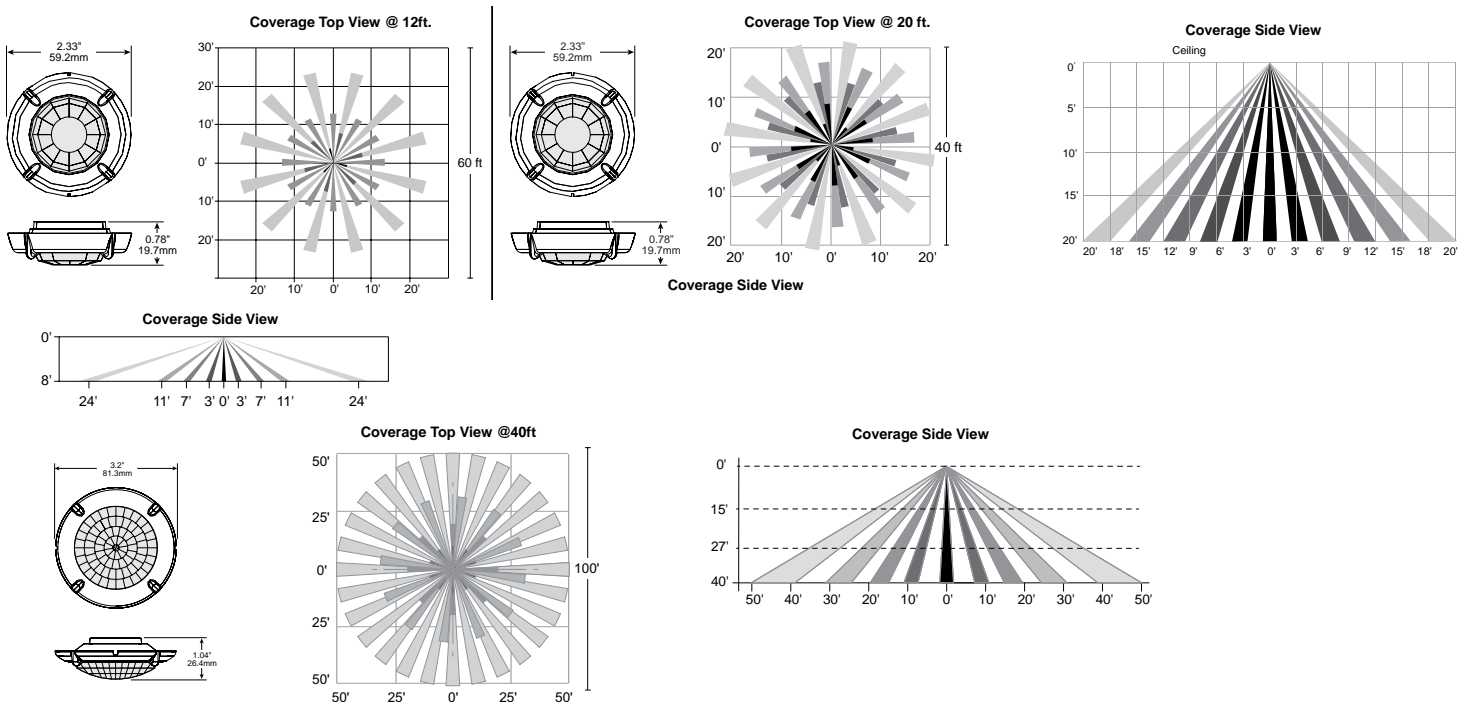

# VIPER Area/Site

VIPER LUMINAIRE

## PROGRAMMED CONTROLS

### ADD-AutoDim Timer Based Options

- Light delay options from 1-9 hours after the light is turned on to dim the light by 10-100%. To return the luminaire to its original light level there are dim return options from 1-9 hours after the light has been dimmed previously.

EX: ADD-6-5-R6

ADD Control Options	Configurations Choices	Example Choice Picked
Auto-Dim Options	1-9 Hours	6 - Delay 6 hours
Auto-Dim Brightness	10-100% Brightness	5 - Dim to 50% brightness
Auto-Dim Return	Delay 0-9 Hours	R6 - Return to full output after 6 hours

### ADT-AutoDim Time of Day Based Option

- Light delay options from 1AM-9PM after the light is turned on to dim the light by 10-100%. To return the luminaire to its original light level there are dim return options from 1AM-9PM after the light has been dimmed previously.

EX: ADT-6-5-R6

ADD Control Options	Configurations Choices	Example Choice Picked
Auto-Dim Options	12-3 AM and 6-11 PM	6 - Dim at 6PM
Auto-Dim Brightness	10-100% Brightness	5 - Dim to 50%
Auto-Dim Return	12-6 AM and 9-11P	R6 - Return to full output at 6AM

## ORDERING GUIDE

Auto Dim Code	Timer Base (ADD) Auto-Dim Options		Auto Dim Cod	Time of Day (ADT) Auto-Dim Options	Code	Auto-Dim Brightness	Code	Auto-Dim Return Options	Code	Auto-Dim Brightness
D1	Delay 1 hour	OR	T0	Delay Midnight	0	100% Brightness	R1	Delay 1 hour or 1 AM	0	100% Brightness
D2	Delay 2 hours		T1	Delay 1 AM	1	10% Brightness	R2	Delay 2 hours or 2 AM	1	10% Brightness
D3	Delay 3 hours		T2	Delay 2 AM	2	20% Brightness	R3	Delay 3 hours or 3 AM	2	20% Brightness
D4	Delay 4 hours		T3	Delay 3 AM	3	30% Brightness	R4	Delay 4 hours or 4 AM	3	30% Brightness
D5	Delay 5 hours		T4	Delay 10 PM	4	40% Brightness	R5	Delay 5 hours or 5 AM	4	40% Brightness
D6	Delay 6 hours		T5	Delay 11 PM	5	50% Brightness	R6	Delay 6 hours or 6 AM	5	50% Brightness
D7	Delay 7 hours		T6	Delay 6 PM	6	60% Brightness	R7	Delay 7 hours or 7 AM	6	60% Brightness
D8	Delay 8 hours		T7	Delay 7 PM	7	70% Brightness	R8	Delay 8 hours or 8 AM	7	70% Brightness
D9	Delay 9 hours		T8	Delay 8 PM	8	80% Brightness	R9	Delay 9 hours or 9 AM	8	80% Brightness
D0	Delay 0 hours		T9	Delay 9 PM	9	90% Brightness	R0	Delay 0 hours or 12 AM	9	90% Brightness

## DELIVERED LUMENS

For delivered lumens, please see Lumens Data PDF on [www.Currentlighting.com](http://www.Currentlighting.com)

## PROJECTED LUMEN MAINTENANCE

Ambient Temp.	0	25,000	*TM-21-11 36,000	50,000	100,000	Calculated L <sub>70</sub> (Hours)
25°C / 77°F	1.00	0.97	0.96	0.95	0.91	408,000
40°C / 104°F	0.99	0.96	0.95	0.94	0.89	356,000

## LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

Ambient Temperature		Lumen Multiplier	Micro Strike Lumen Multiplier				Strike Lumen Multiplier			
°C	°F		CCT	70 CRI	80 CRI	90 CRI	CCT	70 CRI	80 CRI	90 CRI
0°C	32°F	1.03	2700K	-	0.841	-	2700K	0.9	0.81	0.62
10°C	50°F	1.01	3000K	0.977	0.861	0.647	3000K	0.933	0.853	0.659
20°C	68°F	1.00	3500K	-	0.900	-	3500K	0.959	0.894	0.711
25°C	77°F	1.00	4000K	1	0.926	0.699	4000K	1	0.9	0.732
30°C	86°F	0.99	5000K	1	0.937	0.791	5000K	1	0.9	0.732
40°C	104°F	0.98	AP-Amber Phosphor Converted Multiplier				Monochromatic Amber Multiplier			
			Amber	0.710			Amber	See Amber Spec Sheet		

# VIPER Area/Site

VIPER LUMINAIRE

## ELECTRICAL DATA: MICRO STRIKE

# OF LEDS	160						
NOMINAL WATTAGE	35	50	75	100	115	135	160
SYSTEM POWER (W)	34.9	50.5	72.1	97.2	111.9	132.2	157.8
INPUT VOLTAGE (V)	CURRENT (Amps)						
120	0.29	0.42	0.63	0.83	0.96	1.13	1.33
208	0.17	0.24	0.36	0.48	0.55	0.65	0.77
240	0.15	0.21	0.31	0.42	0.48	0.56	0.67
277	0.13	0.18	0.27	0.36	0.42	0.49	0.58
347	0.10	0.14	0.22	0.29	0.33	0.39	0.46
480	0.07	0.10	0.16	0.21	0.24	0.28	0.33

# OF LEDS	320						
NOMINAL WATTAGE	145	170	185	210	235	255	315
SYSTEM POWER (W)	150	166.8	185.7	216.2	240.9	261.5	312
INPUT VOLTAGE (V)	CURRENT (Amps)						
120	1.21	1.42	1.54	1.75	1.96	2.13	2.63
208	0.70	0.82	0.89	1.01	1.13	1.23	1.51
240	0.60	0.71	0.77	0.88	0.98	1.06	1.31
277	0.52	0.61	0.67	0.76	0.85	0.92	1.14
347	0.42	0.49	0.53	0.61	0.68	0.73	0.91
480	0.30	0.35	0.39	0.44	0.49	0.53	0.66

# OF LEDS	480					
NOMINAL WATTAGE	285	320	340	390	425	470
SYSTEM POWER (W)	286.2	316.7	338.4	392.2	423.2	468
INPUT VOLTAGE (V)	CURRENT (Amps)					
120	2.38	2.67	2.83	3.25	3.54	3.92
208	1.37	1.54	1.63	1.88	2.04	2.26
240	1.19	1.33	1.42	1.63	1.77	1.96
277	1.03	1.16	1.23	1.41	1.53	1.70
347	0.82	0.92	0.98	1.12	1.22	1.35
480	0.59	0.67	0.71	0.81	0.89	0.98

# OF LEDS	720				
NOMINAL WATTAGE	435	475	515	565	600
SYSTEM POWER (W)	429.3	475	519.1	565.2	599.9
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	3.63	3.96	4.29	4.71	5.00
208	2.09	2.28	2.48	2.72	2.88
240	1.81	1.98	2.15	2.35	2.50
277	1.57	1.71	1.86	2.04	2.17
347	1.25	1.37	1.48	1.63	1.73
480	0.91	0.99	1.07	1.18	1.25

# VIPER Area/Site

VIPER LUMINAIRE

## ELECTRICAL DATA: STRIKE

# OF LEDS	36				
NOMINAL WATTAGE	39	55	85	105	120
SYSTEM POWER (W)	39.6	56.8	83.6	108.2	120.9
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	0.33	0.46	0.71	0.88	0.96
208	0.19	0.26	0.41	0.50	0.55
240	0.16	0.23	0.35	0.44	0.48
277	0.14	0.20	0.31	0.38	0.42
347	0.11	0.16	0.24	0.30	0.33
480	0.08	0.11	0.18	0.22	0.24

# OF LEDS	72				
NOMINAL WATTAGE	115	145	180	210	240
SYSTEM POWER (W)	113.7	143.2	179.4	210.2	241.7
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	1.00	1.21	1.50	1.75	1.79
208	0.58	0.70	0.87	1.01	1.03
240	0.50	0.60	0.75	0.88	0.90
277	0.43	0.52	0.65	0.76	0.78
347	0.35	0.42	0.52	0.61	0.62
480	0.25	0.30	0.38	0.44	0.45

# OF LEDS	108				
NOMINAL WATTAGE	215	250	280	325	365
SYSTEM POWER (W)	214.8	250.8	278.3	324.7	362.6
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	2.00	2.08	2.33	3.04	2.67
208	1.15	1.20	1.35	1.75	1.54
240	1.00	1.04	1.17	1.52	1.33
277	0.87	0.90	1.01	1.32	1.16
347	0.69	0.72	0.81	1.05	0.92
480	0.50	0.52	0.58	0.76	0.67

# OF LEDS	162					
NOMINAL WATTAGE	320	365	405	445	485	545
SYSTEM POWER (W)	322.1	362.6	403.6	445.1	487.1	543.9
INPUT VOLTAGE (V)	CURRENT (Amps)					
120	2.71	2.67	3.38	3.71	4.04	4.54
208	1.56	1.54	1.95	2.14	2.33	2.62
240	1.35	1.33	1.69	1.85	2.02	2.27
277	1.17	1.16	1.46	1.61	1.75	1.97
347	0.94	0.92	1.17	1.28	1.40	1.57
480	0.68	0.67	0.84	0.93	1.01	1.14


# VIPER Area/Site

VIPER LUMINAIRE


## MICRO STRIKE PHOTOMETRY

The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see website photometric test reports.


Type 2




Type 3




Type 4 Wide



Type 4F



Type 5QW




# VIPER Area/Site

VIPER LUMINAIRE


## OPTIC STRIKE PHOTOMETRY

The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see website photometric test reports.


Type FR – Front Row/Auto Optic




Type 2




Type 3




Type 4 Forward




Type 4 Wide




Type 5QM




Type 5RW (rectangular)




Type 5W (round wide)




Type TC




Type Corner



Type 5QW



Type 5QN




# VIPER Area/Site


VIPER LUMINAIRE

## DIMENSIONS


### SIZE 1

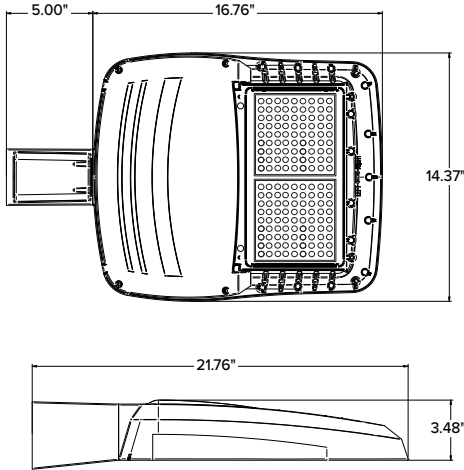


### SIZE 2

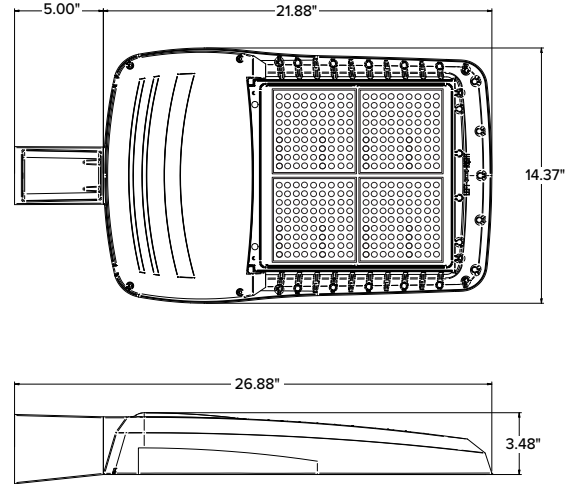

### SIZE 3

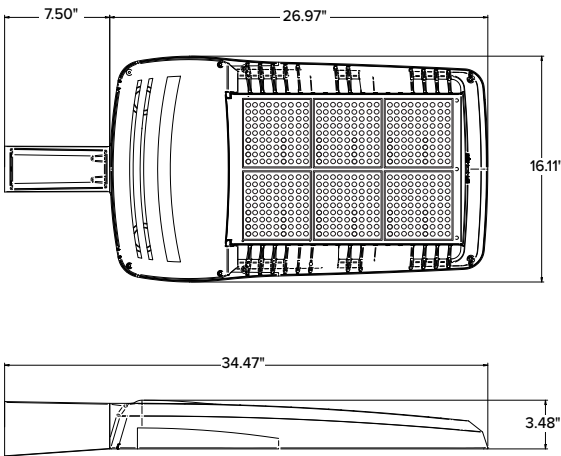

### SIZE 4

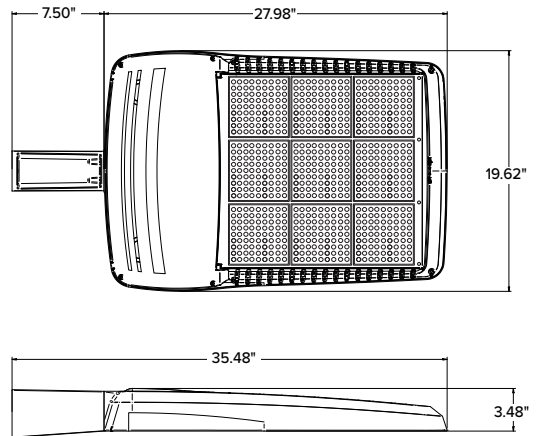

	EPA				Config.
	VP1 (Size 1)	VP2 (Size 2)	VP3 (Size 3)	VP4 (Size 4)	
Single Fixture	0.454	0.555	0.655	0.698	
Two at 180	0.908	1.110	1.310	1.396	
Two at 90	0.583	0.711	0.857	0.948	
Three at 90	1.037	1.266	1.512	1.646	
Three at 120	0.943	1.155	1.392	1.680	
Four at 90	1.166	1.422	1.714	1.896	

	Weight	
	lbs	kgs
VP1 (Size 1)	13.7	6.2
VP2 (Size 2)	16.0	7.26
VP3 (Size 3)	25.9	11.7
VP4 (Size 4)	30.8	13.9

# VIPER Area/Site




VIPER LUMINAIRE

## MOUNTING





### A-STRAIGHT ARM MOUNT

Fixture ships with integral arm for ease of installation. Compatible with Current Outdoor B3 drill pattern for ease of installation on square poles. For round poles add applicable suffix (2/3/4/5)

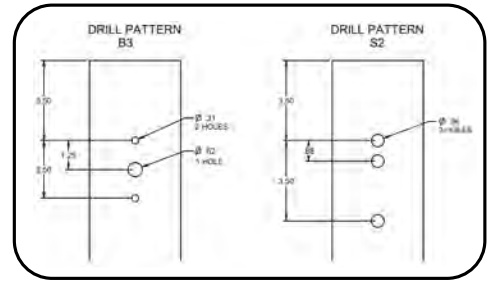



### ASQU-UNIVERSAL ARM MOUNT

Universal mounting block for ease of installation. Compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2. For round poles add applicable suffix (2/3/4/5)




### AAU-ADJUSTABLE ARM FOR POLE MOUNTING

Rotatable arm mounts directly to pole. Compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2 and B3. For round poles add applicable suffix (2/3/4/5). Rotatable in 5° aiming angle increments. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.

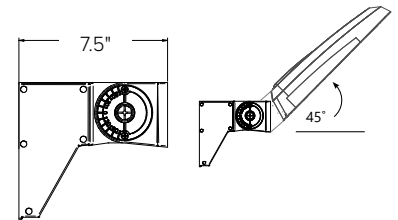



### ADU-DECORATIVE UPSWEPT ARM

Upswept Arm compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2. For round poles add applicable suffix (2/3/4/5).





### MAF-MAST ARM FITTER

Fits 2-3/8" OD horizontal tenons.





### K-KNUCKLE

Rotatable in 5-degree aiming angle increments, fits 2-3/8" tenons or pipes. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.




### T-TRUNNION

Trunnion for surface and crossarm mounting using (1) 3/4" or (2) 1/2" size through bolts. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.

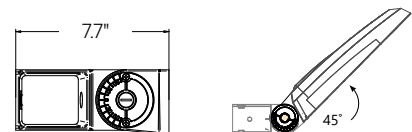

### WM-WALL MOUNT

Compatible with universal arm mount, adjustable arm mount, and decorative arm mount. The WA option uses the same wall bracket but replaces the decorative arm with an adjustable arm.





# VIPER Area/Site

VIPER LUMINAIRE


## ADDITIONAL INFORMATION (CONTINUED)

### HOUSE SIDE SHIELD FIELD INSTALL ACCESSORIES


HSS has a depth of 5" for all Viper sizes

Not to be used with Occupancy Sensors as the shield may block the light to the sensor.


VPR2x HSS-90-B-xx




VPR2x HSS-270-BSS-xx




VPR2x HSS-360-xx




VPR2x HSS-90-F-xx




VPR2x HSS-270-FSS-xx




VPR2x HSS-90-S-xx




VPR2x HSS-270-FSB-xx




VPR2x HSS-90-S-xx



VPR2x HSS-270-FSB-xx





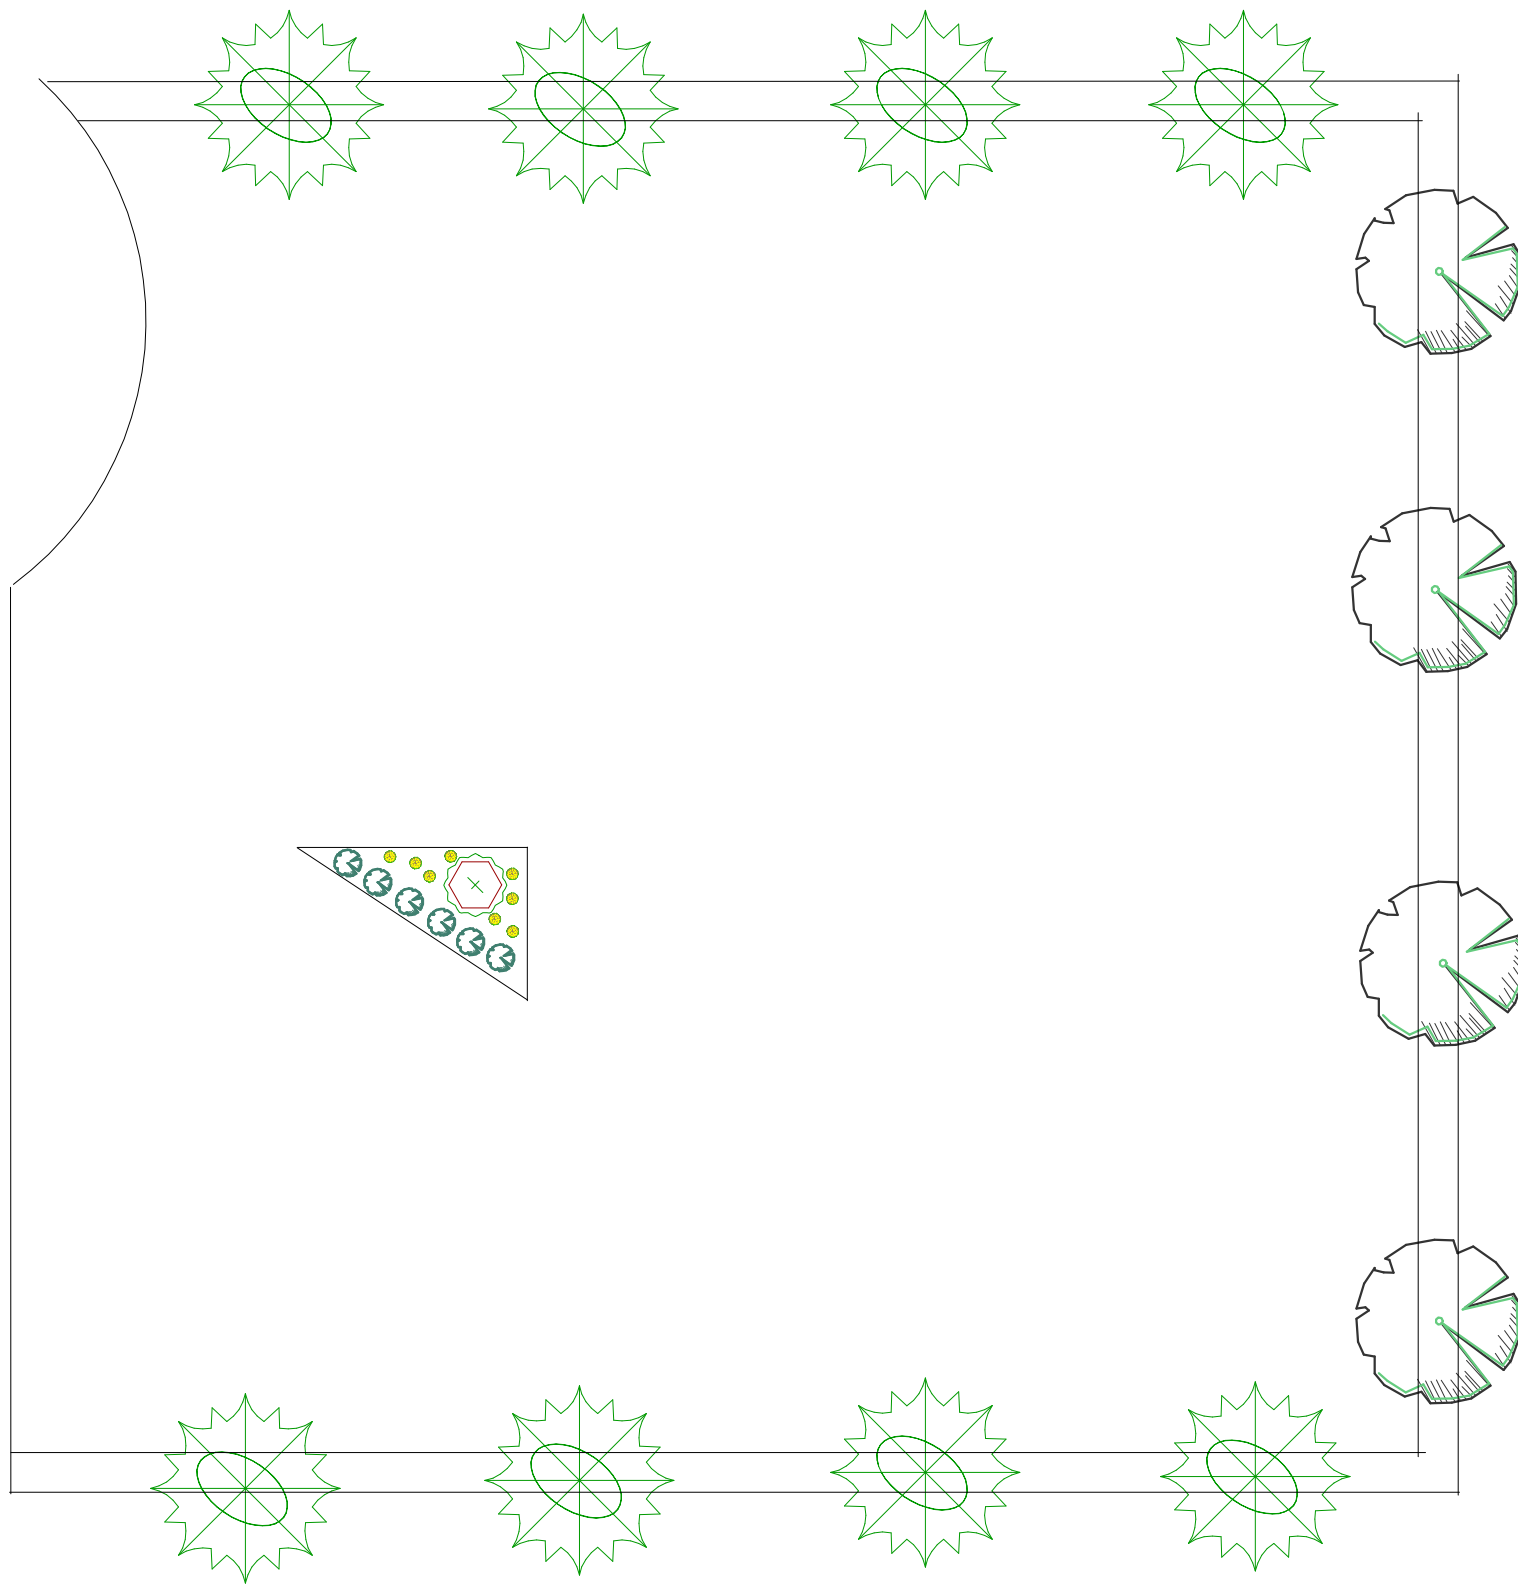

LEGEND		
	COMMON NAME	QTY
SHRUB, DECIDUOUS		
	POTENTILLA, GOLD DROP	10
SHRUB, EVERGREEN CONIFER		
	JUNIPER, BLUE CHIP	6
TREE, DECIDUOUS		
	ASH, AUTUMN PURPLE	4
	HONEY LOCUST SHADEMASTER	8
	MAPLE, HOTWINGS TATARIAN	1

Revision #:  
Date: 4/2/2025

Scale:  
1" = 50'

Landscape Plan: Cross Country Freight  
**Cross Country Freight**

Landscape Design by: Don Stoner  
**Stoner Lawn and Landscape**