



Historic Preservation Commission Special Meeting Agenda

Tuesday, September 16, 2025 at 10:30 AM

9103 E Frederick Ave.

www.youtube.com/@cityofmillwood

- 1. CALL TO ORDER & ROLL CALL**
- 2. APPROVAL OF SPECIAL MEETING AGENDA**
- 3. APPROVAL OF MINUTES**
 - a. [Motion to approve July 14, 2025 minutes as presented or with modifications.](#)
- 4. ACTION AND DISCUSSION ITEMS**
 - a. [Historic Millwood Resource Guide](#)
 - b. 100-year Property Recognition
 - c. [Millwood Trail Signage](#)
 - d. Local Register Assistance
 - e. 2026 Budget
- 5. COMMISSIONER COMMENTS**
- 6. SET NEXT MEETING**
 - a. Set Schedule for Special Meetings
- 7. ADJOURNMENT**



Historic Preservation Commission Regular Meeting Minutes

Monday, July 14, 2025 at 2:00 AM

9103 E Frederick Ave.

www.youtube.com/@cityofmillwood

1. CALL TO ORDER & ROLL CALL

Commissioner Major called the Historic Preservation Commission Meeting to order at 2:00 pm.

PRESENT

Commissioner Kris Major
Commissioner Annie Oakes
Commissioner Barbara St Clair
Commissioner Colleen Kirsten
Commissioner Alex Brannin

2. APPROVAL OF MEETING AGENDA

Motion made by Commissioner Kirsten, Seconded by Commissioner Oakes to amend the agenda to include the Historic Preservation Commission May 28, 2025 Special Meeting Minutes and add the Resource Guide as an action and discussion item.

Voting Yea: Commissioner Major, Commissioner Oakes, Commissioner St Clair, Commissioner Kirsten, Commissioner Brannin

3. APPROVAL OF MINUTES

- a. Motion to approve May 28th, 2025 and June 9, 2025 minutes as presented or with modifications.

Motion made by Commissioner Kirsten, Seconded by Commissioner Oakes to approve the May 28, 2025 Historic Preservation Commission Special Meeting Minutes as presented.

Voting Yea: Commissioner Major, Commissioner Oakes, Commissioner St Clair, Commissioner Kirsten, Commissioner Brannin

Motion made by Commissioner Oakes, Seconded by Commissioner St. Clair to approve the June 9, 2025 Historic Preservation Commission Regular Meeting Minutes as presented.

Voting Yea: Commissioner Major, Commissioner Oakes, Commissioner St Clair, Commissioner Kirsten, Commissioner Brannin

4. ACTION AND DISCUSSION ITEMS

- a. 100-year Property Recognition

The Commission discussed the property located at Dalton being recognized and potentially putting a photo of the property in the newsletter.

- b. Historic District Signage

The Commission discussed banners and Historic signage for the streetlights on Argonne. Commissioner Kirsten will get some cost estimates for the next meeting.

c. Millwood Trail Signs

The Commission discussed the trail signs that have been completed and are on the trail. Three signs are not on the trail yet, Commissioner Oakes and Commissioner St. Clair will search their records for the original signs created, Ms. Cassels will search for the sign company that made the signs and the cost of the signs. Commissioner Kirsten will also get some costs from some sign companies.

d. Outreach Events Opportunities

The Commission discussed attending Millwood Daze and if they could share a booth with the Planning Commission booth that will be promoting the Comprehensive Plan 2026 Periodic Update. The commission also discussed having a booth at Millwood Daze for the centennial celebration next year.

e. Local Register Forms and Assistance

The Commission discussed how the process would work if the Commission were to ask a person who was familiar with the local register form to work with property owners interested in placing their homes on the local register.

The Resource Guide was sent to Mr. Werst for review. Commissioner Oakes will verify that the glass section was included in the document.

f. 2026 Budget

The Commission discussed preparing a budget for 2026. They will work on prioritizing the items they would like to have in their budget.

5. COMMISSIONER COMMENTS

There were no Commissioner comments.

6. SET NEXT MEETING - August 11, 2025 at 2:00 pm.

The Commission decided to cancel the August 11, 2025 regular meeting and will have a special meeting on August 23, 2025 at Millwood Daze.

7. ADJOURNMENT

Motion made by Commissioner Oakes, Seconded by Commissioner St Clair to adjourn the Historic Preservation Commission Regular Meeting at 3:10 pm.

Voting Yea: Commissioner Major, Commissioner Oakes, Commissioner St Clair, Commissioner Kirsten, Commissioner Brannin



HISTORIC MILLWOOD RESOURCE GUIDE



Recommendations for the Improvements, Repairs, and Modifications of Millwood's Homes and Structures



**City of Millwood
9103 E. Frederick Avenue
Millwood, WA 99206
(509) 924-0960
www.millwoodwa.us**

TABLE OF CONTENTS

INTRODUCTION

IMPLICATIONS FOR HISTORIC PRESERVATION

WILL YOUR WORK REQUIRE A PERMIT?

RESOURCES FOR THE CARING OF MILLWOOD'S HISTORIC HOMES AND STRUCTURES

General

Entrances, Porches, and Steps

Windows, Doors, and Shutters

Roofs and Roofing

Masonry

Wood, Clapboard, Weatherboard, Shingles, and Other Wood Siding

Mechanical Systems

Fences and Retaining Walls

Rear Additions

Color and Exterior Finishes

GLOSSARY

Copying and republication of any and all parts of this guideline are strongly encouraged!

INTRODUCTION

The City of Millwood's rich history is reflected in its homes, commercial buildings, and nationally recognized historic district. To protect the unique character of Millwood, the City encourages that changes and additions to building exteriors and the construction of new dwellings be made in accordance with accepted historic guidelines. This resource guide is intended to assist property owners who want to be sensitive to preserving the historic nature of the city. **This resource guide does not impose obligations or requirements on any property owner regarding changes or additions to their own property.**

In 2001, the Millwood Historic District was officially added to the National Register of Historic Places by the US National Park Service. This selection was due in large part to the number of well-designed and maintained commercial and residential structures in the original Millwood area. District residents generally desire that the historic integrity of their neighborhood will be preserved for generations.

Property owners may also qualify for an exemption for a portion of property tax on improvements to historic properties. To be eligible for the tax break, the property must be on the Millwood Register of Historic Places or be a contributing property in a designated historic district; the rehabilitation work must be at least 25 percent of the assessed value of the building prior to the work; the work must be done in accordance with the Secretary of the Interior's Standards for Rehabilitation; and the improvements must have been completed within 24 months of the application.

RETAIN THESE GUIDELINES!

It is hoped that all Millwood residents will retain this resource guide to assist when and if it is necessary to make alterations or repairs to restore and preserve their homes.

This resource guide can inform homeowners in advance how to plan their projects.

Lastly, the guidelines provide useful advice and suggestions for the restoration and preservation of all homes and businesses in Millwood.



IMPLICATIONS FOR HISTORIC PRESERVATION

Many architects and contractors are not familiar with historic building and restoration recommendations or with the City of Millwood permit requirements. You may want to provide your architects, contractors, and subcontractors with a copy of this resource guide.

There are many examples in cities and towns where renovations were made without consideration for the historic importance of renovations within the larger environment. The guidelines provided here seek to preserve history while encouraging necessary updating.

MODIFYING A HISTORIC PROPERTY IN MILLWOOD

Do You Need a Permit?

New construction and modifications, not just those done to historic properties, often require a permit. Contact Millwood City Hall (info@millwoodwa.us or www.millwoodwa.us) to see if your proposed work requires a permit. To learn more about the historic district, how your property might be recognized, or how you can take advantage of property tax relief, feel free to attend meetings of the Millwood Historic Preservation Commission.

Guidelines for Caring for Historic Properties

From the perspective of historical preservation, the need for variety and change is evident to homeowners, but architectural details should be retained when repair is necessary. Areas visible from the street view are of greatest concern to preserve the integrity and atmosphere of historic neighborhoods. The following guidelines will assist with preserving the integrity and atmosphere of historic properties:

- **All structures should be recognized as products of their own time.** Alterations to create the appearance of an earlier era are discouraged. Designs for additions are appropriate if a design is compatible with the size, scale, color, material, and character of the existing building and neighborhood.
- **Details should be restored or should attempt to duplicate the original appearance with similar materials.** The repair of existing details with inappropriate materials such as siding, jamb casings, and bracket work made of aluminum should be avoided.
- **Maintain the use of a structure for its originally intended purpose** or to provide a compatible use which will require minimum alteration to the structure and its environment.

- **Rehabilitation work should not destroy distinguishing qualities or character** of the structure and its environment. The removal or alteration of any historic, original materials, or architectural features is not appropriate except where such materials or features can be duplicated in form, substance, and design.
- **Repairing or replacing deteriorated or missing material** with new materials should attempt to duplicate the old as closely as possible.

Entrances, Porches, and Steps

- **Retain all porch elements and steps** which are original to the dwelling. Replacement of all wooden, metal, iron, cast iron, terra cotta, tile, cement, stone, or brick elements such as handrails, balusters, columns, brackets, and other details should be made with comparable materials of the same size, dimension, and detailing. For example, round wooden tapered porch columns should be replaced with the same shape and style posts (not rectangular). Guides to original porch details should be obtained from neighboring houses or historic evidence.
- **Removal of porches or porch roofs** in the front façade is not appropriate. Owners are encouraged to restore any missing front porch or front porch roofs to original condition where they have been removed or altered. Removal of original porch detail elements such as handrails, balusters, columns, brackets, and roof decoration of wood, iron, cast iron, terra cotta, tile, stone, and brick destroy their intended appearance and is not appropriate.
- **Enclosure of front porches** with windows, walls, screens, or any non-original elements is not appropriate and is discouraged.
- **Existing transoms** and other porch embellishments characteristic of the dwelling should be retained, restored, or duplicated.
- **Doors** on the front façade should be original or historically accurate copies. Guides to original doors should be obtained from neighboring houses or historical evidence.

- **Porch ceilings** in the front façade should be restored with original material, usually tongue-and-groove ceiling bead, where appropriate. Use of plywood, drywall, fiberboard, or other material not original to the construction of the porch ceiling is not appropriate.
- **Porch floors** in the front façade should be restored with tongue-and-groove wooden flooring, where appropriate. Concrete floors original to the porches should be restored or replaced where necessary. Use of wooden decking material that is not tongue-and-groove, such as outdoor carpet, pressure-treated 1" × 6" typically used in modern decks, or any other material or covering not original to the dwelling is not appropriate.
- **Porch aprons** (lower area between the porch floor and ground) should be enclosed with the original material and design. Where the original material was wooden lattice, restore the lattice using crossed wood lattice of comparable thickness and design. It is preferable that the lattice is painted a darker color. The lattice should be framed in the manner original to the dwelling, usually by a wooden frame. It is inappropriate to attach the lattice without framing it in some manner. Nor is it appropriate to use brick, block, or other solid material to enclose apron areas in the front façade.
- **Porch lights** should be in the original location, usually in the ceiling or flanking the front entrance. Porch lighting fixtures should be historically appropriate for the dwelling.
- **Front porch** details such as floors, columns, brackets, handrails, and balusters should be painted.
- **Front steps** should be restored to original condition. Wood steps should be constructed using appropriate thickness and design of materials and with appropriate handrails and balustrades of wood. Concrete or masonry steps should be repaired with concrete. Placement of bricks over original concrete steps is not historically accurate; in addition, bricks will deteriorate within several years. Painting concrete or covering the front steps with outdoor carpet or other materials not original to the house is not appropriate.

- **Rear porches** visible from public view should be restored or repaired using materials which are compatible with the original character of the dwelling. While repairs or revisions to rear porches not visible from the street may be allowed more latitude in design, owners are encouraged to maintain rear porches in a manner consistent with the overall design of the home and which retains an open feeling. It is acceptable to enclose a rear porch if windows are used to retain the original porch-like feel of openness. Use of small windows or no windows when enclosing rear porches is not appropriate. When repairing or reconstructing handrails, balustrades, columns, and brackets of rear porches, it is appropriate to do so in the style and material original to the dwelling.
- **Construction of rear decks** is permissible. Owners are encouraged to use traditional detailing of handrails, balustrades, columns, and brackets on rear decks. Decks which are visible from the street should be constructed with materials and in a design which is compatible with the original character of the house.

Windows, Doors, and Shutters

- **Existing window and door openings** – including window sash, glass, lintels, sills, architraves, shutters, doors, pediments, hoods, steps, and hardware – should be retained. Owners of structures whose window and door openings have been altered in the past to reduce or increase glass area or to provide picture windows or standard door openings are strongly encouraged to restore these openings to their original sizes or to approximate those of their neighbors, duplicating the material, design, and hardware of the older window sash and doors if new sash and doors are used.
- **Infilling** of window and door openings to accommodate smaller or stock window units or doors is not appropriate.

- **Windows on the front façade** should be replaced with units historically compatible with neighboring buildings or the original windows of the dwelling and the existing façade. Homeowners are strongly urged to repair existing windows (stripping old paint and rebuilding) or replacing original windows with wooden or suitable replicas of the original windows. Aluminum and vinyl windows should not be used on the front façade of dwellings. Some window replacement companies are aware of and can readily provide historically appropriate replacements.
- **Window and door casings**, sashes, and mullions on the front façade should be painted and stained.
- **For storm doors and screen doors**, a design which is as simple as possible and contains as much glass as possible is preferred. Storm doors and screen doors should be of a style compatible with the original character and appearance of the building. Painting a metal or wooden storm or screen door and frame the same color as the main entry door or door trim is encouraged.
- **Storm doors and windows** should not alter the size or basic shape of the original door or window (for example, no use of rectangular storm windows over curved original windows).
- **Window shutters** should be of the same size, shape, and material (wood) of the original shutters. Window shutters should be of the same size window opening which they were originally intended to cover. Horizontal-slat type window shutters are in most cases historically correct. Wood is the preferred material for shutters. Plastic, vinyl, metal, or aluminum shutter replicas should not be used.
- **Introducing new window and door openings** into the principal elevations or enlarging or reducing window or door openings is generally not appropriate. However, if basement apartments are created, placement of doors and larger windows may be appropriate, particularly if hidden beneath a front porch or otherwise not readily visible from the street.

- **Awnings** should only be constructed of canvas or canvas-like material. Color and placement of awnings should not obscure existing architectural elements. Aluminum awnings are only appropriate if original to home design.

Roofs and Roofing

- **Preserve the original roof shape.** Existing dormers and chimneys should be retained. Repairs or reconstruction of roofs, dormers, and chimneys should be in dimensions, design, and materials existing in the original design as reflected in the residence or in neighboring dwellings. Existing roof pitches are to be retained.
- **Retain and repair the original roofing material,** whenever possible. Replacement roof materials should be the original material and not differ to such an extent from the old composition, size, shape, color, and texture that the appearance of the dwelling is altered.
- **Addition** of oversized dormer windows, picture windows, or bubble or raised skylights (except where not visible from the street, front or side of the dwelling) should not be made.
- **Box gutters** should be retained. All façade downspouts should be copper or aluminum and painted appropriately.
- **Architectural features** which give the roof its essential character should be replaced or restored. This includes dormer windows, cupolas, cornices, brackets, chimneys, cresting, and weathervanes.
- **Tarring of roofs** where visible from the street, front, or side of the building is not encouraged. Tarring of roofs is typically not a long-range solution to roof problems. Slate or tile roof should not be painted or tarred.

Masonry

- **Retain original masonry and mortar** whenever possible, without the application of any surface material or treatment.

- **Duplicate old mortar** in composition, color, texture, joint size, method of application, and joint profile.
- **Repair stucco** with a stucco mixture duplicating the original as closely as possible in appearance and texture.
- **Clean masonry** with the gentlest method possible to preserve its life such as low-pressure water and soft, natural bristle brushes. Sandblasting destroys brick and stonework. Brickwork and stonework may be cleaned with hydrofluoric acid in concentration of not more than 5% or equivalent.
- **Deteriorated masonry** work should be repaired to be inconspicuous and compatible with that existing on the house or structure.
- **Unnecessary application** of waterproof or water repellent coatings or other treatments is discouraged unless required to solve a specific technical problem that has been studied and identified. The process can accelerate deterioration of the masonry and can be expensive.
- **Repointing** with a mortar of high Portland cement content can cause deterioration. The bond created is often stronger than the building material (such as brick) due to the differences in porosity and expansion qualities.
- **Existing unpainted masonry** surfaced generally should remain unpainted.
- **Existing original masonry** surfaces should not be covered with other materials. Where such surface coverings have been previously installed, the owners are encouraged to remove them and restore the underlying masonry surface.
- **Materials that were not available** when the building was constructed, such as artificial brick siding, artificial cast stone, or brick veneer, should not be used.
- **Removing masonry architectural features** such as doorway pediments and windowsills is not appropriate.
- **Repair or replace original brick or stone** with brick or stone of the same size, color, and texture.

Wood, Clapboard, Weatherboard, Shingles, and Other Wooden Siding

- **Repair, restoration, or replacement** of existing wood siding should be performed with new wood or other appropriate material that duplicates the size, shape, and texture of the original wood siding. Replacement or repair should not be performed using aluminum, vinyl siding, artificial stone, brick veneer, or asbestos or asphalt shingles or siding.
- **Asbestos siding** is not allowed for new work, and owners are encouraged to remove existing asbestos siding and restore or replace the underlying wood surface when permitted by building code. Removal or repair of any asbestos material should be performed by trained and accredited asbestos professionals.
- **No removal of wooden architectural features** such as cornices, brackets, window trim, and doorway pediments should be performed. Such original details are, in most cases, an essential part of a building's character and appearance.
- **Mixing different types** of siding on a building is not advisable in most cases unless it is historically appropriate.
- **Retain corner and sill boards** when replacing rotted or damaged siding. If these details have rotted, replace them with new members of wood or other appropriate materials similar in size and dimension. Take care when installing siding to retain the full width of the corner and sill boards.

Mechanical Services (Heating, Air Conditioning, Electrical, Plumbing, Fire Protection)

- **Place television antennae, satellite dishes, and mechanical equipment** such as air conditioners where they are not visible from the street. Permanent through-the-wall air conditioning units on front façades are not appropriate.
- **Install necessary building services** in areas and spaces that will require the least possible alteration to the plan, materials, and appearance of the building.

- **Install vertical runs of ducts, pipes, and cables** in interior closets, service rooms, and wall cavities where there will not be a visual intrusion on the exterior of the building.
- **Avoid cutting holes** in important architectural features, such as cornices, decorative ceilings, and paneling.
- **Avoid placement of electrical and gas meters** in areas of the front façade that are visible from the street. It is preferable to place these meters along the side or rear of the house when possible.

Fences and Retaining Walls

- **Fences or retaining walls are specifically regulated under the Millwood City Code (MMC 17.38.005[f]).**
- **A fence or retaining wall**, where one is appropriate, should harmonize with the historic character of the house and the adjoining houses.
- **Avoid placing concrete walls, chain link fence, or solid wood fence** in the front or visible side portions of a house. However, such fences and walls may be appropriate when used in the rear of houses.
- **Depending on the historic character** of the home and context of adjacent walls and fences, certain wood fences, low stone walls, and coated chain link fence may be appropriate in the front or visible side and rear yards.

Rear Additions and Back Porch Enclosures

- **Historically, the backs of homes in Millwood** and elsewhere are not as elaborate as the street façades. This was where the money was saved, using less expensive materials – for example, wood instead of masonry and smaller panes of glass in windows. Homeowners have more latitude when remodeling rear areas not visible from the street but are encouraged to choose designs and materials consistent with the original structure to preserve the integrity and aesthetic of the home. For properties that have not maximized their lot coverage allowed by zoning laws, building a rear addition is an option. Another popular modification to the back of homes is enclosure of an existing sleeping porch.

- **Use windows that match** the other elevations in profile and glazing or are sympathetic to the existing building on additions that can be seen from a public street or alley. Exposed concrete walls are unacceptable except at basement level. Plain sheet wood panel products such as Texture-III or plywood, corrugated metal, or plastic panels are not acceptable.
- **Compose a rear addition or porch enclosure to reflect** the overall style of the home itself. A contrasting design can be considered if it is not visible from a public street or alley and does not destroy existing character-defining details, ornamentation, and materials of a rear elevation. A successful addition should be compatible with the design of the rear elevation of the existing building.







Color and Exterior Finishes



- **Retain the original or early color and texture** of masonry surface whenever possible. Discover the original paint color and finish when possible. Repaint with colors based on the original color when appropriate. It is not appropriate to refinish exterior wood details to a natural or stained finish without some evidence that this was the original exterior surface.
- **Use a color scheme appropriate to age and style** of the home. Many houses in Millwood built after the turn of the 20th century originally had lighter colors on the trim. Owners of adjoining houses of substantial similarity should consider compatible color schemes.




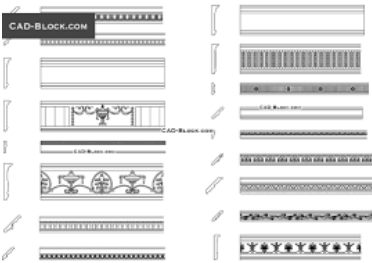

- **Color selection** is important in the maintenance of the architectural details such as trim, sills, headers, balconies, metal work, etc. In general, brick and stone elements like headers and sills should be kept unpainted and cleaned. Keep the following color principles in mind:
 - Color emphasizes details.
 - Intense colors distract from a harmonious design.
 - Light colors bring out detail, while dark obscures them.
 - Gloss or semi-gloss paint can be easily cleaned.
 - Seek professional advice or request information from other homeowners who have used appropriate colors.
- **Select colors for the wood trim to harmonize** with the natural color of masonry. Scrape down the trim and other painted surfaces to find out what the original colors were, since these will usually relate best to the whole building. Select colors for trim that contrast with brick but are in the same range of color.
- **Change the paint color at inside corners only**, and avoid outside corners, for best overall effect.
- **Select exterior body and trim colors** from historical selections.


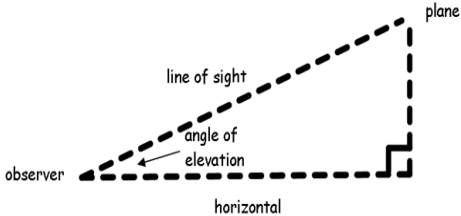
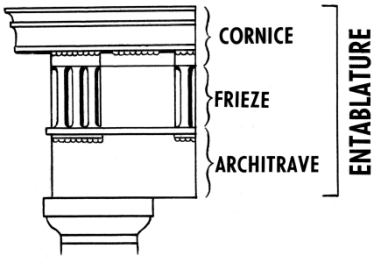



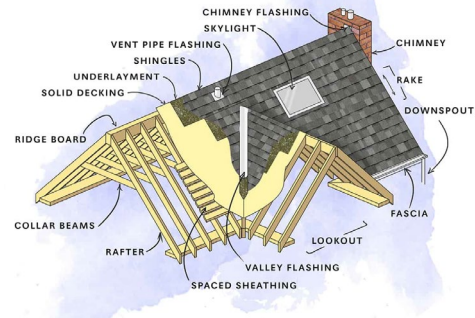
GLOSSARY

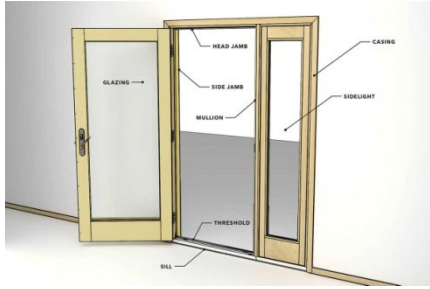
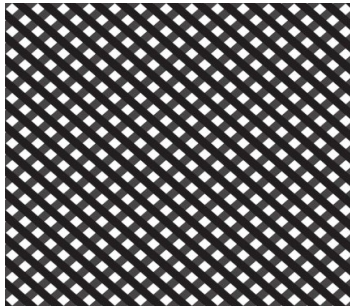

Term	Definition	Image
<u>Baluster</u>	A spindle or post supporting the railing of a balustrade	
<u>Balustrade</u>	An entire railing system with top rail and balusters	
<u>Bargeboard</u>	A decoratively carved board attached to the projecting edges of the rafters under a gable roof; also called a vergeboard	
<u>Bay</u>	The regular division of the façade of a building, usually defined by windows or other vertical elements	
<u>Bay Window</u>	A window in a wall that projects at an angle from another wall	
<u>Bond</u>	The pattern in which bricks are laid to increase the strength of the wall or enhance the design.	



Term	Definition	Image
<u>Bracket</u>	A small carved or sawn wooden projecting element which supports a horizontal member such as a window, cornice, or door hood.	
<u>Bungalow</u>	The word <i>bungalow</i> can be traced to India, where it was used by the British in the 19 th Century to designate a house type that was one level and had large, encircling porches. The bungalow is built of wood and stucco with exposed rafters, wide overhangs, large porches, and chimneys of brick or stucco.	
<u>Capitol</u>	The upper portion of a column or pilaster.	
<u>Chamfer</u>	A surface produced by beveling an edge or corner, usually at a 45-degree angle as the edge of a board or post.	
<u>Chimney</u>	A vertical structure containing one or more flues to provide draft for fireplaces and to carry off gaseous combustion products from fireplaces or furnaces.	

Term	Definition	Image
Clapboard	Siding consisting of overlapping narrow horizontal boards usually thicker at one end than the other.	
Column	A vertical free-standing shaft or pillar that supports a structure from above	
Coping	A cap or covering to a wall, either flat or sloping, to shed water.	
Corner Board	A vertical strip of wood placed at the corners of a frame building.	
Cornice	A projecting molding at the top of a wall such as may be found below the eaves of a roof.	
Dentil	Small square blocks closely spaced to decorate a cornice	






Term	Definition	Image
Dormer	A small window or louver with its own roof that projects from a sloping roof.	
Double-Hung Window	A window with two sashes, each sliding vertically past the other.	
Downspout	A pipe for directing rainwater from the roof to the ground.	
Eave	The edge of a roof that projects beyond the face of a wall.	 FIG. 59. EAVES
Elevation	The external face of a building or a drawing of the external wall.	
Entablature	The horizontal assembly of moldings immediately above the column capital; the cornice.	
Facade	The front face or elevation of the building.	




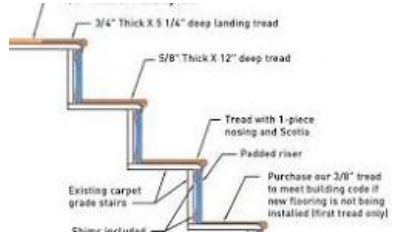
Term	Definition	Image
Fanlight	A semi-circular window over a door or in a gable with radial muntins in the form of an open fan.	
Fascia	A flat board with a vertical face that forms the trim along the edge of a flat roof or along the horizontal or eave sides of a pitch roof.	ANATOMY OF A ROOF 
Fenestration	The arrangement or pattern formed by windows in a building.	
Gable	The triangular section of a wall to carry a pitched roof.	
Gable Roof	A roof with a central ridgepole and one slope at each side.	
Gingerbread	Pierced curvilinear ornament made with a jig or scroll saw.	



Term	Definition	Image
Head	The top of the frame of a door or window.	
Hipped Roof	A roof with uniform slopes on all four sides.	
Lattice	An openwork grill of interlacing wood strips; used as a screening.	
Lite	A pane of glass or an insulating glass (IG) unit used in a window, door, or unit skylight.	
Lintel	A horizontal beam bridging an opening, usually of wood or stone carrying the weight of the structure above.	
Masonry	Wall material such as brickwork or stonework.	

Term	Definition	Image
<u>Modillion</u>	An ornamental block applied to the underside of the projecting member of a cornice.	
<u>Mortar (2nd def.)</u>	A plastic mixture of lime, sand, and water, with or without Portland cement. Used in masonry construction in the joints of brick or stone to cement them into place.	
<u>Molding</u>	A long narrow strip of wood or metal, plain, curved or formed with regular channels and projections; used for concealing joints and decorative purposes.	
<u>Mullion</u>	A vertical post between sashes in multiple window installations.	
<u>Muntin</u>	Horizontal and vertical strips of wood or metal holding the window panes in place.	

27

Term	Definition	Image
Ridge	The line at the top of the sloped roof.	
Riser	The vertical face of a stair step.	
Sash (2nd def.)	The moveable framework holding the glass in a window or door.	
Shingle	Tile for covering roofs or walls, usually made of asbestos, asphalt, wood, or terra cotta, cut to standard shapes and sizes.	
Siding	The exterior wall covering of a structure.	
Signage	A display board or surface used for directions, identification, instructions, or advertising.	

Term	Definition	Image
Sill	The horizontal water-shedding element at the bottom of a door or window frame.	
Soffit	The exposed undersurface of an eave or cornice of a building.	
Stucco	A cement plaster applied to the exterior of a building, either smooth or textured, and often painted.	
Transom	An opening over a door or window containing a glazed or solid sash	
Tread (noun)	Horizontal surface of a step.	

Term	Definition	Image
Trellis	Lattice work as an outdoor screen, often used as a support for vines or a barrier below a porch.	
Trim	The framing of a feature on a façade usually of a color and material different from that of the adjacent wall surface.	
Turned work	Woodwork shaped on a lathe.	
Veranda	From the Hindi word <i>varanda</i> , denotes a roofed, open gallery, porch, or balcony extending along the outside of a building, designed for outdoor living in hot weather.	
Vergeboard (see Bargeboard)	The vertical face board following and set under the roof edge of a gable, sometimes decorated by carving.	

Term	Definition	Image
Vernacular (regarding buildings)	A style of architecture with characteristics common to a particular region of the country.	

