



TOWN OF JEROME

POST OFFICE BOX 335, JEROME, ARIZONA 86331

(928) 634-7943

www.jerome.az.gov

AGENDA

SPECIAL BUDGET COUNCIL MEETING OF THE TOWN OF JEROME

COUNCIL CHAMBERS, JEROME TOWN HALL
600 CLARK STREET, JEROME, ARIZONA

TUESDAY, JANUARY 13, 2026, AT 6:30 PM

Due to the length of this meeting, Council may recess and reconvene at the time and date announced.

Pursuant to A.R.S. 38-431.02 notice is hereby given to the members of the Council and to the General Public that the Jerome Town Council plans to hold the above meeting. Persons with a disability may request an accommodation such as a sign language interpreter by contacting Kristen Muenz, Deputy Clerk, at 928-634-7943. Requests should be made early enough to allow time to arrange the accommodation. For TTY access, call the Arizona Relay Service at 800-367-8939 and ask for the Town of Jerome at 928-634-7943.

Notice is hereby given that pursuant to A.R.S. 1-602.A.9, subject to certain specified statutory exceptions, parents have a right to consent before the State or any of its political subdivisions make a video or audio recording of a minor child. Meetings of the Town Council are audio and/or video recorded, and, as a result, proceedings in which children are present may be subject to such recording. Parents in order to exercise their rights may either file written consent with the Town Clerk to such recording, or take personal action to ensure that their child or children are not present when a recording may be made. If a child is present at the time a recording is made, the Town will assume that the rights afforded parents pursuant to A.R.S. 1-602.A.9 have been waived.

We acknowledge we are on the traditional lands of the Yavapai and Apache People and we, the Town of Jerome, pay respect to the elders both past and present.

1. CALL TO ORDER/ROLL CALL

Mayor/Chairperson to call meeting to order
Town Clerk to call and record the roll.

2. NEW BUSINESS

Discussion/Possible Action

**A. Council Will Continue Discussions on the FY 2026-2027 Budget Priorities
Focusing on Personnel Related Items During this Budget Meeting**

Staff may present and Council may provide direction related to personnel and capital improvements, along with all budget funds and functions possibly being discussed.

3. ADJOURNMENT

The Town Council may recess the public meeting and convene in Executive Session for the purpose of discussion or consultation for legal advice with the Town Attorney, who may participate telephonically, regarding any item listed on this agenda pursuant to A.R.S. § 38-431.03 (A)(3). The Chair reserves the right, with the consent of Council, to take items on the agenda out of order.

CERTIFICATION OF POSTING OF NOTICE


The undersigned hereby certifies that this notice and agenda was posted at the following locations on or before 7 p.m. on _____ in accordance with the statement filed by the Jerome Town Council with the Jerome Town Clerk: (1) 970 Gulch Road, side of Gulch Fire Station, exterior posting case; (2) 600 Clark Street, Jerome Town Hall, exterior posting case; (3) 120 Main Street, Jerome Post office, interior posting case.

Kristen Muenz, Deputy Town Clerk

File Attachments for Item:

A. Council Will Continue Discussions on the FY 2026-2027 Budget Priorities Focusing on Personnel Related Items During this Budget Meeting

Staff may present and Council may provide direction related to personnel and capital improvements, along with all budget funds and functions possibly being discussed.

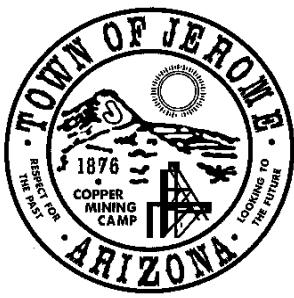

TOWN OF JEROME

POST OFFICE BOX 335, JEROME, ARIZONA 86331
(928) 634-7943 FAX (928) 634-0715

Founded 1876
Incorporated 1899

STAFF SUMMARY REPORT

FROM: Brett Klein, Town Manager/Clerk

ITEM: **Item: Discussion on FY 2026-2027 Personnel Budget Priorities**

MEETING DATE: January 13, 2026

Summary:

During this Budget discussion, staff is seeking Council input and direction related to one of the largest Town expenditures, personnel-related costs. This year the Social Security Administration Cost of Living Adjustment (SSA COLA) is 2.8% and the Employment Cost Index for State and Local workers (ECI) is 3.6% for the third quarter which followed a 4.0% in quarter 2. In talking with colleagues in other Verde Valley communities, most are seeking an average of a 3.5 – 4.25% annual adjustment. The Town is also still a bit behind in terms of other benefits, with surrounding communities paying 85-98% of dependent insurance premiums as well as providing more options. The Town is also the only community in the area that does not participate in the Arizona State Retirement System. Those contributions are set at 11.86% for cities and towns. The current contribution for the Town of Jerome is 10% with the potential of 12% based on employee matching.

Provided the budget numbers can sustain the fiscal impact, staff are recommending the following: 1) A modest 3.5% wage adjustment across the board for all employees; 2) Increasing the dependent insurance premium Town contributions to a flat 90% from the current 85%; and 3) Adding a total of one (1) paid holiday with a half of a paid holiday for Christmas Eve and half of a paid holiday for New Year's Eve. Cottonwood and other peer communities have moved toward either the full-day or a half-day.

Fiscal Impact:

The overall cost of this proposal for the entire year across all staff members both full and part-time is \$4,710 for the insurance change, and \$58,341 for the cost-of-living wage adjustments.

Recommendation:

Provide input and direction for subsequent budget meetings and inclusion in the first draft budget.

Item A.

Fiscal Year 2026-2027 Budget Calendar

Item A.

Date	Item
Monday, November 24, 2025	Council to review and prioritize initial capital items and projects as presented by staff and provide goals and objectives
Tuesday, January 13, 2026	Council to consider staff proposal for wages and benefits
Wednesday, January 28, 2026	Department Head Discussion - New Program & Capital Improvement Requests. Hand Out Budget Worksheets
Thursday, February 19, 2026	Department Budget Worksheets Due
Tuesday, March 10, 2026	Department Capital Requests and New Programs Finalized
Tuesday, March 10, 2026	Council Budget Workshop-Council Goals, Priorities and Consider Capital Requests, Wages and Insurance
Tuesday, April 14, 2026	Department Heads Present Budget Requests and Receive Council Input and Feedback
Tuesday, May 12, 2026	Council Budget Workshop - Final Input and Direction
Wednesday, May 27, 2026	Adopt Tentative Budget
May 30th and June 6, 2026	Publish Budget once a week for two consecutive weeks; Include time and place of budget hearing and a statement indicating where the proposed budget may be viewed ***
Tuesday, June 2, 2026	Publish Tentative Budget Summary on Website and make available at Library and Town Hall
Tuesday, June 9, 2026	Public Hearing on the Budget and Adopt - RESOLUTION
Monday, June 15, 2026	Publish Final Adopted Budget on Website and Make Available at Library
***	Publish paragraph notice of PH and Schedule A from State Budget Forms - Post Schedule A and Notice in three (3) place
Tuesday, July 14, 2026	Adopt Property Tax Levy Resolution and Forward Certified Copy of Resolution to Yavapai County



HX450REL

20 - 25 YARD

Amrep's **legendary quality** comes to the **rear loader**


You trust Amrep truck bodies because they're built to be better, tougher, and longer lasting. Building on that tradition, the new Amrep rear load truck is the only rear loader to feature a Hardox body. That's in addition to Amrep's legendary lower maintenance, lower cost of ownership and proven-simple design. Which means our new rear loader truck might just be the longest lasting truck ever made.

FEATURES:

- Hardox-steel body construction means a longer lasting and incredibly durable truck
- Low maintenance (versus ASL – automated side loader) meaning less downtime
- Lower cost of ownership
- Maintenance and support readily/easily available through Wastequip WRX and parts from Wastebuilt



REAR LOADER

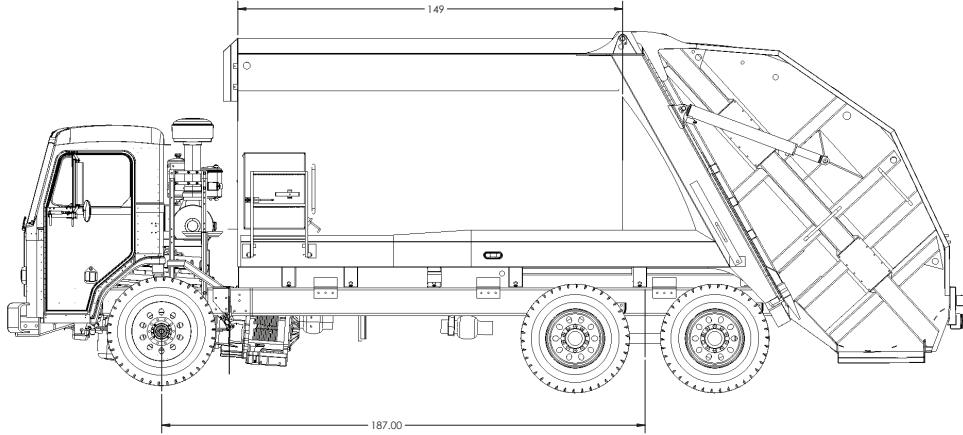

PERFORMANCE SPECIFICATIONS

Working RPM @ Idle
Dump Cycle: 16 seconds
Sweep Extend: 4 seconds
Sweep Retract: 2 seconds
Slide Extend: 3 seconds
Slide Retract: 7 seconds
Tailgate Open: 30 seconds
Tailgate Closed: 18 seconds
Compaction = 900 lb/yd³
Chromium Wear Plates and Shoes

HYDRAULICS

Pump Single gear or vane with packing flow control system
Control Valves Primary: Parker VA35
Oil Reservoir: 17–20 yd³: 40 gallon
25–32 yd³: 50 gallon
Filter Parker: 40 CN, 100 mesh suction strainer

STANDARD BODY SPECIFICATIONS

Body Floor: 3/16 in. AR450 Hardox
Side Walls, Front Section: 1/8 in AR450 Hardox
Side Walls, Rear Section: 1/8 in. AR450 Hardox
Roof: 1/8 in. AR450 Hardox

TAILGATE SPECIFICATIONS

Tailgate Walls: 3/16 in. AR450 Hardox
Hopper Floor Liner: 2mm AR450 Hardox

CYLINDERS

Ejector Cylinder 6-1/4 in. bore x 5-3/4 in.
Ejector Cylinder 6-1/4 in. bore x 5-3/4 in. rod x 88-3/4 in. stroke (20 yd, 3-stage)
7-1/2 in. bore x 7 in. rod x 119-1/2 in. stroke (25 yd, 4-stage)
Slide Cylinder 4-1/2 in. bore x 3-1/2 in. rod x 32-1/2 in. stroke
Sweep Cylinders 4 in. bore x 3 in. rod

1555 S. Cucamonga Ave.
Ontario, CA



909.923.0430



Amrepproducts.com



HV607 SBA

Sales Proposal For:
TOWN OF JEROME

Presented By:
RWC Group

Prepared For:
 TOWN OF JEROME
 BRETT KLEIN
 600 CLARK STREET
 Jerome, AZ 86331-
 (928)634 - 7943
 Reference ID: N/A

Presented By:
 RWC Group
 Mary R Wilson
 600 North 75th Avenue
 PHOENIX AZ 85043 -
 (602)307-1050

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2027 HV607 SBA (HV607)

AXLE CONFIG: 6X4
APPLICATION: Rear Loader
MISSION: Requested GVWR: 56000. Calc. GVWR: 56000. Calc. GCWR: 80000
 Calc. Start / Grade Ability: 24.36% / 1.25% @ 55 MPH
 Calc. Geared Speed: 78.2 MPH
DIMENSION: Wheelbase: 232.00, CA: 164.90, Usable CA: 161.90, Axle to Frame: 75.00
ENGINE, DIESEL: {Cummins L9 300} EPA 2024, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM
 Governed Speed, 300 Peak HP (Max)
TRANSMISSION, AUTOMATIC: {Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 60,000-lb GVW Max, Refuse/Mixer Omit Item (Clutch & Control)
CLUTCH: {Meritor MFS-16-133A} Wide Track, I-Beam Type, 16,000-lb Capacity
AXLE, FRONT NON-DRIVING: {Meritor MT-40-14X-4DFR} Single Reduction, 40,000-lb Capacity, .433"(11mm) Wall Housing
AXLE, REAR, TANDEM: Thickness, R Wheel Ends Gear Ratio: 5.29
CAB: Conventional, Day Cab
TIRE, FRONT: (2) 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
TIRE, REAR: (8) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, TANDEM: {Hendrickson PRIMAAX EX} 46,000-lb Capacity, 56" Axle Spacing, 9.0" Ride Height, with Shock Absorbers
PAINT: Cab schematic 100WL
 Location 1: 9219, Winter White (Std)
 Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HV60700	Base Chassis, Model HV607 SBA with 232.00 Wheelbase, 164.90 CA, 161.90 Usable CA, and 75.00 Axle to Frame.	6136/3544	9680

AXLE CONFIGURATION

1AND	AXLE CONFIGURATION 6x4	0/0	0
<u>Notes</u> : Pricing may change if axle configuration is changed.			

ENGINE

12EYW	ENGINE, DIESEL {Cummins L9 300} EPA 2024, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (Max)	557/7	564
12VKL	EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2026	0/0	0
12WZY	CARB EMISSION WARR COMPLIANCE for Cummins L9 Engines	0/0	0
12WZJ	CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0

Notes
: CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.

12UWZ	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	22/-4	18
<u>Includes</u>			

: DEAERATION SYSTEM with Surge Tank
: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps
: RADIATOR HOSES Premium, Rubber

12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
<u>Includes</u>			

: FAN Nylon

12VBG	AIR CLEANER Dual Element, with Integral Pre-Cleaner	12/0	12
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0

12WUL	BLOCK HEATER, ENGINE {Phillips} 120V/1000W, with "Y" Cord for Dealer Installed 120V/300W Oil Pan Heater	0/0	0
<u>Includes</u>			

: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0
<u>Includes</u>			

: THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary,

12VXT	Variable Speed; Mounted on Steering Wheel	0/0	0
<u>Includes</u>			

TRANSMISSION

13BDP	TRANSMISSION, AUTOMATIC {Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 60,000-lb GVW Max, Refuse/Mixer	234/49	283
<u>Includes</u>			

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
13WUJ	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS), Front Loaders, Rear Loaders, Recycling/Packer Trucks, Package Number 142	0/0	0
13XAN	PTO LOCATION Customer Does Not Intend to Install PTO	0/0	0
13XBG	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, with DynActive, Dynamic Shift Sensing, Neutral at Stop-Premium, with Coast Mode and Acceleration Rate Management (FuelSense 2.0 Max)	0/0	0
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1

CLUTCH

11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
-------	-------------------------------------	-----	---

REAR AXLES, SUSPENSIONS

14GVY	AXLE, REAR, TANDEM {Meritor MT-40-14X-4DFR} Single Reduction, 40,000-lb Capacity, .433"(11mm) Wall Housing Thickness, R Wheel Ends . Gear Ratio: 5.29	0/2101	2101
14UNX	SUSPENSION, REAR, AIR, TANDEM {Hendrickson PRIMAXX EX} 46,000-lb Capacity, 56" Axle Spacing, 9.0" Ride Height, with Shock Absorbers	0/1089	1089
14WMJ	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 50 thru 64.99 Pints	0/0	0
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab	0/1	1

FRONT AXLES

2AUR	AXLE, FRONT NON-DRIVING {Meritor MFS-16-133A} Wide Track, I-Beam Type, 16,000-lb Capacity	186/0	186
------	---	-------	-----

FRONT SUSPENSIONS

3ADE	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 16,000-lb Capacity, with Shock Absorbers	44/0	44
3770	SPRINGS, FRONT AUXILIARY Rubber	10/0	10

CABS, COWLS, BODIES

16030	CAB Conventional, Day Cab	0/0	0
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab	6/1	7
	<u>Includes</u>		
	: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger		
	: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Reading Lights; Integral to Overhead Console, Center Mounted		
	: SUN VISOR (3) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side		
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u>		
	: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)		
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type	0/0	0
16XJN	INSTRUMENT PANEL Flat Panel	0/0	0
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16SNP	MIRRORS (2) C-Loop, Power Adjust, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	8/0	8
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16SJW	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (2) Right and Left Sides, Black, Heated, 7.5" Sq.	9/0	9
16VLV	MONITOR, TIRE PRESSURE Omit	-10/-1	-11
16VCC	SEAT BELT All Orange; 1 to 3	0/0	0
16KBM	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Mordura Cloth, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Seat Back Adjust	0/0	0
16SMZ	SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Mordura Cloth, for use with Batteries in Cab	35/9	44
16HCH	SEATBELT WARNING LIGHT IND. Mounted in Dash, Will Flash when Park Brake is Disengaged and Driver Seatbelt Unfastened, Audible Alarm to Remind Driver to Fasten Seatbelt	0/0	0
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0

FRAMES

1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	281/549	830
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty	0/0	0
1MEJ	FRAME DIMPLE Dimple on Left and Right Top Flange of Frame Rail to Reference Rear Axle Centerline	0/0	0
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8
1LEH	LICENSE PLATE HOLDER Single Plate, Swing Type, Mounted Below Front Bumper	3/0	3
1WGY	WHEELBASE RANGE 221" (560cm) Through and Including 262" (665cm)	495/-495	0

BRAKES

4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6	0/0	0
------	---	-----	---

Code	Description	F/R Wt	Tot Wt
		(lbs)	(lbs)
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control	0/0	0
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4XCJ	BRAKES, FRONT {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 23,000-lb Capacity	0/0	0
4XDX	BRAKE CHAMBERS, FRONT AXLE 20 SqIn, for Air Disc Brakes	1/0	1
4XCK	BRAKES, REAR {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 26,000-lb Capacity per Axle	0/0	0
4XEA	BRAKE CHAMBERS, REAR AXLE 18/24 SqIn Spring Brake, Double Diaphragm, for Air Disc Brakes	0/0	0
4XEE	PARK BRAKE CHAMBERS,ADDITIONAL (2) Spring Brake Type	0/60	60
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4EBT	AIR DRYER {Bendix AD-IP} with Heater	15/12	27
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	15/6	21
4WZJ	AIR TANK LOCATION (2) : One Mounted Under Each Rail, Front of Rear Suspension, Parallel to Rail	-24/43	19
4722	DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank	1/0	1

STEERING

5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	101/-5	96
5710	STEERING COLUMN Tilting and Telescoping	18/1	19
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0

DRIVELINES

6DGS	DRIVELINE SYSTEM {Dana Spicer} SPL140 Main Driveline with SPL170 Interaxle Shaft, for 6x4	4/20	24
------	---	------	----

EXHAUST SYSTEMS

7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	145/32	177
7BEV	AFTERTREATMENT COVER Steel, Black	11/2	13
7SCP	ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger	0/0	0
7WCK	EXHAUST HEIGHT 12' 6"	24/10	34
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	11/5	16
7WAZ	TAIL PIPE (1) Turnback Type	7/3	10

ELECTRICAL SYSTEMS

8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered	0/0	0
------	---	-----	---

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
8XLT	ALARM, PARK BRAKE, TIMER Programmable Parameter to Change Alarm Trigger Time	0/0	0
8XHC	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner when Vehicle Park Brake is "NOT" Set, with Ignition "ON" or "OFF" and any Door Opened and Brake Pedal Released	0/0	0
8GXC	ALTERNATOR {Leece-Neville AVI160P2007} Brush Type, 12 Volt, 210 Amp Capacity, Pad Mount, with Remote Sense	1/0	1
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8THB	BACK-UP ALARM Electric, 102 dBA	0/3	3
8XDZ	BATTERY BOX Steel, 2-3 Battery Capacity, Mounted Inside the Cab, Under Passenger Seat	-25/9	-16
8MMZ	BATTERY SYSTEM {Fleetrite AGM-GP31} Maintenance-Free, (3) AGM 12-Volt 2475CCA Total, Top Threaded Stud	65/41	106
8HAB	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/ Turn	2/0	2
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8XMB	CONNECTOR, DASH, CENTER PANEL Cab Wiring for TMC RP1226 Vehicle Accessory Connector; Includes 14-pin Connector with Switched Power, Battery Power, Ignition Power, Ground & Body 250K Datalink, Connector Located Behind Instrument Panel Center Console	3/0	3
8XKC	HEADLIGHTS Halogen, with Daytime Running Lights, Automatic Twilight Controlled	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8XHN	HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord	3/0	3
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8899	JUMP START STUD (2) 12V, Remote Mounted	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8RMZ	SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars	6/2	8
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	10/0	10
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0

FRONT END

9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5
9585	FENDER EXTENSIONS Rubber	6/0	6
9HBM	GRILLE Stationary, Chrome	0/0	0
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0

SPEEDOMETER, TOOLS, MISC

10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan	1/0	1
10RHG	DUAL DRIVE Customer Does Not Intend to Convert to In-Cab Dual Drive Positions	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
10WKN	KEYS - ALL ALIKE, ID I-1624 Compatible with Z-250	0/0	0
10BAE	LABEL, DEF "DEF ONLY"	0/0	0
10WWP	MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension, for Tire Size 425/445	3/0	3
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100 <u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WL"	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10WCY	SAFETY TRIANGLES	6/0	6

FUEL TANKS

15SGD	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 100 US Gal (379L), Mounted Left Side, Under Cab	37/22	59
15WHV	ANTI-SIPHON DEVICE for Single Tank; 2-Inch Diameter; Located inside Fuel Tank Fill Neck	1/0	1
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
15924	FUEL TANK STRAPS Bright Finish Stainless Steel	0/0	0
15LNS	FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine	-2/-3	-5

WHEELS, TIRES - FRONT

27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc	62/0	62
7792545437	(2) TIRE, FRONT 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	62/0	62

WHEELS, TIRES - REAR

28DTT	WHEELS, REAR {Accuride 28828} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs	0/56	56
7382135444	(8) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/40	40

WHEELS MISC OPTIONS

29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil Cab schematic 100WL Location 1: 9219, Winter White (Std) Chassis schematic N/A	0/0	0
-------	---	-----	---

Services Section:**WARRANTY**

40128	WARRANTY Standard for HV507/HV509, HV50B, HV607/HV609 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A	0/0	0
40NSG	CARB COMPANION PLAN for CARB B6.7 and L9 Engines	0/0	0

Total Component Weight:

8621/7209 (lbs) 15830 (lbs)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
1	<p>AMHRL25</p> <p>Furnish and Install: One (1) Amrep Hardox Rear Loader Full Push Out AMHRL-25 on Your 3-Axle Cab & Chassis</p> <p>See Standard Specification Sheet - 25-yard Elliptical Body Style - 3.5 Cubic Yard Hopper, Full Push-Out Ejection, Body Material:</p> <p>Body Floor - 3/16 In Hardox 450 Side Walls - 1/8" Hardox AR450 Roof - 1/8" Hardox AR450</p> <p>Packer Shoes: UHMW Polyethylene</p> <p>Body Door: Large Street Side Service Door</p> <p>Hopper Floor Liner: 1/8" Hardox 450</p> <p>Sweep Cylinders 4 in. bore x 3 in. rod, 3/16" Hardox AR450</p> <p>Slide Cylinder 4-1/2 in. bore x 3-1/2 in. rod x 32-1/2 in. stroke</p> <p>Controls: Dual Lever Controls Outside LH Side Control Valves Primary; Parker VA35</p> <p>Paint: Single Color - Body to Match Cab, Unless Otherwise Noted</p> <p>Color Code: Default Match Cab White</p> <p>Additional Items: Broom & Shovel Mounted on Body Shell, Fire Extinguisher 20lb on Tandem Fender Work Light</p> <p>Standard 12 Month Warranty on Workmanship and Materials (More Warranty Options Below)</p> <p>Body Mounted Fire Extinguisher 20lb</p> <p>LED Body Side Backing Assist Lights - reverse activated</p> <p>Dual Strobe Lights, Amber - upper LH & RH on tailgate - in-cab switch</p> <p>Tool Box (18 x 18 x 24) - frame mounted</p> <p>Left Hand Buzzer Kit</p> <p>Dual Broom and Shovel Rack - mounted on both sides of tailgate</p> <p>Hopper Floor Kit (1/4 - 150,000 psi in lieu of standard 3/16 150,000 psi)</p> <p>Adjustable Roll Bar with Control Kit</p> <p>Dual Hopper Work Light Kit - two lights - switch in cab</p>	0/0	0
2	State Contract CTR069476 2%	0/0	0
Total Body Allied:		0/0 (lbs)	0 (lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Total Factory List Price Including Options:		\$180,985.00
Freight Charge	\$3,100.00	
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$184,085.00
Less Customer Allowance:		(\$51,965.95)
Total Vehicle Price:		\$132,119.05
Total Body/Allied Equipment:		\$150,427.35
Total Sale Price:		\$282,546.40
Total Per Vehicle Sales Price:		\$282,546.40
Total Net Sales Excluding Taxes:		\$282,546.40
Arizona Tire Tax, 10 Tires 4.66x10	\$46.66	
Sales Tax, Pima County	\$17,235.33	
Total Taxes:		\$17,281.99
Net Sales Price:		\$299,828.39

State Contract CTR069476

If applicable, Federal Excise Tax (FET) is included in the net sales price above.

Terms of payment are cash on delivery and prices quoted are FOB Phoenix, AZ (unless otherwise noted).

This quote is good for 30 days. All inventory units are subject to prior sale. Unless otherwise noted, the quote above does NOT include title and licensing charges or Arizona state sales tax.

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Official Title and Date

Authorized Signature

Accepted by Purchaser:

Firm or Business Name

Authorized Signature and Date

**This proposal is not binding upon the seller without
Seller's Authorized Signature**

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.



KEEPING YOU IN SERVICE

3202 W Durango St.

Phoenix, AZ 85009

www.shortequipment.com

Direct: 623-715-6129

Office: 480-999-5455

Prepared by: Andrew DiPietro

DATE	1/12/2026
QUOTE #	4026
VALID FOR	30 Days
TERMS	Net 30

CUSTOMER

Town of Jerome

TERMS AND CONDITIONS

1. Does not include taxes or fees unless otherwise noted
2. Valid for 30 days unless otherwise noted
3. Please return after signing or submit PO to confirm

Customer Acceptance (sign below):

x _____ Date: _____

Print Name:

Subtotal	273,707.00
Taxable	
Tax rate	
Tax due	-
Other	-
TOTAL	\$ 273,707.00

If you have any questions about this price quote, please contact

Zac Short - zac@shortequipment.com

Thank You For Your Business!



A Product of **Scranton Mfg. Co., Inc.** • 101 State Street • Scranton, IA 51462
T 800 831 1858 • F 712 652 3399 • www.newwaytrucks.com

Sales Order 194829

Item A.

Entered by: Peyton Smith

psmith@newwaytrucks.com

Page: 1 of 4

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

Bill To:	Sold To:	Ship To:
I-State Truck Center 4801 Harbor Dr Sioux City, IA 51111 United States	I-State Truck Center 4801 Harbor Dr Sioux City IA 51111 United States	AJ McCaffrey I-State Truck Center 4801 Harbor Dr Sioux City IA 51111 United States

Fax: (712) 233-2690
Email: aj.mccaffrey@istatetruck.
Phone: (800) 831-0967

Order Date:	Need By:	PO Number:	Terms:	Ship Via:
4/11/2025	6/30/2025	N262016979	No Terms	Drive Out

Line	Part Number/Description	Order Qty	Unit Price	Ext. Price
1	8048 REARLOADER, COBRA MAGNUM, 25 YD	1.000000 EA		
	137649 OPT, KICKBAR, BOLT-ON, KC CM, HC	1		
	135752 OPT, REEVING WINCH, BOLT ON, KC CM	1		
	114499 OPT, 2X VALVE, HANDLE, ROD, KC CM, HC	1		
	111549 OPT, CONT STOP, BUMPER, KC CM	1		
	119696 OPT, 1X VALVE, CT EXT PIVOT LINKAGE, RT, KC CM, HC	1		
	145080 OPT, EXT LOADSILL, LIGHT BOX, KICKBAR EARS, KC CM, CM, HC, 80IN	1		
	116957 OPT, HYD TUBE, FUT CT, RT, KC CM	1		
	119397 OPT, BROOM/SHOVEL RACK, KC, CM, RL, RS	1		
	Option Comment: Streetside tailgate			
	115926 OPT, ACCESS LADDER, RL, KC CM, STD	1		
	133582 OPT, PAINT WHITE, KC CM	1		
	Option Comment: N0006EX			
	114995 OPT, BCKUP LIGHTS, LED, MID BODY, ALL	1		
	104194 OPT, WORKLIGHT, LED, IN HPR, RS, RL, KC CM	1		
	114142 OPT, WORKLIGHT, LED, OUT HPR, RS, RL, KC CM	1		
	115610 OPT, STROBE, 2 RND, INTEGRATED, UPR TG, RS, RL, KC CM	1		



A Product of **Scranton Mfg. Co., Inc.** • 101 State Street • Scranton, IA 51462
T 800 831 1858 • F 712 652 3399 • www.newwaytrucks.com

Sales Order 194829

Item A.

Entered by: Peyton Smith

psmith@newwaytrucks.com

Page: 2 of 4

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

137670	1
OPT,STROBE,2 RND,INTEGRATED,LWR TG,RS,RL,KC CM	
121367	1
OPT,STROBE,BH,2 RND,INTEGRATED,KC CM	
136581	1
OPT,1 CAMERA SYSTEM,7IN MONITOR,SAFETY VISION	
127005	1
WARRANTY,1YR HYD,1YR BODY,2YR CYL	
100544	1
OPT,MNT,25,27,32,KC CM	
104203	1
OPT,PTO,AUTO,HOTSHIFT,OVERSPEED	
115384	1
OPT,PACK ON THE GO	
135086	1
OPT,REM GREASE,TG HINGE&TG LIFT CYL,KC CM,HC	
141348	1
OPT,HYD,NYLON WRAPPED,KC,CM,25	
124738	1
OPT,PRESSURE GAUGE,QUICK DISC	
137834	1
OPT,MUDFLAP,REAR,LOGO,KC CM,HC	
113305	1
OPT,FIRE EXT,10 LB	
119201	1
OPT,TRIANGLE,SAFETY,ROADSIDE	



A Product of **Scranton Mfg. Co., Inc.** • 101 State Street • Scranton, IA 51462
T 800 831 1858 • F 712 652 3399 • www.newwaytrucks.com

Sales Order 194829

Item A.

Entered by: Peyton Smith

psmith@newwaytrucks.com

Page: 3 of 4

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

Rel	Date	Quantity	From	Make	VIN Number	Chassis ETA
1	6/30/2025	1.000000	SCRANTON	Freigh	3ALHCYFEXTDWJ0032	02/11/2025

Chassis Vendor: I-State	Kill Switch: False	Axle Type: Tandem
Chassis Make: Freigh	Fuel Type: Diesel	Exhaust: Vertical_R
Chassis Model: M2106P	Fuel Additive: True	Paint Code: White
Chassis VIN: 3ALHCYFEXTDWJ003 2	Fuel Level: 1_4	Number of Keys: 2

Chassis Arrival Date: 3/18/2025
Predrilled: False

GVWR: 62,000.00

GAWR Front: 18,000.00 **GAWR 2ND Inter.:** 23,000.00

GAWR Front Tire Size:

GAWR 2ND Inter Tire Size:

GAWR Front Rim Size: 225x1225

GAWR 2ND Inter Rim Size: 225x825

GAWR 1ST Inter.: 230,000.00

GAWR Rear: 0.00

GAWR 1ST Inter Tire Size:

GAWR Rear Tire Size:

GAWR 1ST Inter Rim Size: 225x825

GAWR Rear Rim Size:

CA / CT: 164.00

PTO Opening:

Engine: Cum_L9

Frame Height: 43.00

Front Mount: False

Transmission: 3000RDS

Frame Width: 34.50

Top: False

Suspension: Spring

Under Frame: 32.00

Left: True

Abnormalities:

Wheel Base: 232.00

Right: True

Problems: False

Outside Rear Wheels: 96.00

After Frame: 69.00

Under Drive Shaft: 25.00

Chassis Comment:

OrderAck:003:02

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

Order Confirmation Agreement

Order #194829

Thank you for your order. This document is your official order Confirmation Agreement and requires your attention.

A signed Confirmation Agreement is required to be on file. A Confirmation Agreement must include a chassis vehicle identification number (VIN), estimated date of chassis delivery, and pertinent chassis specifications (Not applicable for ship out bodies). This order will be scheduled for production following receipt of chassis and confirmation it meets the required specifications. This order may be subject to a price adjustment based on chassis delivery date.

We ask that you carefully review the complete order, paying special attention to:

- Options
- Pricing
- Paint code(s)

If any item is not correct, please do not sign this Confirmation Agreement and contact your Sales Assistant or Regional Sales Manager to correct the order and generate a revised Confirmation Agreement.

By signing this confirmation, Customer authorizes New Way to finalize order as attached and submit for scheduling and processing. To avoid any additional charges, Customer further agrees that chassis specifications comply with New Way Engineering Department requirements.

Any changes to this order will render this confirmation null and void and may result in delays or additional charges.

Print Name: _____

APPROVED

aj.mccaffrey , 4/24/2025, 2:21:26 pm

Signature: _____

Authorized Representative of I-State Truck Center

Date: _____

Prepared for:
SCRANTON MFG CO INC BB
101 STATE ST
SCRANTON, IA 51462
Phone: 712-652-3396

Prepared by:
A j McCaffrey
I-STATE TRUCK CENTER
4801 HARBOR DRIVE
SIOUX CITY, IA 51111
Phone: 712-252-2714
E-Mail:
Aj.McCaffrey@istatetruck.com

Item A.

S P E C I F I C A T I O N P R O P O S A L

Description	Weight Front	Weight Rear
Price Level		
M2 PRL-29M (EFF:MY26 ORDERS)		
Data Version		
SPECPRO21 DATA RELEASE VER 008		
Vehicle Configuration		
M2 106 PLUS CONVENTIONAL CHASSIS	5,709	3,450
2026 MODEL YEAR SPECIFIED		
SET BACK AXLE - TRUCK		
STRAIGHT TRUCK PROVISION, NON-TOWING		
LH PRIMARY STEERING LOCATION		
General Service		
TRUCK CONFIGURATION		
DOMICILED, USA 50 STATES (EPA CLEAN IDLE LABEL OR NO CLEAN IDLE REQUIRED)		
EPA CLEAN IDLE LABEL - (INCLUDES 6X4 INCH LABEL ON LOWER FORWARD OF DRIVER DOOR)		
REFUSE SERVICE		
SANITATION BUSINESS SEGMENT		
MOIST BULK COMMODITY		
TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS		
MAXIMUM 8% EXPECTED GRADE		
SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE		
MEDIUM TRUCK WARRANTY		
EXPECTED FRONT AXLE(S) LOAD : 18000.0 lbs		
EXPECTED REAR DRIVE AXLE(S) LOAD : 44000.0 lbs		
EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 62000.0 lbs		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

	Description	Weight Front	Weight Rear
Truck Service	REFUSE, SIDE LOAD OR REAR PACKER BODY - UNLOADS IN A LANDFILL SCRANTON MANUFACTURING/NEW WAY EXPECTED BODY/PAYLOAD CG HEIGHT ABOVE FRAME "XX" INCHES : 32.0 in		
Engine	CUM L9 360 HP @ 2200 RPM, 2200 GOV RPM, 1150 LB-FT @ 1200 RPM, REFUSE	640	30
Electronic Parameters	66 MPH ROAD SPEED LIMIT CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT PTO MODE ENGINE RPM LIMIT - 1250 RPM PTO MODE THROTTLE OVERRIDE - LIMIT TO 1250 RPM PTO RPM WITH CRUISE SET SWITCH - 1200 RPM PTO RPM WITH CRUISE RESUME SWITCH - 1100 RPM PTO MODE CANCEL VEHICLE SPEED - 5 MPH PTO GOVERNOR RAMP RATE - 1000 RPM PER SECOND ONE REMOTE PTO SPEED PTO SPEED 1 SETTING - 1200 RPM PTO MINIMUM RPM - 700 REGEN INHIBIT SPEED THRESHOLD - 5 MPH PTO 1, WITH SWITCH, TEM SUPPLIED REQUEST AND INTERLOCKS, WITH PTO CONNECTIONS, NO FACTORY INTERLOCKS ENGINE MOUNT PTO, NO SWITCH, TEM SUPPLIED REQUEST, DRIVING INTERLOCKS		
Engine Equipment	EPA 2010/GHG 2024 CONFIGURATION STANDARD OIL PAN ENGINE MOUNTED OIL CHECK AND FILL SIDE OF HOOD AIR INTAKE WITH DONALDSON HIGH CAPACITY AIR CLEANER WITH SAFETY ELEMENT, FIREWALL MOUNTED DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
(2) DTNA GENUINE, FLOODED STARTING, MIN 2000CCA, 370RC, THREADED STUD BATTERIES	10	
BATTERY BOX FRAME MOUNTED		
STANDARD BATTERY JUMPERS		
SINGLE BATTERY BOX FRAME MOUNTED LH SIDE UNDER CAB		
WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN		
NON-POLISHED BATTERY BOX COVER		
NON-ESSENTIAL POSITIVE LOAD DISCONNECT, IN CAB CONTROL SWITCH MOUNTED OUTBOARD OF DRIVER SEAT	2	
POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER	2	
PROGRESSIVE LOW VOLTAGE DISCONNECT AT 12.3 VOLTS FOR DESIGNATED CIRCUITS	2	
CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE		
STANDARD MECHANICAL AIR COMPRESSOR GOVERNOR		
AIR COMPRESSOR DISCHARGE LINE		
ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM		
CUMMINS ENGINE INTEGRAL BRAKE WITH VARIABLE GEOMETRY TURBO ON/OFF	20	
RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE	30	25
ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND VIRTUAL REGENERATION REQUEST SWITCH IN CLUSTER		
11 FOOT 06 INCH (138 INCH+0/-5.9 INCH) EXHAUST SYSTEM HEIGHT		
STANDARD CURVE BRIGHT UPPER STACK(S)		
RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP		
13 GALLON DIESEL EXHAUST FLUID TANK	35	10
100 PERCENT DIESEL EXHAUST FLUID FILL		
POLISHED ALUMINUM DIAMOND PLATE DIESEL EXHAUST FLUID TANK COVER	15	5
LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION		
STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
STANDARD DIESEL EXHAUST FLUID TANK CAP		
STAINLESS STEEL AFTERTREATMENT DEVICE/MUFFLER/TAIPIPE SHIELD		
HIGH SPEED AIR POWERED ON/OFF ENGINE FAN CLUTCH		
AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED		
CUMMINS SPIN ON FUEL FILTER		
COMBINATION FULL FLOW/BYPASS OIL FILTER		
NO COOLANT FILTER	-10	
1100 SQUARE INCH ALUMINUM RADIATOR	70	
ANTIFREEZE TO -34F, ETHYLENE GLYCOL PRE- CHARGED SCA HEAVY DUTY COOLANT		
GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT		
CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES		
RADIATOR DRAIN VALVE		
LOWER RADIATOR GUARD		
PHILLIPS-TEMRO 1000 WATT/115 VOLT BLOCK HEATER	4	
CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR		
ALUMINUM FLYWHEEL HOUSING		
ELECTRIC GRID AIR INTAKE WARMER		
DELCO 12V 39MT HD/OCP STARTER WITH THERMAL PROTECTION AND INTEGRATED MAGNETIC SWITCH	15	

Transmission

ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION	200	60
---	-----	----

Transmission Equipment

ALLISON VOCATIONAL PACKAGE 170 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODEL RDS AND EVS
ALLISON VOCATIONAL RATING FOR REFUSE APPLICATIONS AVAILABLE WITH ALL PRODUCT FAMILIES
PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY
SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
S1 PERFORMANCE PRIMARY SHIFT SCHEDULE, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY		
S1 PERFORMANCE SECONDARY SHIFT SCHEDULE, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY		
2000 RPM PRIMARY MODE SHIFT SPEED		
2000 RPM SECONDARY MODE SHIFT SPEED		
ENGINE BRAKE RANGE PRESELECT RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE		
ENGINE BRAKE RANGE ALTERNATE PRESELECT RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE		
FUEL SENSE 2.0 MAX - DYNACTIVE: PERFORMANCE, NEUTRAL AT STOP: ACTIVE, ACCELERATION RATE MANAGEMENT: ACTIVE		
DRIVER SWITCH INPUT - DEFAULT - NO SWITCHES		
QUICKFIT BODY LIGHTING CONNECTOR UNDER CAB, WITHOUT CAP		
ELECTRONIC TRANSMISSION WIRING TO CUSTOMER INTERFACE CONNECTOR		
CUSTOMER INSTALLED CHELSEA 281 SERIES PTO	50	
PTO MOUNTING, LH SIDE OF MAIN TRANSMISSION ALLISON		
MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN		
PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED		
TRANSMISSION PROGNOSTICS - ENABLED 2013		
WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK	15	
TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK		
ATF-SYNTHETIC AUTOMATIC TRANSMISSION FLUID		

Front Axle and Equipment

DETROIT DA-F-18.0-5 18,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE	210
MERITOR 16.5X6 Q+ CAST SPIDER HEAVY DUTY CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES	
NON-ASBESTOS FRONT BRAKE LINING	

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
CONMET CAST IRON FRONT BRAKE DRUMS		
FRONT BRAKE DUST SHIELDS	5	
FRONT OIL SEALS		
VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL		
STANDARD SPINDLE NUTS FOR ALL AXLES		
MERITOR AUTOMATIC FRONT SLACK ADJUSTERS		
TRW TAS-85 POWER STEERING	40	
POWER STEERING PUMP		
2 QUART SEE THROUGH POWER STEERING RESERVOIR		
OIL/AIR POWER STEERING COOLER	5	
CURRENT AVAILABLE SYNTHETIC 75W-90 FRONT AXLE LUBE		

Front Suspension

20,000# TAPERLEAF FRONT SUSPENSION	200
MAINTENANCE FREE RUBBER BUSHINGS - FRONT SUSPENSION	
FRONT SHOCK ABSORBERS	

Rear Axle and Equipment

MERITOR RT-46-160 46,000# R-SERIES TANDEM REAR AXLE	2,960	
6.14 REAR AXLE RATIO		
IRON REAR AXLE CARRIER WITH STANDARD AXLE HOUSING		
MXL 176T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES	25	25
MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES		
DRIVER CONTROLLED TRACTION DIFFERENTIAL - BOTH TANDEM REAR AXLES		30
(1) INTERAXLE LOCK VALVE, (1) DRIVER CONTROLLED DIFFERENTIAL LOCK FORWARD- REAR AND REAR-REAR AXLE VALVE		
INDICATOR LIGHT FOR EACH INTERAXLE LOCKOUT SWITCH, DISENGAGE INTERAXLE LOCK WITH IGNITION OFF		
INDICATOR LIGHT FOR EACH DIFFERENTIAL LOCKOUT SWITCH, ENGAGE AT SPEEDS 5PMMPH OR LESS, DISENGAGE W/IGN OFF		
MERITOR 16.5X8.62 Q+ CAST SPIDER HEAVY DUTY CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES		
NON-ASBESTOS REAR BRAKE LINING		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
BRAKE CAMS AND CHAMBERS ON FORWARD SIDE OF DRIVE AXLE(S)		
CONMET CAST IRON REAR BRAKE DRUMS		
REAR BRAKE DUST SHIELDS	10	
REAR OIL SEALS		
BENDIX EVERSURE LONGSTROKE 2-DRIVE AXLES SPRING PARKING CHAMBERS	20	
HALDEX AUTOMATIC REAR SLACK ADJUSTERS		
CURRENT AVAILABLE SYNTHETIC 75W-90 REAR AXLE LUBE		
Rear Suspension		
TUFTRAC GEN2 46,000# REAR SPRING SUSPENSION	820	
9.5 INCH NOMINAL RIDE HEIGHT (460MM GLOBAL REFERENCE HEIGHT)		
AXLE CLAMPING GROUP		
55 INCH AXLE SPACING		
FORE/AFT AND TRANSVERSE CONTROL RODS		
REAR SHOCK ABSORBERS - TWO AXLES (TANDEM)	40	
Pusher / Tag Equipment		
NO PUSHER/TAG BRAKE DUST SHIELDS		
Brake System		
AIR BRAKE PACKAGE		
WABCO 4S/4M ABS WITH TRACTION CONTROL		
REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES		
FIBER BRAID PARKING BRAKE HOSE		
STANDARD BRAKE SYSTEM VALVES		
STANDARD AIR SYSTEM PRESSURE PROTECTION SYSTEM		
STD U.S. FRONT BRAKE VALVE		
RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE		
BW AD-9 BRAKE LINE AIR DRYER WITH HEATER	20	
AIR DRYER MOUNTED INBOARD ON LH RAIL		
STEEL AIR BRAKE RESERVOIRS		
PULL CABLES ON ALL AIR RESERVOIR(S)		
Trailer Connections		
NO TRAILER AIR HOSE		
NO AIR HOSE HANGER		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
NO TRAILER ELECTRICAL CABLE		
Wheelbase & Frame		
5850MM (230 INCH) WHEELBASE		
11/32X3-1/2X10-15/16 INCH STEEL FRAME (8.73MMX277.8MM/0.344X10.94 INCH) 120KSI	270	120
1/4 INCH (6.35MM) C-CHANNEL INNER FRAME REINFORCEMENT	170	390
1775MM (70 INCH) REAR FRAME OVERHANG FRAME OVERHANG RANGE: 61 INCH TO 70 INCH		
CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 164.76 in		
CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 161.76 in		
CALC'D FRAME LENGTH - OVERALL : 329.6 in		
CALCULATED FRAME SPACE LH SIDE : 88.93 in		
CALCULATED FRAME SPACE RH SIDE : 110.31 in		
CALC'D SPACE AVAILABLE FOR DECKPLATE : 0.0 in		
SQUARE END OF FRAME		
FRONT CLOSING CROSSMEMBER		
LIGHTWEIGHT HEAVY DUTY ALUMINUM ENGINE CROSSMEMBER	-12	
STANDARD CROSSMEMBER BACK OF TRANSMISSION		
STANDARD MIDSHIP #1 CROSSMEMBER(S)		
STANDARD REARMOST CROSSMEMBER		
HEAVY DUTY SUSPENSION CROSSMEMBER		30
Chassis Equipment		
THREE-PIECE 14 INCH CHROMED STEEL BUMPER WITH COLLAPSIBLE ENDS	30	
FRONT TOW HOOKS - FRAME MOUNTED	15	
BUMPER MOUNTING FOR SINGLE LICENSE PLATE		
NO MUDFLAP BRACKETS		
NO REAR MUDFLAPS		
FENDER AND FRONT OF HOOD MOUNTED FRONT MUDFLAPS		
GRADE 8 THREADED HEX HEADED FRAME FASTENERS		
EXTERIOR HARNESSES WRAPPED IN ABRASION TAPE		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
CLEAR FRAME RAILS FROM BACK OF CAB TO FRONT REAR SUSPENSION BRACKET, BOTH RAILS OUTBOARD		
Fifth Wheel		
NO FIFTH WHEEL		
Fuel Tanks		
80 GALLON/302 LITER RECTANGULAR ALUMINUM FUEL TANK - LH	40	10
RECTANGULAR FUEL TANK(S)		
PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH PAINTED BANDS		
FUEL TANK(S) FORWARD		
10 GALLONS ADDITIONAL FUEL		
PLAIN STEP FINISH		
FUEL TANK CAP(S)		
DETROIT FUEL/WATER SEPARATOR WITH WATER IN FUEL SENSOR, HAND PRIMER AND 12 VOLT PREHEATER"	-5	
EQUIFLO INBOARD FUEL SYSTEM		
HIGH TEMPERATURE REINFORCED NYLON FUEL LINE		
FUEL COOLER	10	
Tires		
MICHELIN XZY-3 385/65R22.5 18 PLY RADIAL FRONT TIRES	130	
MICHELIN X MULTI D+ 11R22.5 16 PLY RADIAL REAR TIRES	120	
Hubs		
CONMET PRESET PLUS PREMIUM IRON FRONT HUBS		
CONMET PRESET PLUS PREMIUM IRON REAR HUBS		
Wheels		
ACCURIDE 29374A 22.5X12.25 10-HUB PILOT 4.75 INSET 10-HAND ALUMINUM DISC FRONT WHEELS	-8	
ALCOA 88167X 22.5X8.25 10-HUB PILOT ALUMINUM DISC REAR WHEELS	-248	
POLISHED FRONT WHEELS; INSIDE AND OUTSIDE		
POLISHED REAR WHEELS; OUTSIDE OF OUTER WHEELS ONLY		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
FRONT WHEEL MOUNTING NUTS		
REAR WHEEL MOUNTING NUTS		
Cab Exterior		
106 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB		
AIR CAB MOUNTING		
NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE		
2-1/2 INCH FENDER EXTENSIONS	10	
LH AND RH GRAB HANDLES		
HOOD MOUNTED CHROMED PLASTIC GRILLE		
CHROME HOOD MOUNTED AIR INTAKE GRILLE		
FIBERGLASS HOOD		
TUNNEL/FIREWALL LINER		
DUAL 26 INCH RECTANGULAR POLISHED ALUMINUM AIR HORNS ROOF MOUNTED	8	
SINGLE ELECTRIC HORN		
DUAL HORN SHIELDS		
REAR LICENSE PLATE MOUNT END OF FRAME		
LED HEADLIGHT ASSEMBLY AND INCANDESCENT MARKER/TURN LAMP WITH CHROME BEZEL		
LED AERODYNAMIC MARKER LIGHTS		
DAYTIME RUNNING LIGHTS		
OMIT STOP/TAIL/BACKUP LIGHTS AND PROVIDE WIRING WITH SEPARATE STOP/TURN WIRES TO 4 FEET BEYOND END OF FRAME	-5	
STANDARD FRONT TURN SIGNAL LAMPS		
DUAL WEST COAST BRIGHT FINISH HEATED MIRRORS WITH LH AND RH REMOTE		
DOOR MOUNTED MIRRORS		
102 INCH EQUIPMENT WIDTH		
LH AND RH 8 INCH BRIGHT FINISH CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS		
STANDARD SIDE/REAR REFLECTORS		
RH AFTERTREATMENT SYSTEM CAB ACCESS WITH POLISHED DIAMOND PLATE COVER		
PARK BRAKE REMINDER WARNING SYSTEM		
COMPOSITE EXTERIOR SUN VISOR	10	
63X14 INCH TINTED REAR WINDOW		
TINTED DOOR GLASS LH AND RH WITH TINTED NON-OPERATING WING WINDOWS		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
RH AND LH ELECTRIC POWERED WINDOWS		
1-PIECE SOLAR GREEN GLASS WINDSHIELD		
2 GALLON WINDSHIELD WASHER RESERVOIR WITH FLUID LEVEL INDICATOR, FRAME MOUNTED		
WHITE WINTERFRONT	2	
Cab Interior		
RUGGED TRIM PACKAGE		
GRAY & CARBON VINYL INTERIOR "RUGGED"		
CARBON WITH PREMIUM GUNMETAL ACCENT (RUGGED)		
MOLDED DOOR PANEL		
MOLDED PLASTIC DOOR PANEL		
BLACK MATS WITH SINGLE INSULATION		
(1) DASH MOUNTED 12V POWER OUTLET, (1) DASH MOUNTED DUAL USB-C OUTLET		
FORWARD ROOF MOUNTED CONSOLE		
LH AND RH DOOR STORAGE POCKETS INTEGRATED INTO MOLDED DOOR PANELS		
DIGITAL ALARM CLOCK IN DRIVER DISPLAY		
(2) CUP HOLDERS LH AND RH DASH		
M2/SD DASH		
HEATER, DEFROSTER AND AIR CONDITIONER		
STANDARD HVAC DUCTING		
MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH		
STANDARD HEATER PLUMBING WITH BALL SHUTOFF VALVES AT SUPPLY LINES ONLY		
VALEO HEAVY DUTY A/C REFRIGERANT COMPRESSOR		
BINARY CONTROL, R-134A		
PREMIUM INSULATION		
SOLID-STATE CIRCUIT PROTECTION AND FUSES		
12V NEGATIVE GROUND ELECTRICAL SYSTEM		
PREMIUM LED CAB LIGHTING		
REMOTE KEYLESS ENTRY AND 2 TRANSMITTERS	2	
DOOR LOCKS AND IGNITION SWITCH KEYED THE SAME		
KEY QUANTITY OF 2		
LH AND RH ELECTRIC DOOR LOCKS		
NO MATTRESS	-20	-15

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
BASIC ISRINGHAUSEN HIGH BACK AIR SUSPENSION DRIVERS SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION	30	
2 MAN TOOL BOX MID BACK NON SUSPENSION PASSENGER SEAT WITH HEADRESTS, SEATS INC.	20	
INBOARD DRIVER SEAT ARMREST, NO PASSENGER SEAT ARMREST	2	
LH AND RH INTEGRAL DOOR PANEL ARMRESTS		
BLACK CORDURA PLUS CLOTH DRIVER SEAT COVER		
BLACK CORDURA PLUS CLOTH PASSENGER SEAT COVER		
BLACK SEAT BELTS		
ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN		
4-SPOKE 18 INCH (450MM) BLACK STEERING WHEEL WITH CHROME SWITCH BEZEL		
DRIVER AND PASSENGER INTERIOR SUN VISORS		

Instruments & Controls

8 EXTRA PROGRAMMABLE SWITCHES/INDICATORS
 ELECTRONIC ACCELERATOR CONTROL
 NO INSTRUMENT PANEL-DRIVER
 FULLY CONFIGURABLE CENTER INSTRUMENT PANELS
 ENGINE REMOTE INTERFACE WITHOUT INTERLOCKS
 BRIGHT ARGENT FINISH GAUGE BEZELS
 LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM
 (1) PNEUMATIC SINGLE BRAKE APPLICATION AIR GAUGE
 DUAL NEEDLE PRIMARY AND SECONDARY AIR PRESSURE GAUGE
 ELECTRONIC AIR RESTRICTION INDICATOR DISPLAYED IN DRIVER DISPLAY
 ELECTRONIC CRUISE CONTROL WITH CONTROLS ON STEERING WHEEL SPOKES
 KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY
 PREMIUM INSTRUMENT CLUSTER WITH 5.0 INCH TFT COLOR DISPLAY

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
DIGITAL PANEL LAMP DIMMER SWITCH IN DRIVER DISPLAY		
HEAVY DUTY ONBOARD DIAGNOSTICS INTERFACE CONNECTOR LOCATED BELOW LH DASH		
2 INCH ELECTRIC FUEL GAUGE		
ENGINE REMOTE INTERFACE FOR REMOTE THROTTLE		
POWERTRAIN INTERFACE CONNECTOR LOCATED BETWEEN SEATS WITHOUT CAPS		
QUICKFIT PROGRAMMABLE INTERFACE CONNECTOR(S) UNDER CAB WITH CAP		
ENGINE REMOTE INTERFACE CONNECTOR AT POWERTRAIN INTERFACE CONNECTOR		
TMC RP170 INTERFACE CONNECTOR		
ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE		
DIGITAL TRANSMISSION OIL TEMPERATURE IN DRIVER DISPLAY		
ELECTRONIC OUTSIDE TEMPERATURE SENSOR DISPLAY IN DRIVER MESSAGE CENTER		
ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY		
PTO CONTROLS FOR ENHANCED VEHICLE ELECTRIC/ELECTRONIC ARCHITECTURE		
NO OBSTACLE DETECTION SYSTEM		
NO DR ASSIST SYSTEM		
NO CAMERA/VIDEO/IMAGING SYSTEM		
NO VEHICLE STABILITY ADVISOR OR CONTROL		
NO LANE DEPARTURE WARNING SYSTEM		
ELECTRIC ENGINE OIL PRESSURE GAUGE		
NO OVERHEAD INSTRUMENT PANEL		
1 QUICKFIT PROGRAMMABLE MODULE (QPM/XMC)	10	
7" B-PANEL INTERACTIVE TOUCHSCREEN DISPLAY RADIO W/ USB-C, APPLE CARPLAY, ANDROID AUTO, BLUETOOTH/AM/FM/SXM/WB, WITH MICROPHONE		
DASH MOUNTED RADIO		
(2) RADIO SPEAKERS IN CAB		
NO AM/FM RADIO ANTENNA		
POWER AND GROUND WIRING PROVISION OVERHEAD		

Prepared for:
SCRANTON MFG CO INC BB
101 STATE ST
SCRANTON, IA 51462
Phone: 712-652-3396

Prepared by:
A j McCaffrey
I-STATE TRUCK CENTER
4801 HARBOR DRIVE
SIOUX CITY, IA 51111
Phone: 712-252-2714
E-Mail:
Aj.McCaffrey@istatetruck.com

Item A.

Description	Weight Front	Weight Rear
ROOF/OVERHEAD CONSOLE CB RADIO PROVISION		
MULTI-BAND AM/FM/WB/CB LH MIRROR MOUNTED ANTENNA SYSTEM		
NO MULTIBAND ANTENNA		
INTEROPERABLE SDAR ANTENNA, SHIP LOOSE		
STANDARD RADIO WIRING WITH STEERING WHEEL CONTROLS		
ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITHOUT ODOMETER		
STANDARD VEHICLE SPEED SENSOR		
ELECTRONIC 3000 RPM TACHOMETER		
DETROIT CONNECT PLATFORM HARDWARE		
3 YEARS DAIMLER CONNECTIVITY BASE PACKAGE ON (FEATURES VARY BY MODEL) POWERED BY DETROIT CONNECT ON CUMMINS ENGINES		
TMC RP1226 ACCESSORY CONNECTOR LOCATED BEHIND PASSENGER SIDE REMOVEABLE DASH PANEL		
IGNITION SWITCH CONTROLLED ENGINE STOP		
PRE-TRIP INSPECTION FEATURE FOR EXTERIOR LAMPS ONLY		
(1) OVERHEAD MOUNTED LANYARD CONTROL FOR DRIVER AIR HORN		
WORK BRAKE WITH RETURN TO GEAR, AUTO NEUTRAL, FOR DRIVE AXLE SERVICE BRAKES		
DIGITAL TURBO AIR PRESSURE IN DRIVER DISPLAY		
DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY		
SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY		
ROTARY HEADLAMP SWITCH, MARKER LIGHTS/HEADLIGHTS SWITCH WITH PULL OUT FOR OPTIONAL FOG/ROAD LAMPS		
ONE VALVE PARKING BRAKE SYSTEM WITH DASH VALVE CONTROL AUTONEUTRAL AND WARNING INDICATOR		
SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, HEADLAMP FLASH, WASH/WIPE/INTERMITTENT		
INTEGRAL ELECTRONIC TURN SIGNAL FLASHER WITH 40 AMP (20 AMP PER SIDE) TRAILER LAMP CAPACITY		
NO WRG/SW-OPTL #2,CHAS,AIR		

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

	Description	Weight Front	Weight Rear
Design			
PAINT: ONE SOLID COLOR			
Color			
CAB COLOR A: ORANGE ELITE EY BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT SUNVISOR PAINTED SAME AS CAB COLOR A STANDARD E COAT/UNDERCOATING			
Certification / Compliance			
U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS			

T O T A L V E H I C L E S U M M A R Y

	Weight Front	Weight Rear	Total Weight
Factory Weight ⁺	8028 lbs	7887 lbs	15915 lbs
Total Weight ⁺	8028 lbs	7887 lbs	15915 lbs

Extended Warranty

TOWING: 1 YEAR/UNLIMITED MILES/KM EXTENDED TOWING
 COVERAGE \$1200 CAP FEX APPLIES

(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.


(***) All cost increases for major components (Engines, Transmissions, Axles, Front and Rear Tires) and government mandated requirements, tariffs, and raw material surcharges will be passed through and added to factory invoices.

Prepared for:
SCRANTON MFG CO INC BB
101 STATE ST
SCRANTON, IA 51462
Phone: 712-652-3396

Prepared by:
A j McCaffrey
I-STATE TRUCK CENTER
4801 HARBOR DRIVE
SIOUX CITY, IA 51111
Phone: 712-252-2714
E-Mail:
Aj.McCaffrey@istatetruck.com

Item A.

D I M E N S I O N S

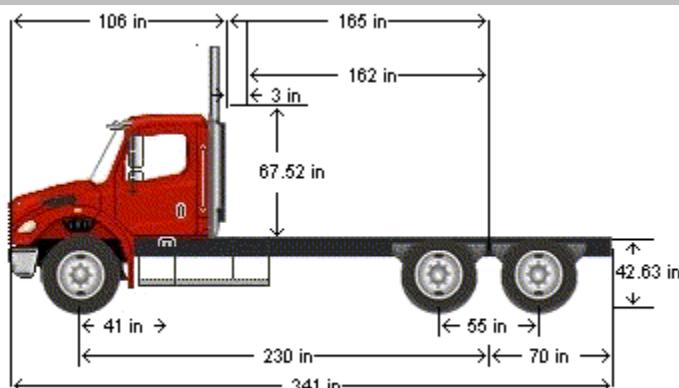

VEHICLE SPECIFICATIONS SUMMARY - DIMENSIONS

Model	M2106
Wheelbase (545)	5850MM (230 INCH) WHEELBASE
Rear Frame Overhang (552).....	1775MM (70 INCH) REAR FRAME OVERHANG
Fifth Wheel (578).....	NO FIFTH WHEEL
Mounting Location (577)	NO FIFTH WHEEL LOCATION
Maximum Forward Position (in).....	0
Maximum Rearward Position (in)	0
Amount of Slide Travel (in).....	0
Slide Increment (in).....	0
Desired Slide Position (in).....	0.0
Cab Size (829).....	106 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Sleeper (682).....	NO SLEEPER BOX/SLEEPERCAB
Exhaust System (016)	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE
Cab to Body Clearance (in).....	3.0

Prepared for:
 SCRANTON MFG CO INC BB
 101 STATE ST
 SCRANTON, IA 51462
 Phone: 712-652-3396

Prepared by:
 A j McCaffrey
 I-STATE TRUCK CENTER
 4801 HARBOR DRIVE
 SIOUX CITY, IA 51111
 Phone: 712-252-2714
 E-Mail:
 Aj.McCaffrey@istatetruck.com

Item A.

TABLE SUMMARY - DIMENSIONS

Dimensions	Inches
Bumper to Back of Cab (BBC)	106.3
Bumper to Centerline of Front Axle (BA)	40.7
Front Axle to Back of Cab (AC)	65.6
Min. Cab to Body Clearance (CB)	3.0
Back of Cab to Centerline of Rear Axle(s) (CA)	164.8
Effective Back of Cab to Centerline of Rear Axle(s) (Effective CA)	161.8
Back of Cab Protrusions (Exhaust/Intake) (CP)	2.0
Back of Cab Protrusions (Side Extenders/Trim Tab) (CP)	0.0
Back of Cab Protrusions (CNG Tank)	0.0
Back of Cab Clearance (CL)	3.0
Back of Cab to End of Frame	234.7
Cab Height (CH)	67.5
Wheelbase (WB)	230.3
Frame Overhang (OH)	69.9
Overall Frame Length	329.6
Overall Length (OAL)	341.0
Rear Axle Spacing	55.0
Unladen Frame Height at Centerline of Rear Axle	42.6


Performance calculations are estimates only. If performance calculations are critical, please contact Customer Application Engineering.

Prepared for:
SCRANTON MFG CO INC BB
101 STATE ST
SCRANTON, IA 51462
Phone: 712-652-3396

Prepared by:
Aj McCaffrey
I-STATE TRUCK CENTER
4801 HARBOR DRIVE
SIOUX CITY, IA 51111
Phone: 712-252-2714
E-Mail:
Aj.McCaffrey@istatetruck.com

Item A.

T U R N I N G R A D I U S

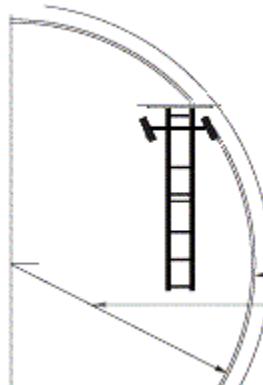

Turning radius graphic and data provided strictly for comparisons between model configurations. Weather, road surfaces, and tire treads affect the results. It is strongly suggested that actual vehicles be measured before constructing any roads/driveways using this information. For specific figures regarding your configuration, please contact your CAE representative.

	Dimensions	Tolerance
Wall to Wall Diameter (ft)	70.6	+/- 3.0
Curb to Curb Diameter (ft)	69.4	+/- 3.0
Turning Radius (ft)	34.0	+/- 1.5

VEHICLE SPECIFICATIONS SUMMARY - TURNING RADIUS

Model	M2106
Cab Size (829).....	106 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Wheelbase (545).....	5850MM (230 INCH) WHEELBASE
Front Tires (093).....	MICHELIN XZY-3 385/65R22.5 18 PLY RADIAL FRONT TIRES
Width (in).....	16.1
Front Axle (400).....	DETROIT DA-F-18.0-5 18,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE
Kingpin Intersection (in).....	71
Bumper (556)	THREE-PIECE 14 INCH CHROMED STEEL BUMPER WITH COLLAPSIBLE ENDS
Width (in).....	93.5
Bumper Miter to Front Axle (in).....	21.458
Primary Steering Location (003)	LH PRIMARY STEERING LOCATION
Steering Gear (536).....	TRW TAS-85 POWER STEERING
Dual Steering Gear.....	NONE
Ram.....	NONE
Rear Axle (420)	MERITOR RT-46-160 46,000# R-SERIES TANDEM REAR AXLE
Axle Spacing (624)	55 INCH AXLE SPACING

Prepared for:
SCRANTON MFG CO INC BB
101 STATE ST
SCRANTON, IA 51462
Phone: 712-652-3396

Prepared by:
A j Mccaffrey
I-STATE TRUCK CENTER
4801 HARBOR DRIVE
SIOUX CITY, IA 51111
Phone: 712-252-2714
E-Mail:
Aj.McCaffrey@istatetruck.com

Item A.

Performance calculations are estimates only. If performance calculations are critical, please contact Customer Application Engineering.



KEEPING YOU IN SERVICE

3202 W Durango St.

Phoenix, AZ 85009

www.shortequipment.com

Direct: 623-715-6129

Office: 480-999-5455

Prepared by: Andrew DiPietro

DATE	1/12/2026
QUOTE #	4025
VALID FOR	30 Days
TERMS	Net 30

CUSTOMER

Town of Jerome

TERMS AND CONDITIONS

- 1. Does not include taxes or fees unless otherwise noted
- 2. Valid for 30 days unless otherwise noted
- 3. Please return after signing or submit PO to confirm

Customer Acceptance (sign below):

x _____ Date: _____

Print Name:

Subtotal	207,500.00
Taxable	
Tax rate	
Tax due	-
Other	-
TOTAL	\$ 207,500.00

If you have any questions about this price quote, please contact

Zac Short - zac@shortequipment.com

Thank You For Your Business!



A Product of **Scranton Mfg. Co., Inc.** · 101 State Street · Scranton, IA 51462
 T 800 831 1858 · F 712 652 3399 · www.newwaytrucks.com

Sales Order 123755

Item A.

Entered by: Pam Beardmore

pbeardmore@newwaytrucks.com

Page: 1 of 3

This is **not** an invoice.
 Line Item Amounts and
 Charges Subject to Change.

Bill To:	Sold To:	Ship To:
Allstate Peterbilt of Rochester 610 Schumann Drive NW Rochester, MN 55976 United States	Allstate Peterbilt of Rochester 610 Schumann Drive NW Rochester MN 55976 United States	Allstate Peterbilt of Rochester 610 Schumann Drive NW Rochester MN 55976 United States

Fax: (507) 523-2293

Phone: (507) 523-2333

Order Date:	Need By:	PO Number:	Terms:	Ship Via:
6/9/2021	(See Below)	53-01-11671	No Terms	Drive Out

Line	Part Number/Description	Order Qty
------	-------------------------	-----------

1 8048 1.000000 EA
 REARLOADER,COBRA MAGNUM,25 YD

Rel	Date	Quantity	From	Make	VIN Number	Chassis ETA
1	2/28/2021	1.000000	SCRANTON	Peterbilt	2NP3LJ0X0NM802557	11/03/2021

Chassis Vendor: Allstate Refuse
 Chassis Make: Peterbilt
 Chassis Model: 348
 Chassis VIN: 2NP3LJ0X0NM802557
 Chassis Arrival Date: 11/3/2021

GVWR: 62,000.00

GAWR Front: 20,000.00	GAWR 2ND Inter.: 23,000.00
GAWR Front Tire Size: 315/80R22.5	GAWR 2ND Inter Tire Size: 11R22.5
GAWR Front Rim Size: 22.5X9	GAWR 2ND Inter Rim Size: 22.5X8.25
GAWR 1ST Inter.: 0.00	GAWR Rear: 23,000.00
GAWR 1ST Inter Tire Size:	GAWR Rear Tire Size: 11R22.5
GAWR 1ST Inter Rim Size:	GAWR Rear Rim Size: 22.5X8.25

CA / CT: 156.00	PTO Opening:	Engine: PX-9
Frame Height: 45.88	Front Mount: False	Transmission: 3000 RDS
Frame Width: 34.00	Top: False	Suspension: SPRING
Under Frame: 34.25	Left: True	Abnormalities:
Wheel Base: 232.00	Right: True	Problems: True
Outside Rear Wheels: 95.00	After Frame: 70.25	
Under Drive Shaft: 24.00		

Chassis Comment:

2 135752 1.000000 EA
 OPT,REEVING WINCH,BOLT ON,KC CM

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

THE FOLLOWING 2 ITEMS INCLUDED W/ REEVER 1 VALVE/HANDLE & 1 CONTAINER STOP

3 114498 1.000000 EA
 OPT,1X VALVE,HANDLE,ROD,KC CM



A Product of **Scranton Mfg. Co., Inc.** · 101 State Street · Scranton, IA 51462
T 800 831 1858 · F 712 652 3399 · www.newwaytrucks.com

Sales Order 123755

Item A.

Entered by:Pam Beardmore

pbeardmore@newwaytrucks.com

Page: 2 of 3

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
4	111549	1.000000 EA	OPT,CONT STOP,BUMPER,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
5	119696	1.000000 EA	OPT,1X VALVE,CT EXT PIVOT LINKAGE,RT,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
6	137944	1.000000 EA	OPT,EXT LOADSILL,LIP AND LATCH,BOLT-ON KICKBAR EARS,KC CM,CMGEN2,80IN
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
	<i>LOWER LOADSILL 3" FOR A TOTAL OF 6".</i>		
7	116957	1.000000 EA	OPT,HYD TUBE,FUT CT,RT,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
8	133582	1.000000 EA	OPT,PAINT WHITE,KC CM N0006EX
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
9	104194	1.000000 EA	OPT,WORKLIGHT,LED,IN HPR,RS,RL,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
10	115610	1.000000 EA	OPT,STROBE,2 RND,INTEGRATED,UPR TG,RS,RL,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
11	137670	1.000000 EA	OPT,STROBE,2 RND,INTEGRATED,LWR TG,RS,RL,KC CM
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON
12	123305	1.000000 EA	OPT,1 CAMERA,5.6" MONITOR,SAFETY VISION
Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON



A Product of **Scranton Mfg. Co., Inc.** · 101 State Street · Scranton, IA 51462
T 800 831 1858 · F 712 652 3399 · www.newwaytrucks.com

Sales Order 123755

Item A.

Entered by:Pam Beardmore

pbeardmore@newwaytrucks.com

Page: 3 of 3

This is **not** an invoice.
Line Item Amounts and
Charges Subject to Change.

13 127005 1.000000 EA
WARRANTY,1YR HYD,1YR BODY,2YR CYL

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

14 100544 1.000000 EA
OPT,MNT,25,27,32,KC CM

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

15 104203 1.000000 EA
OPT,PTO,AUTO,HOTSHIFT,OVERSPEED

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

16 115384 1.000000 EA
OPT,PACK ON THE GO

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

17 113305 1.000000 EA
OPT,FIRE EXT,10 LB

Rel	Date	Quantity	From
1	2/28/2021	1.000000	SCRANTON

18 119201 1.000000 EA
OPT,TRIANGLE,SAFETY,ROADSIDE

Rel	Date	Quantity	From
1	1/15/2021	1.000000	SCRANTON